

INTERNATIONAL STANDARD



Optical fibres –

Part 1-44: Measurement methods and test procedures – Cut-off wavelength

IECNORM.COM : Click to view the full PDF of IEC 60793-1-44:2023 CMV



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2023 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IECNORM.COM : Click to view the full PDF of IEC 60103-1-44:2023 CMV

INTERNATIONAL STANDARD



Optical fibres –

Part 1-44: Measurement methods and test procedures – Cut-off wavelength

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.180.10

ISBN 978-2-8322-7323-4

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	5
1 Scope	7
2 Normative references	7
3 Terms and definitions	8
4 Background	8
5 Overview of methods	8
6 Reference test method	9
7 Apparatus	9
7.1 Light source	9
7.2 Modulation	10
7.3 Launch optics	10
7.4 Support and positioning apparatus	10
7.5 Deployment mandrel	10
7.5.1 General	10
7.5.2 Cable cut-off wavelength deployment, method A	10
7.5.3 Cable cut-off wavelength deployment, method B	11
7.5.4 Fibre cut-off wavelength deployment, method C	12
7.6 Detection optics	13
7.7 Detector assembly and signal detection electronics	14
7.8 Cladding mode stripper	14
8 Sampling and specimens	14
8.1 Specimen length	14
8.2 Specimen end face	14
9 Procedure	14
9.1 Positioning of specimen in apparatus	14
9.1.1 General requirements for all methods	14
9.1.2 Deployment requirements for each method	14
9.2 Measurement of output power	14
9.2.1 Overview	14
9.2.2 Bend-reference technique	15
9.2.3 Multimode-reference technique	16
10 Calculations	16
10.1 Bend-reference technique	16
10.2 Multimode-reference technique	16
10.3 Curve-fitting technique for improved precision (optional)	14
10.3.1 General	14
10.3.2 Step 1, define the upper wavelength region	14
10.3.3 Step 2, characterize the attenuation curve	14
10.3.4 Step 3, determine the upper wavelength of the transition region	14
10.3.5 Step 4, determine the lower wavelength of the transition region	14
10.3.6 Step 5, characterize the transition region with the theoretical model	14
10.3.7 Step 6, compute the cut-off wavelength, λ_c	14
11 Mapping functions	21
12 Results	21
13 Specification information	22

Annex A (normative) Requirements specific to method A – Cable cut-off wavelength, λ_{CC} , using uncabled fibre.....	23
A.1 Specimen length.....	23
A.2 Procedure – Position specimen on deployment mandrel.....	23
Annex B (normative) Requirements specific to method B – Cable cut-off wavelength, λ_{CC} , using cabled fibre	24
B.1 Specimen length.....	24
B.2 Procedure – Position specimen on deployment mandrel.....	24
Annex C (normative) Requirements specific to method C – Fibre cut-off wavelength, λ_C	25
C.1 Specimen length.....	25
C.2 Procedure – Position specimen on deployment mandrel.....	25
Annex D (informative) Cut-off curve artifacts	27
D.1 Description of curve artifacts.....	27
D.2 Curve-fitting technique for artifact filtering	27
D.2.1 Overview.....	27
D.2.2 General.....	28
D.2.3 Step 1: define the upper wavelength region	29
D.2.4 Step 2: characterize the spectral transmittance	29
D.2.5 Step 3: calculate the deviation of the spectral transmittance from the linear fit.....	29
D.2.6 Step 4: determine the end wavelength of the transition region.....	30
D.2.7 Step 5: determine the start wavelength of the transition region.....	30
D.2.8 Step 6: characterize the transition region with the theoretical model.....	30
D.2.9 Step 7: compute the cut-off wavelength, λ_C	31
D.3 Fibre deployment method for artifact attenuation	32
Bibliography.....	34
List of comments.....	35
Figure 1 – Cut-off measurement system block diagram.....	9
Figure 2 – Deployment configuration for cable cut-off wavelength λ_{CC} , method A	11
Figure 3 – Deployment configuration for cable cut-off wavelength λ_{CC} , method B	12
Figure 3 – Default configuration to measure λ_C.....	12
Figure 4 – Deployment configurations for fibre cut-off measurement	13
Figure 4 – Standard deployment for fibre cut-off wavelength measurement	13
Figure 5 – Cut-off wavelength using the bend-reference technique	15
Figure 6 – Cut-off wavelength using the multimode-reference technique	15
Figure 7 – Cable cut-off vs fibre cut-off for a specific fibre (multimode reference).....	21
Figure A.1 – Alternative cable cut-off deployment.....	23
Figure C.1 – Alternative fibre cut-off deployment – Sliding semi-circle.....	25
Figure C.2 – Alternative fibre cut-off deployment – Multi-bend	26
Figure C.3 – Alternative fibre cut-off deployment – Large curve	26
Figure D.1 – Cut-off curve with linear fit error (multimode reference).....	27
Figure D.2 – Fibre cut-off curve fitting technique (multimode reference).....	28
Figure D.3 – Curve fitting regions	28

Figure D.4 – Fibre cut-off curve with artifacts (multimode reference).....	32
Figure D.5 – Fibre cut-off curve with artifacts (bend reference).....	32
Figure D.6 – Fibre deployment with large diameter bends for mode filtering	33
Figure D.7 – Fibre cut-off curve with mode attenuation (multimode reference).....	33

IECNORM.COM : Click to view the full PDF of IEC 60793-1-44:2023 CMV

INTERNATIONAL ELECTROTECHNICAL COMMISSION

OPTICAL FIBRES –

Part 1-44: Measurement methods and test procedures – Cut-off wavelength

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This commented version (CMV) of the official standard IEC 60793-1-44:2023 edition 3.0 allows the user to identify the changes made to the previous IEC 60793-1-44:2011 edition 2.0. Furthermore, comments from IEC SC 86A experts are provided to explain the reasons of the most relevant changes, or to clarify any part of the content.

A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text. Experts' comments are identified by a blue-background number. Mouse over a number to display a pop-up note with the comment.

This publication contains the CMV and the official standard. The full list of comments is available at the end of the CMV.

IEC 60793-1-44 has been prepared by subcommittee 86A: Fibres and cables, of IEC technical committee 86: Fibre optics. It is an International Standard.

This third edition cancels and replaces the second edition published in 2011. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) used the diameter of the fibre loops to describe deployment;
- b) added Annex D related to cut-off curve artifacts;
- c) reorganized information and added more figures to clarify concepts.

The text of this International Standard is based on the following documents:

Draft	Report on voting
86A/2314/FDIS	86A/2327/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

This document is to be read in conjunction with IEC 60793-1-1.

A list of all parts of the IEC 60793-1 series, published under the general title *Optical fibres – Measurement methods and test procedures*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

OPTICAL FIBRES –

Part 1-44: Measurement methods and test procedures – Cut-off wavelength

1 Scope

This part of IEC 60793 establishes uniform requirements for measuring the cut-off wavelength of single-mode optical fibre, thereby assisting in the inspection of fibres and cables for commercial purposes.

This document gives methods for measuring the cut-off wavelength ~~of fibre and cable~~ for uncabled or cabled single mode telecom fibre. These procedures apply to all category B and C fibre types.

~~There are two methods for measuring cable cut-off wavelength, λ_{cc} :~~

- ~~• Method A: using uncabled fibre;~~
- ~~• Method B: using cabled fibre.~~

~~There is only one method (Method C) for measuring fibre cut-off wavelength, λ_c .~~

~~The test method in this standard describes procedures for determining the cut-off wavelength of a sample fibre in either an uncabled condition (λ_c) or in a cable (λ_{cc}). Three default configurations are given here: any different configuration will be given in a detail specification. These procedures apply to all category B and C fibre types (see Normative references).~~

There are three methods of deployment for measuring the cut-off wavelength:

- method A: cable cut-off using uncabled fibre 22 m long sample, λ_{cc} ;
- method B: cable cut-off using cabled fibre 22 m long sample, λ_{cc} ;
- method C: fibre cut-off using uncabled fibre 2 m long sample, λ_c .

All methods require a reference measurement. There are two reference-scan techniques, either or both of which ~~may~~ can be used with all methods:

- bend-reference technique;
- multimode-reference technique using category A1(OM1-OM5) multimode fibre.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60793-1-1, *Optical fibres – Part 1-1: Measurement methods and test procedures – General and guidance*

~~IEC 60793-1-40, *Optical fibres – Part 1-40: Measurement methods and test procedures – Attenuation*~~

3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

4 Background

Theoretical cut-off wavelength is the shortest wavelength at which only the fundamental mode can propagate in a single-mode fibre, as computed from the refractive index profile of the fibre.

In optical fibres, the change from multimode to single mode behaviour does not occur at an isolated wavelength, but rather smoothly over a range of wavelengths. For purposes of determining fibre performance in a telecommunications network, theoretical cut-off wavelength is less useful than the lower value actually measured when the fibre is deployed.

Measured cut-off wavelength is defined as the wavelength greater than which the ratio between the total power, including launched higher-order modes, and the fundamental mode power has decreased to less than 0,1 dB. According to this definition, the second-order (LP_{11}) mode undergoes 19,3 dB more attenuation than the fundamental (LP_{01}) mode at the cut-off wavelength. 

Because measured cut-off wavelength depends on the length and bends of the fibre, the resulting value of cut-off wavelength depends on whether the measured fibre is configured in a deployed, cabled condition or if it is short and uncabled. Consequently, there are two overall types of cut-off wavelength:

- cable cut-off wavelength (λ_{co}) measured in an uncabled fibre deployment condition (method A), or in a cabled condition (method B);
- fibre cut-off wavelength (λ_c) measured on a short length of uncabled, primary-coated fibre (method C).

Cable cut-off wavelength is the preferred attribute to be specified and measured.

5 Overview of methods

~~All of the methods shall use the transmitted-power technique, which measures the variation with wavelength of the transmitted power of a fibre under test compared to a reference transmitted-power wavelength scan. The reference scan normalizes wavelength-dependent fluctuations in the measurement equipment so that the attenuation of the LP_{11} mode in the specimen can be properly characterized and the cut-off wavelength precisely determined.~~

All of the methods shall use the transmitted-power technique. A general system block diagram is depicted in Figure 1. A fibre specimen is scanned by a wavelength spectrum. The output optical power is measured and stored. This stored data is then analysed against a reference power spectrum. The reference scan normalizes any wavelength-dependent fluctuations in the measurement equipment that is not associated with the loss of the LP_{11} mode. The resulting attenuation will thus properly characterize the cut-off wavelength.

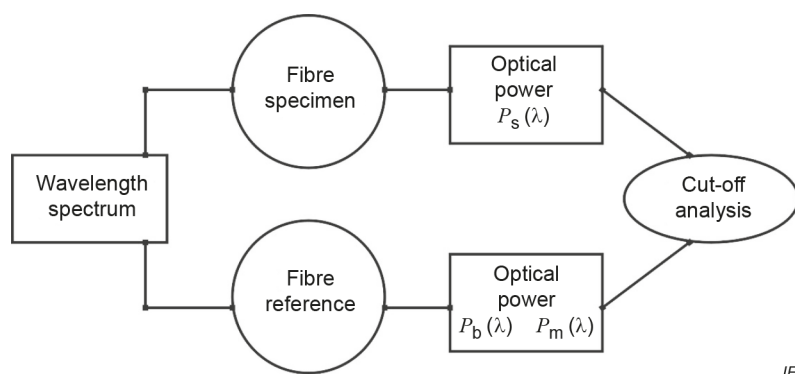


Figure 1 – Cut-off measurement system block diagram 2

The reference scan uses one of the following two techniques:

- ~~the specimen with an additional, smaller-radius fibre bend;~~
- ~~a (separate) category A1 multimode fibre.~~
- bend reference where a small diameter bend is added to the fibre specimen;
- multimode reference where the optical power through an A1(OM1-OM5) fibre is measured.

~~This procedure~~ Either reference technique can determine the cut-off wavelength of a fibre specimen in ~~either~~ a cabled or uncabled condition. ~~Each method has its own default configurations; the detail specification will give any different configuration required.~~

The fibre cut-off wavelength, λ_c , measured under the standard length and bend conditions described in this document, will generally exhibit a value larger than the cable cut-off wavelength, λ_{cc} . For normal installed cable spans, it is common for the measured λ_c value to exceed the ~~system~~ long fibre's transmission wavelength. ~~Thus Cable cut-off wavelength is the more useful description of system performance and capability.~~

~~For short cables, e.g. a pigtail with a length shorter (and possibly a bending radius larger) than described in this method, the cable may introduce modal noise near the cut-off wavelength when lossy splices are present (>0,5 dB).~~

Cable cut-off wavelength is more useful in describing an installed network system performance and capability, while fibre cut-off would apply to short cables or pigtails. The two cut-off wavelengths can be mapped to each other for a specific fibre type and cut-off measurement method. The customer and the supplier shall agree to the confidence level of each mapping function established (see Clause 11 for details).

6 Reference test method

Method A, cable cut-off wavelength using uncabled fibre, is the reference test method (RTM). This method shall be used to settle any disputes.

~~The apparatus for each method is described in Clause 7.~~

7 Apparatus

7.1 Light source

Provide a filtered white light source, with line width not greater than 10 nm, stable in position and intensity. The light source should be capable of operating over the wavelength range 1 000 nm to 1 600 nm for most category B fibres. An operating range of 800 nm to 1 700 nm

may be necessary for some ~~B4~~ B-655 fibres, ~~B5~~ B-656 fibres or ~~some~~ category C fibres. A scanning monochromator with a halogen bulb is one example of this kind of source.

7.2 Modulation

Modulate the light source to prevent ambient light affecting the results, and to aid signal recovery. A mechanical chopper with a reference output is a suitable arrangement.

7.3 Launch optics

Provide launch optics, such as a lens system or a multimode fibre, to overfill the test fibre over the full range of measurement wavelengths. This launch is relatively insensitive to the input end face position of the single-mode fibre and is ~~sufficient~~ able to excite the fundamental and any higher-order modes in the specimen. If using a butt splice, provide means of avoiding interference effects.

When using a multimode fibre, overfilling the reference fibre can produce an undesired ripple effect in the power-transmission spectrum. Restrict the launch sufficiently to eliminate the ripple effect. One example of restricted launch is in method A, attenuation by cut-back, of IEC 60793-1-40. Another example of restricted launch is a mandrel-wrap mode filter with sufficient (approximately 4 dB) insertion loss.

7.4 Support and positioning apparatus

Provide a means to stably support the input and output ends of the specimen for the duration of the test; vacuum chucks, magnetic chucks, or connectors may be used for this purpose. Support the fibre ends such that they can be repeatedly positioned in the launch and detection optics. When measuring λ_{cc} in method B, provide a means to suitably support the cable ends. The mechanism used to hold the fibre ends allows for fibre positioning with respect to the launch and detection optics. Holding and moving of the fibre should not cause micro-bends that affect the measurement accuracy. **3**

7.5 Deployment mandrel

7.5.1 General

~~Use a means to stably support the input and output ends of the specimen for the duration of the measurement. Support the fibre ends so that they can be repeatedly and stably positioned with respect to the launch and detection optics without introducing microbends into the specimen.~~

The fibre specimen's two ends, input and output, are mechanically held in place during the measurement. The deployment and length of the specimen, together with the support apparatus, are key elements of the measurement method, and they distinguish the types of cut-off wavelength.

Additional, alternative deployments may be used if the results obtained have been demonstrated to be empirically equivalent to the results obtained using the standard deployment, to within 10 nm, or they are greater than those achieved with the standard configurations.

7.5.2 Cable cut-off wavelength deployment, method A

Provide a means to make an 80 mm diameter loop at each end of the specimen and a loop of diameter ≥ 280 mm in the central portion. See Figure 2.

~~NOTE Two loops at one end can be substituted for one loop at each end.~~


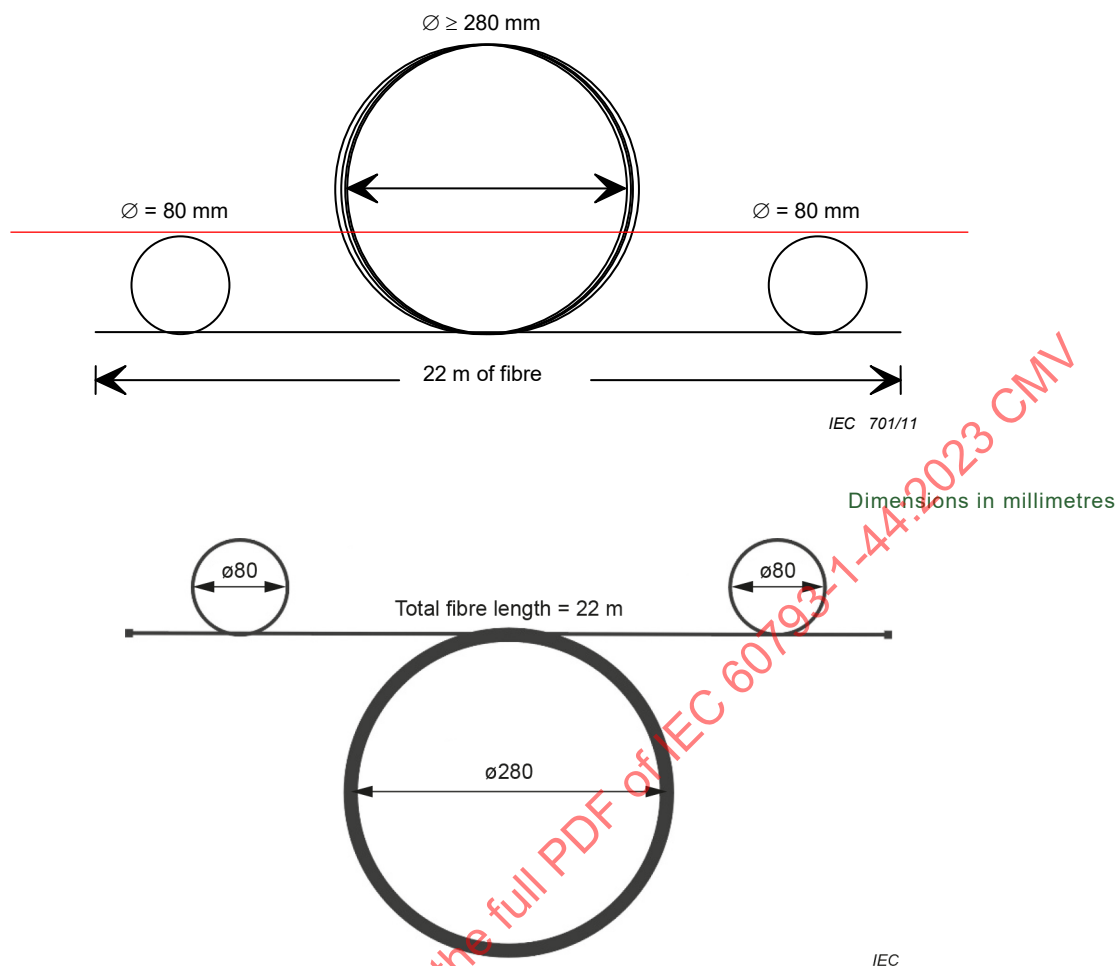


Figure 2 – Deployment configuration for cable cut-off wavelength λ_{cc} , method A

7.5.3 Cable cut-off wavelength deployment, method B

Provide a means to make an 80 mm diameter loop at each end of the specimen. See Figure 3. The cabled fibre between the two 80 mm loops has a bending diameter greater than 280 mm.

~~NOTE Two loops at one end can be substituted for one loop at each end.~~

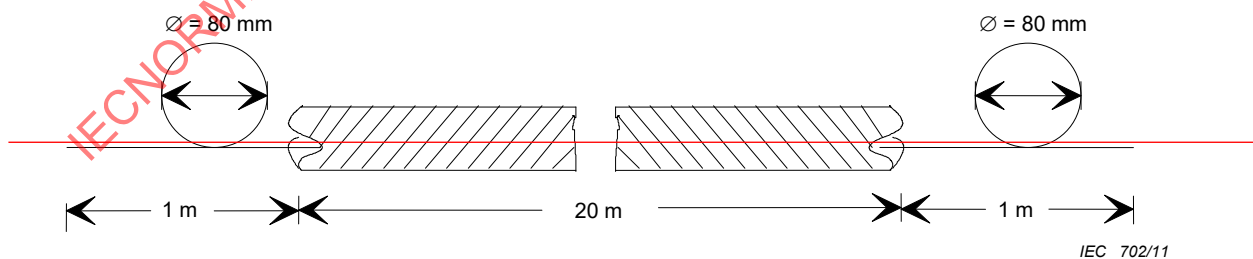

Dimensions in millimetres

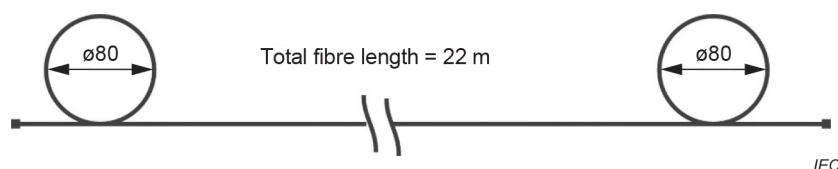


Figure 3 – Deployment configuration for cable cut-off wavelength λ_{cc} , method B

7.5.4 Fibre cut-off wavelength deployment, method C 4

~~Provide a circular mandrel as the initial fibre cut-off wavelength deployment. (See Figure 4a). A split, semicircular mandrel with a radius of 140 mm that is capable of sliding, hence able to take up slack fibre, is an alternative deployment. (See Figures 3 and 4b).~~

~~NOTE—The introduction of a minimum bend of the cable sufficient to permit connection of the two ends of the whole specimen to the measurement setup is allowed.~~


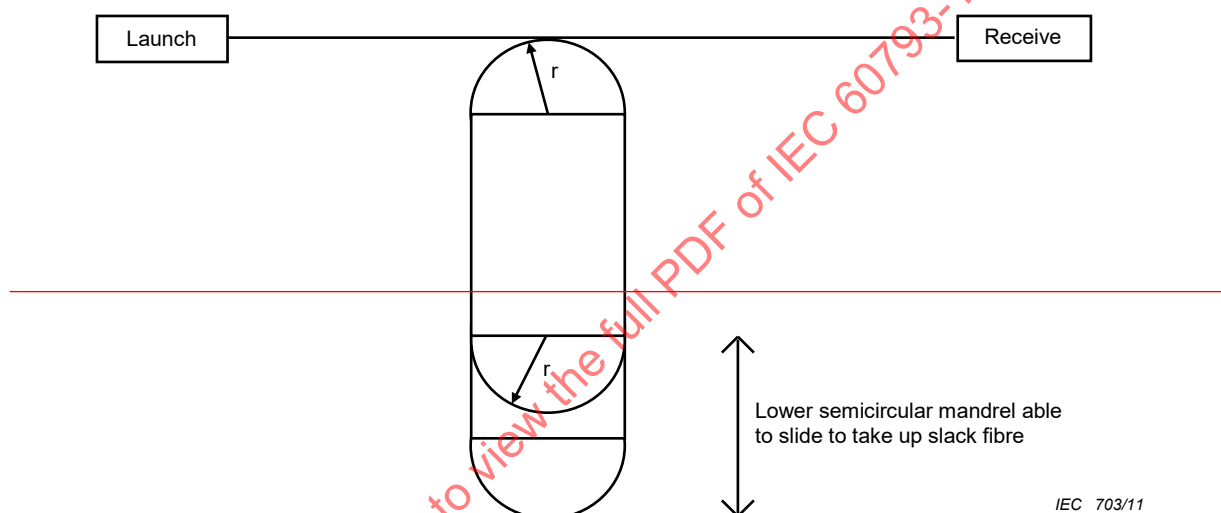


Figure 3 – Default configuration to measure λ_e

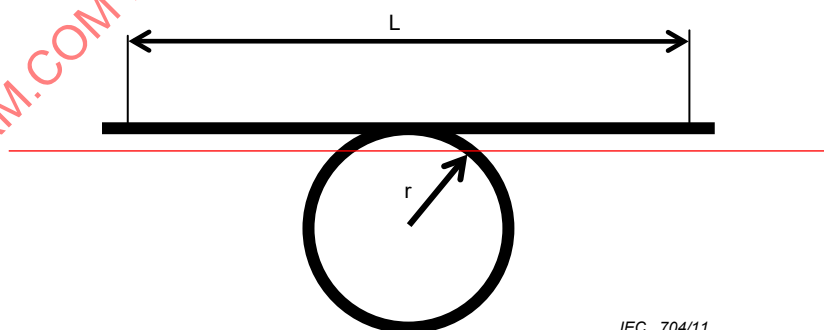


Key

$r = 140 \text{ mm}$


$L = 2 \text{ m (entire fibre length)}$

Figure 4a) — Initial deployment configuration for fibre cut-off wavelength measurement — circular mandrel

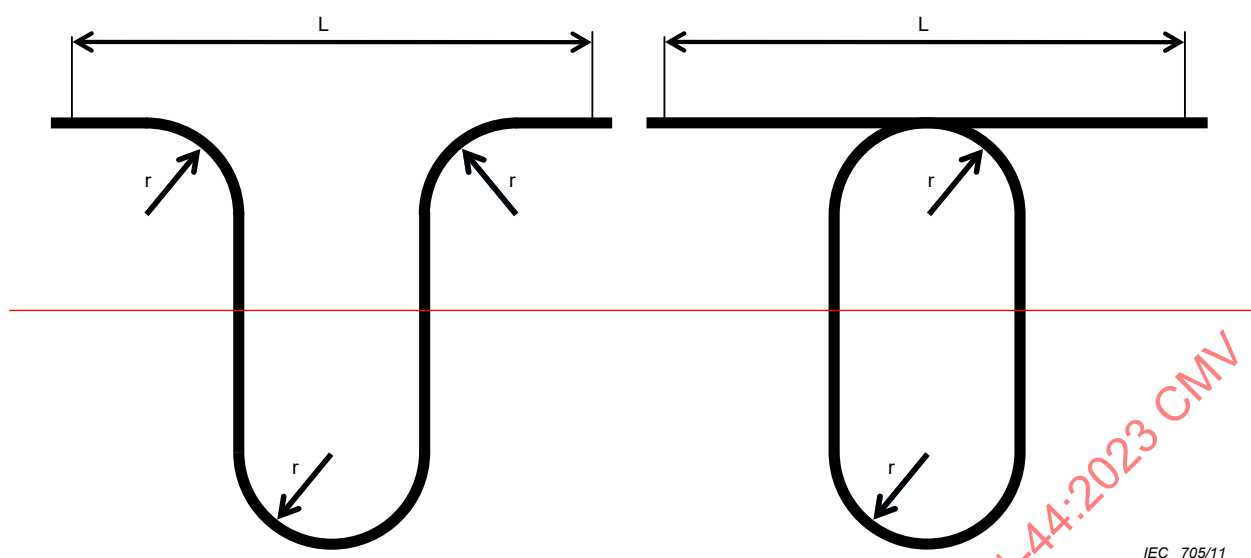**Key** $r = 140 \text{ mm}$ $L = 2 \text{ m}$ (entire fibre length)**Figure 4b) — Alternative deployment configuration for fibre cut-off wavelength measurement — split mandrel****Figure 4 — Deployment configurations for fibre cut-off measurement**

Provide means to route a fibre specimen through one complete circular loop having a diameter equal to 280 mm, see Figure 4.

Dimensions in millimetres

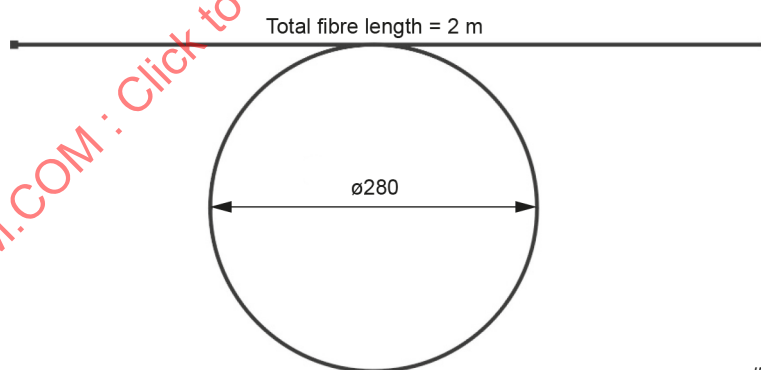

IEC

Figure 4 – Standard deployment for fibre cut-off wavelength measurement**7.6 Detection optics**

Couple all power emitted from the specimen onto the active region of the detector. As examples, an optical lens system, a butt splice with a multimode fibre pigtailed to a detector, or direct coupling may be used.

7.7 Detector assembly and signal detection electronics

Use a detector that is sensitive to the output radiation over the range of wavelengths to be measured and that is linear over the range of intensities encountered. A typical system might include a germanium or InGaAs photodiode, operating in the photo-voltaic mode, and a current-sensitive preamplifier, with synchronous detection by a lock-in amplifier. Generally, a computer is required to analyse the data.

7.8 Cladding mode stripper

Provide a means to remove cladding-mode power from the specimen. Under some circumstances, the fibre coating will perform this function; otherwise, provide methods or devices that extract cladding-mode power at the input and output ends of the specimen.

8 Sampling ~~and~~ specimens

8.1 Specimen length

Choose the specimen length according to which parameter is being measured and, if the parameter is cable cut-off wavelength, the method to be used. See the appropriate annex: Annex A or Annex B for the cable cut-off wavelength measurement or Annex C for fibre cut-off wavelength.

8.2 Specimen end face

Prepare a flat end face, orthogonal to the fibre axis, at the input and output ends of each specimen. An optical fibre cleaver is often used to achieve very flat and clean end faces.

9 Procedure

9.1 Positioning of specimen in apparatus

9.1.1 General requirements for all methods

Align the input and output ends of the specimen to the launch and detection optics. Do not change the launch and detection conditions during the course of the measurement.

Unless otherwise specified, when installing the specimen in the apparatus, and when using a cladding-mode stripper, ~~take care to~~ avoid imposing any additional fibre bends smaller than those specified in the configuration for the particular measurement being made.

9.1.2 Deployment requirements for each method

Deploy the specimen using the information in Clause 7 and the following annexes:

- cable cut-off wavelength, method A (see Annex A);
- cable cut-off wavelength, method B (see Annex B);
- fibre cut-off wavelength, method C (see Annex C).

9.2 Measurement of output power

9.2.1 Overview

Record the output power, $P_s(\lambda)$, along the wavelength range, in increments of 10 nm or less. The range shall be broad enough to encompass the expected cut-off wavelength ~~and, as outlined below, ultimately result in a curve similar to that in Figure 5 (using the bend reference technique) or Figure 6 (using the multimode reference technique).~~ The measured power is then

normalized by the reference power producing curves similar to Figure 5, bend reference and Figure 6 multimode reference.


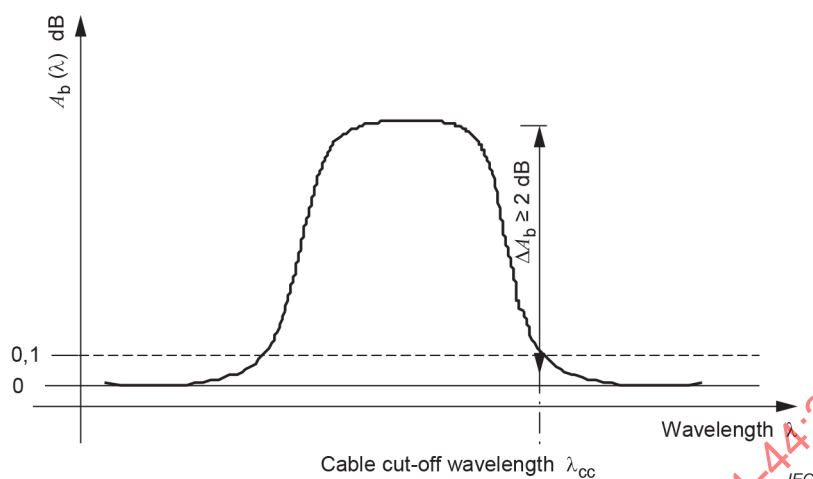


Figure 5 – Cut-off wavelength using the bend-reference technique 5

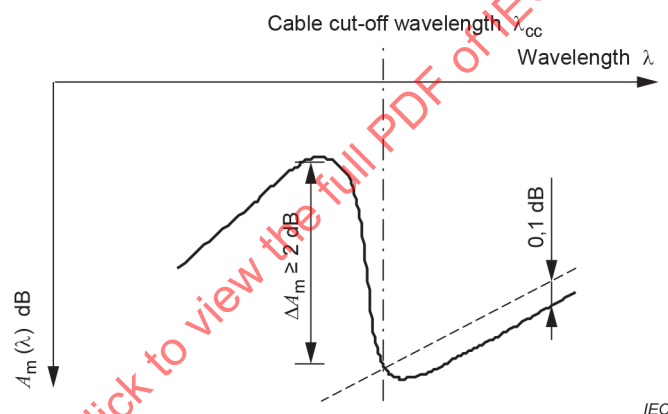

Key

$A_m(\lambda)$ – The spectral transmittance referenced to the multimode fibre (dB)

Figure 6 – Cut-off wavelength using the multimode-reference technique

9.2.2 Bend-reference technique

With input and output conditions unchanged, introduce a smaller-diameter bend between input and the output. Record the transmitted spectral power, $P_b(\lambda)$, over the same wavelength range and with the same spectral increments as in making the original measurement on the specimen.

The exact value of the smaller diameter may be determined prior to measurement; it should be small enough to attenuate the second-order mode, but not too small in order to avoid macrobending effects at higher wavelengths. A radius between 10 and 30 mm is typical for most B1.1 to B5 fibres. For some B6 fibres, the radius shall be much smaller, and this measurement technique may not be adequate for these fibres. See Note to 10.1. A diameter between 20 mm and 60 mm is typical for most B652 to B656 fibres.

For some bend insensitive fibres (category B-657), the diameter may need to be smaller, and this measurement technique may not be adequate for these fibres. Curve artifacts can persist and require the use of both techniques described in Annex D. **6**

9.2.3 Multimode-reference technique

Replace the specimen with a short (< 10 m) length of category A1(OM1-OM5) multimode fibre as a reference. Record the transmitted signal power, $P_m(\lambda)$, over the same wavelength range and with the same spectral increments as in making the original measurement on the specimen.

NOTE ~~The power using the multimode reference technique, $P_m(\lambda)$, may be stored in a computer for use in repetitive measurements on different specimens.~~

Ripples can occur in the reference spectrum $P_m(\lambda)$. Provide a means to add mode mixing which can reduce this effect; this can be done by wrapping a multimode fibre at least 5 times around a mandrel 10 mm to 20 mm in diameter. A1(OM2-OM5) type multimode fibres are preferred for this technique.

10 Calculations

10.1 Bend-reference technique

Calculate the spectral transmittance of the specimen without the ~~smaller-radius~~ small diameter bend, referenced to the condition where the smaller-radius bend is introduced:

$$A_b(\lambda) = 10 \log_{10} \frac{P_s(\lambda)}{P_b(\lambda)} \text{ in dB} \quad (1)$$

where

$A_b(\lambda)$ is the spectral transmittance referenced to the ~~smaller-radius~~ small diameter bend (dB);

$P_s(\lambda)$ is the ~~output power~~ spectral optical power through the fibre specimen;

$P_b(\lambda)$ is the ~~transmitted~~ spectral optical power through the sample with ~~the smaller-radius~~ small diameter bend ~~introduced~~.

Figure 5 shows a schematic result. The short and long wavelength edges are determined by the specimen deployed with and without the smaller-radius bend, respectively. Determine the longest wavelength at which $A_b(\lambda) = 0,1$ dB from Figure 5. This is the cut-off wavelength, provided that ΔA_b is equal to or greater than 2 dB.

If $\Delta A_b < 2$ dB, or if it is unobservable, broaden the wavelength scan and enlarge the single-mode launch conditions, or decrease the smaller-bend radius. Repeat these adjustments and the measurement procedure until $\Delta A_b > 2$ dB.

NOTE ~~For certain implementations of bend-insensitive fibres (category ~~B6~~ B-657), ΔA_b will not reach 2 dB loss, because of the very nature of these fibres. It is recommended to use the multimode-reference technique as reference scan for these fibres. See Annex D for dealing with curve artifacts that can affect the results.~~

10.2 Multimode-reference technique

Calculate the spectral transmittance of the specimen, referenced to that of the multimode fibre:

$$A_m(\lambda) = 10 \log_{10} \frac{P_s(\lambda)}{P_m(\lambda)} \quad (2)$$

where

$A_m(\lambda)$ is the spectral transmittance referenced to the multimode fibre (dB);

$P_s(\lambda)$ is the ~~output~~ spectral optical power through the specimen;

$P_m(\lambda)$ is the ~~transmitted signal~~ spectral optical power through the multimode reference fibre.

Figure 6 shows a schematic result.

Fit a straight line to the long-wavelength portion of $A_m(\lambda)$, displacing it upward by 0,1 dB, as shown by the dashed line in Figure 6. Determine the longest wavelength at which this displaced line intersects with $A_m(\lambda)$. This is the cut-off wavelength, provided that ΔA_m is equal to or greater than 2 dB. Between measured data points, $A_m(\lambda)$ is defined by linear interpolation.

If $\Delta A_m < 2$ dB, or if it is unobservable, broaden the wavelength scan and enlarge the single-mode launch conditions. Repeat these adjustments and the measurement procedure until $\Delta A_m > 2$ dB, and until the long-wavelength tail is of adequate length to be fitted by a straight line.

NOTE 1 When using the multimode-reference technique, fibres with high cut-off wavelengths, when combined with reference fibres with high water peaks, can have erroneous values reported as cut-off wavelength.

NOTE 2 For certain implementations of bend-insensitive fibres (category ~~B6~~ B-657), the bend-reference technique is not the optimal technique as reference scan. For these fibres, the multimode-reference technique is recommended. See Annex D for dealing with curve artifacts that can affect the results.

~~10.3 Curve-fitting technique for improved precision (optional)~~

~~10.3.1 General~~

~~In the absence of spurious humps or excessive noise in the upper wavelength region, accurate values for cut-off wavelength can be determined without curve fitting.~~

~~If curve fitting is considered necessary for improving precision, there are six steps. The first two steps define the LP₀₁ region, or upper wavelength region. The next two steps define the transition region, where LP₁₁ attenuation begins to increase. The fifth step characterizes this region according to a theoretical model. The last step computes the cut-off wavelength from the characterization parameters.~~

~~This analysis is applicable for λ_c and λ_{cc} measured by all methods, using either the bend-reference technique or the multimode-reference technique.~~

~~The term $\alpha(\lambda)$ represents either $A_b(\lambda)$ or $A_m(\lambda)$.~~

~~10.3.2 Step 1, define the upper wavelength region~~

~~10.3.2.1 Using the bend-reference technique~~

~~One method to identify the lower wavelength of the upper wavelength region is to find the maximum attenuation wavelength. For wavelengths greater than the maximum attenuation~~

wavelength, the lower wavelength of the region is the wavelength at which the following function is a minimum: $\alpha(\lambda) - 8 + 8\lambda$, with λ in μm .

The upper wavelength of the upper wavelength region is the lowest wavelength value of the upper wavelength region plus 150 nm.

10.3.2.2 Using the multimode reference technique

One method to identify the lower wavelength of the upper wavelength region is to find the maximum slope wavelength, the wavelength at which the first difference, $\alpha(\lambda) - \alpha(\lambda + 10 \text{ nm})$, is largest. For wavelengths greater than the maximum slope wavelength, the lower wavelength of the region is the wavelength at which the attenuation is a minimum.

10.3.3 Step 2, characterize the attenuation curve

Characterize the attenuation curve, $\alpha(\lambda)$, of the upper wavelength region as a linear equation in wavelength, λ :

$$\alpha(\lambda) = A_u + B_u (\lambda \text{ in } \mu\text{m}) \quad (3)$$

where

$\alpha(\lambda)$ is the attenuation curve;

A_u and B_u are median attenuation values (dB).

a) Using the bend reference technique

Set B_u to 0 and A_u to the median attenuation values in the upper wavelength region. Then define a function, $a(\lambda)$, to represent the difference between the attenuation and the line fit to the upper wavelength region:

$$a(\lambda) = \alpha(\lambda) - A_u - B_u \lambda \quad (\lambda \text{ in } \mu\text{m}) \quad (4)$$

where

$a(\lambda)$ is the function representing the difference between attenuation and line fit (dB);

A_u and B_u are as defined for Equation (3).

b) Using the multimode reference technique

Fit the attenuation values using a special technique to avoid the effects of positive humps:

a) Find A_u and B_u by simplex regression so that the sum of the absolute values of error is minimum, and such that all errors are non-negative.

b) Determine the median of the errors and add the value to A_u .

Then define a function, $a(\lambda)$, to represent the difference between the attenuation and the line fit to the upper wavelength region, using Equation (4).

10.3.4 Step 3, determine the upper wavelength of the transition region

One method to identify the lower wavelength of the upper wavelength region is by starting at the upper wavelength of the upper wavelength region, from step 1, the upper wavelength of the transition region is: 10 nm plus the maximum wavelength at which $a(\lambda)$ is greater than 0,1 dB.

10.3.5 Step 4, determine the lower wavelength of the transition region

There are various ways to determine the lower wavelength of the transition region. Here are two examples:

- Starting with the upper wavelength of the transition region from step 3, find the wavelength at which $a(\lambda)$ has a local maximum, and the difference between this maximum and the next local minimum (at larger λ) is maximum.
- Find the largest wavelength, below the upper wavelength of the transition region, such that $a(\lambda)$ is greater than 2 dB and:
 - There is a local maximum for $a(\lambda)$, or
 - There is a local maximum for $a(\lambda) - a(\lambda + 10 \text{ nm})$.

10.3.6 Step 5, characterize the transition region with the theoretical model

The model is a linear regression of a transformation:

$$Y(\lambda) = 10 \log_{10} \left[\frac{10}{C} \log_{10} \left(\frac{10^{\frac{a(\lambda)}{10}} - 1}{\rho} \right) \right] \quad (5)$$

where

$Y(\lambda)$ is the linear regression of transformation;

$a(\lambda)$ is from equation (4);

$$C = 10 \log_{10} \left[\frac{\rho}{(10^{0.01} - 1)} \right] \quad (6)$$

and, unless otherwise specified, $\rho = 2$.

Fit the transform, $Y(\lambda)$, to the following linear model, using data from the transition region:

$$A_t + B_t \lambda = Y(\lambda) \quad (7)$$

In order to limit the effect of positive humps, the regression may be done with constraints on errors so that negative errors in the attenuation curve will not exceed the negative errors found in the characterization of the upper wavelength region. This fitting technique may be accomplished with simplex methods.

Then let $E = \min[a(\lambda)]$, for λ in the upper wavelength region.

For the transition region, find the values of A_t and B_t from equation (7) so that the sum of the absolute values of error is minimized, and so that no error is less than $-v(\lambda)$, with $v(\lambda)$ derived from $w(\lambda)$ and $z(\lambda)$ and defined as:

$$w(\lambda) = 10^{-\frac{a(\lambda) - E}{10}} \quad (8)$$

$$z(\lambda) = 10 \log_{10} \left[\frac{10}{C} \log_{10} \left(\frac{w(\lambda) - 1}{\rho} \right) \right] \quad (9)$$

where $v(\lambda)$, $w(\lambda)$, and $z(\lambda)$ represent intermediate calculations used to simplify the overall expression.

$$\text{Then } v(\lambda) = Y(\lambda) - z(\lambda). \quad (10)$$

10.3.7 Step 6, compute the cut-off wavelength, λ_c

Evaluate the slope of the transition region and compute the cut-off wavelength.

If B_t is greater than a small negative value (for example, -1 to $-0,1$), reduce the upper wavelength of the transition region by 10 nm and repeat step 5. Otherwise, compute λ_c as:

$$\lambda_c = -\frac{A_t}{B_t} \quad (11)$$

where

λ_c is the fibre cut-off wavelength (μm);

A_t and B_t are from equation (7).

NOTE Calculate cable cut-off wavelength, λ_{cc} , in the same manner as for fibre cut-off wavelength, λ_c , in step 6 above. Simply replace λ_c with λ_{cc} in Equation (11), as appropriate.

11 Mapping functions

A mapping function is a formula by which the measured results of one type of cut-off wavelength are used to predict the results that one would obtain from another type. Figure 7 illustrates the cut-off wavelength difference between the fibre cut-off method C and the cable cut-off method A for a specific fibre type. **7**

An empirical mapping function is specific to a particular fibre type and ~~design~~ method. Generate mapping functions by doing an experiment in which ~~samples of fibre are chosen to represent the spectrum of cut-off wavelength values for the fibre type, then measure the values using the two methods to be mapped~~ a variety of fibre specimens between the two fibre deployment methods are sampled. A linear regression of the respective values will often produce a satisfactory mapping function. When establishing criteria for fibre selection, residual errors in the regression shall be taken into account.

~~The customer and the supplier shall agree to the confidence level of each mapping function established.~~

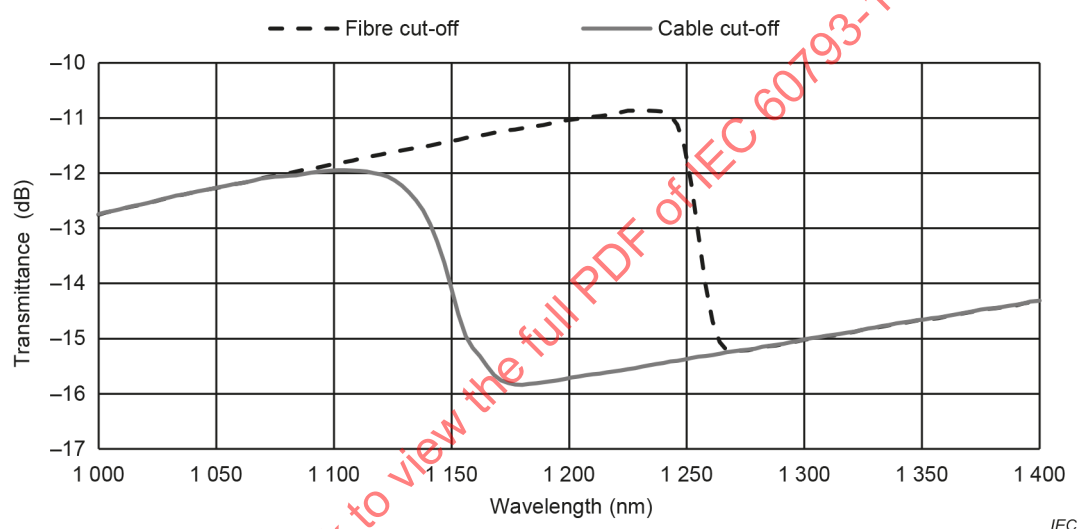


Figure 7 – Cable cut-off vs fibre cut-off for a specific fibre (multimode reference)

12 Results

12.1 Report the following information with each measurement:

- date and title of measurement;
- identification of specimen;
- measurement results.

12.2 The following information shall be available upon request:

- if measuring cable cut-off wavelength, the method used: A or B;
- length of specimen;
- reference technique used (bend or multimode);
- type of multimode fibre used (if using multimode-reference technique);
- description of all key equipment used: light source, launch optics, cladding-mode stripper, specimen-support mechanisms, and detection optics;

- description of monochromator (spectral scanning range, spectral width, and incremental steps);
- description of detection and recording techniques;
- description of deployment configuration used;
- typical plot of the spectral curve, $A_b(\lambda)$ or $A_m(\lambda)$;
- date and certificate of latest calibration of measurement equipment.

13 Specification information

The detail specification shall specify the following information:

- type of fibre or cable to be measured;
- failure or acceptance criteria;
- information to be reported;
- any deviations to the procedure that apply.

IECNORM.COM : Click to view the full PDF of IEC 60793-1-44:2023 CMV

Annex A (normative)

Requirements specific to method A – Cable cut-off wavelength, λ_{cc} , using uncabled fibre

A.1 Specimen length

Use a $22 \text{ m} \pm 1 \text{ m}$ total length of (uncabled) optical fibre.


A.2 Procedure – Position specimen on deployment mandrel

~~As shown in Figure 1, coil the middle 20 m of the fibre specimen into a loop with a minimum radius of 140 mm. In order to conservatively simulate cabling effects. To simulate the effects of splice organizers, apply one loop of 80 mm diameter to each 1 m end of the fibre length or two loops of 80 mm diameter to one end.~~

In order to conservatively simulate cabling effects, the specimen has a central coil 20 m long with a minimum diameter of 280 mm (see Figure 2). The 20 m fibre coil has a minimum diameter of 280 mm and should be loosely coiled with minimal stress. The remaining fibre is used to create two 1 m long ends. This specimen is then placed in front of the measurement instrument where an 80 mm diameter loop is applied to each end. The 80 mm loops simulate the effects of a splice organizer. Figure A.1 shows an alternative deployment method for cable cut-off. Alternative to placing loop at each end, two 80 mm loops can be placed at one end.

Since λ_{cc} ~~is specified as~~ represents a maximum cut-off value, this configuration is sufficient to ensure specification compliance, because any further effects of cabling, installation, and deployment can only reduce further the cable cut-off wavelength value.

Dimensions in millimetres

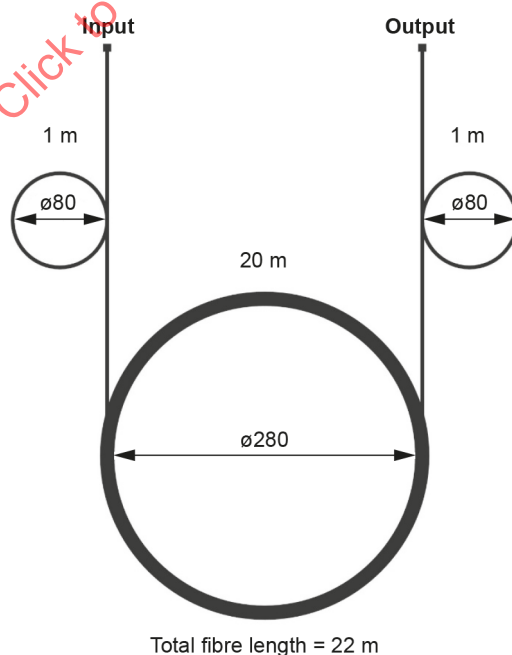

IEC

Figure A.1 – Alternative cable cut-off deployment

Annex B (normative)

Requirements specific to method B – Cable cut-off wavelength, λ_{cc} , using cabled fibre

B.1 Specimen length

Use a $22\text{ m} \pm 1\text{ m}$ total length of optical cable, with a 1 m length of decabled fibre at each end.

B.2 Procedure – Position specimen on deployment mandrel

Expose 1 m of cabled fibre from each end, and deploy the specimen as shown in Figure 3. The middle 20 m of the jacketed cable shall be substantially straight **having any bend greater than 280 mm** so that the deployment does not have a significant effect on the subsequent measurement results. To simulate the effects of splice organizers, apply one loop of 80 mm diameter to each 1 m end of the decabled fibre length or two loops of 80 mm diameter to one end of the decabled fibre. **The cabled ends should be secured as to not move during measurement.**

NOTE For short cables, for example a pigtail with a length shorter (and possibly a bending radius larger) than described in this method, it is possible the cable introduces modal noise near the cut-off wavelength when lossy splices are present ($> 0,5\text{ dB}$).

IECNORM.COM : Click to view the full PDF of IEC 60793-1-44:2023 CMV

Annex C (normative)

Requirements specific to method C – Fibre cut-off wavelength, λ_c

C.1 Specimen length


Use an optical fibre with a total length of $2\text{ m} \pm 0,2\text{ m}$.

C.2 Procedure – Position specimen on deployment mandrel

Bend the specimen into a loosely constrained circular loop ~~that is one complete turn of a circle of 140 mm radius~~ having a diameter of 280 mm (see Figure 4).

Alternatively, the loop placed in the fibre may consist of two arcs (each of 180°) of ~~140~~ 280 mm ~~radius~~ diameter connected by tangents. This set-up is shown in ~~Figure 3~~ Figure C.1, where the lower semi-circular mandrel is allowed to move to take up any slack fibre without requiring the movement of any of the optics, or placing any significant tension on the rest of the fibre ~~sample specimen~~. The remaining fibre shall be substantially free of external stresses 8. ~~While some bends of larger radii are permissible, they shall not significantly affect the measurement result.~~

Dimensions in millimetres

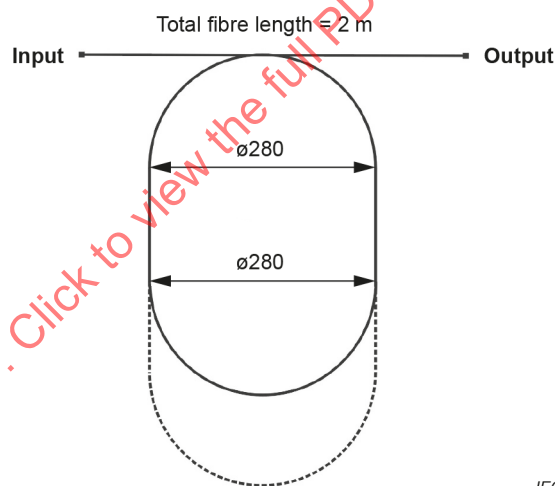

IEC

Figure C.1 – Alternative fibre cut-off deployment – Sliding semi-circle

There are a variety of alternative deployments; Figure C.2 and Figure C.3 depict other variations. Alternative deployments may have larger bends greater than 280 mm as long as they do not significantly affect the measurement result. Alternate deployment methods are compared to the deviation from the standard method and should not exceed 10 nm. When evaluating the deviation accuracy, one should also measure the deviation of deployment, meaning the variation of the measurement when the same fibre is redeployed.

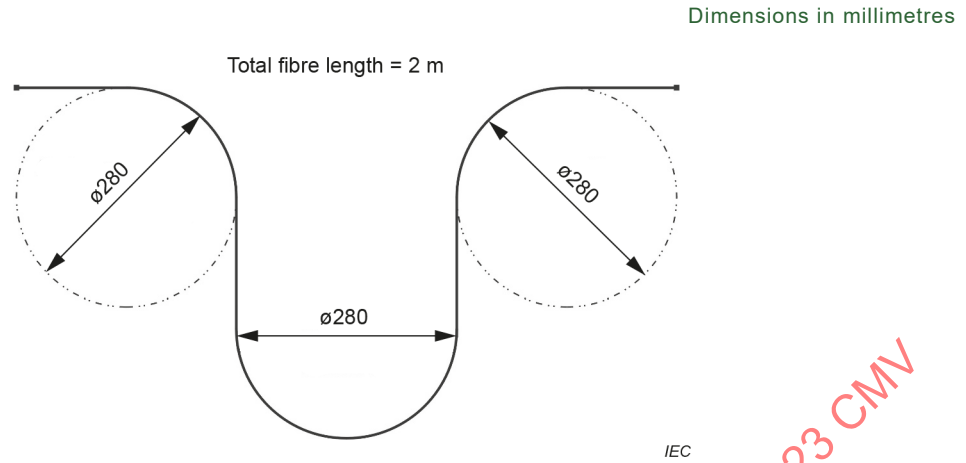


Figure C.2 – Alternative fibre cut-off deployment – Multi-bend

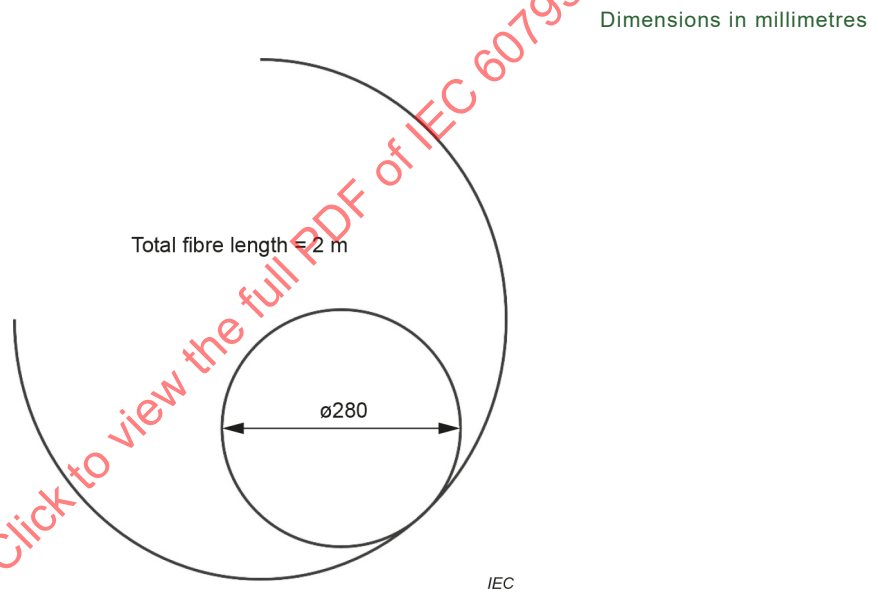


Figure C.3 – Alternative fibre cut-off deployment – Large curve

Annex D (informative)

Cut-off curve artifacts

D.1 Description of curve artifacts

Sometimes, the transition between LP_{11} to LP_{01} is not smooth. Curve artifacts can appear as small humps located around the transition area. The origin of these humps is related to modes that are not associated with the axial modes propagating in the core/cladding wave guide. These curve humps can produce errors when using standard measurement practices. Figure D.1 shows a cut-off curve where a modal hump is large enough to trigger the 0,1 dB threshold of the linear fit resulting in a cut-off wavelength calculation that is too large.

To reduce the effects of these modal humps, two methods have been proposed:

- applying advance numerical curve fitting techniques that filter the humps;
- slightly modifying the fibre deployment to attenuate the modes.

For both techniques, the standard cut-off curve measurements should serve as a guide in evaluating the accuracy of the method.

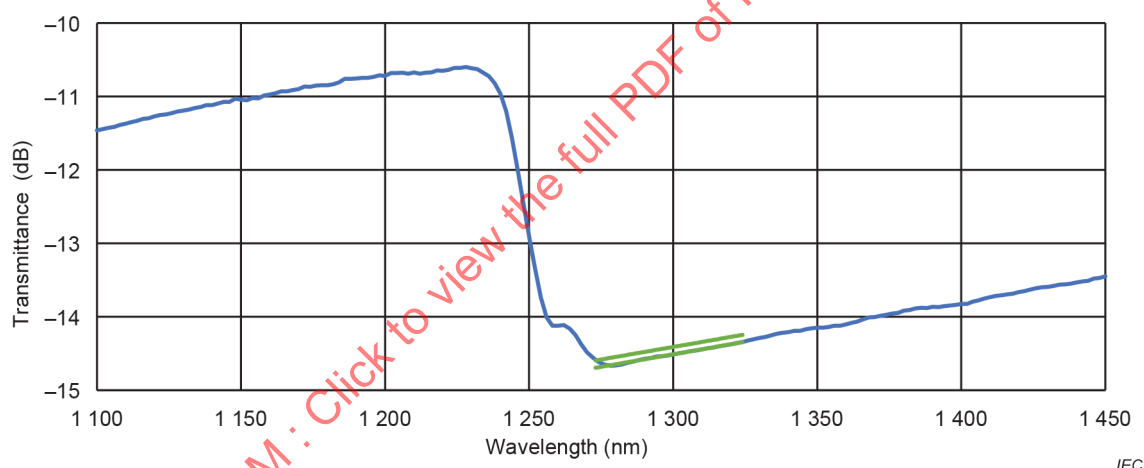


Figure D.1 – Cut-off curve with linear fit error (multimode reference)

D.2 Curve-fitting technique for artifact filtering

D.2.1 Overview

The general concept is to fit two curves to the spectral transmittance and use their intersection to define the cut-off wavelength. Figure D.2 shows a curve fitting result that filters a hump measured by a fibre cut-off multimode reference method. When using curve fitting, one shall observe the fit overlay on the cut-off curve to ensure that the fit was properly applied. Sometimes the curve fit can be influenced by the location of the humps and provide results that do not represent the loss of the LP_{11} mode.

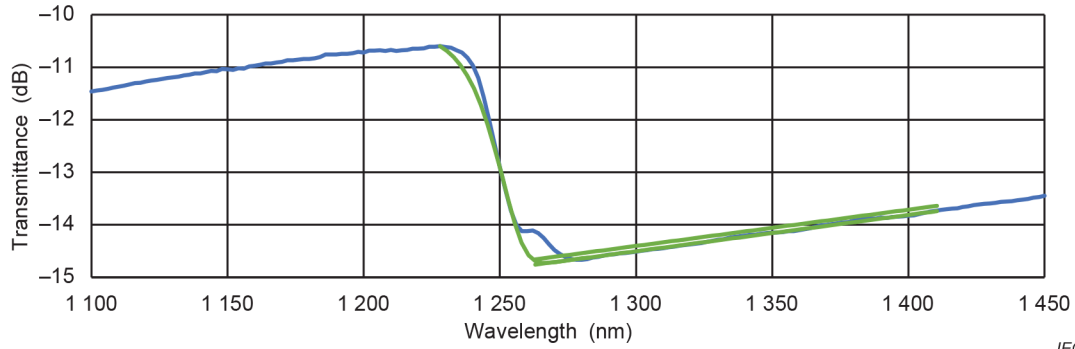


Figure D.2 – Fibre cut-off curve fitting technique (multimode reference)

D.2.2 General

If curve fitting is considered necessary for improving precision, then one method is described below. The method describes a seven step process for smoothing data through numerical filtering. The steps 1 to 3 define the LP_{01} region, or upper-wavelength region. Steps 4 to 5 define the transition region, where LP_{11} attenuation begins to increase. Step 6 characterizes this region according to a theoretical model. Step 7 computes the cut-off wavelength from the characterization parameters. **9**

This analysis is applicable for λ_c and λ_{cc} measured using either the bend-reference technique or the multimode-reference technique. The term $A(\lambda)$ represents either spectral transmittance $A_b(\lambda)$ or $A_m(\lambda)$. Figure D.3 illustrates the regions' location and the curve fit applied to each of them.

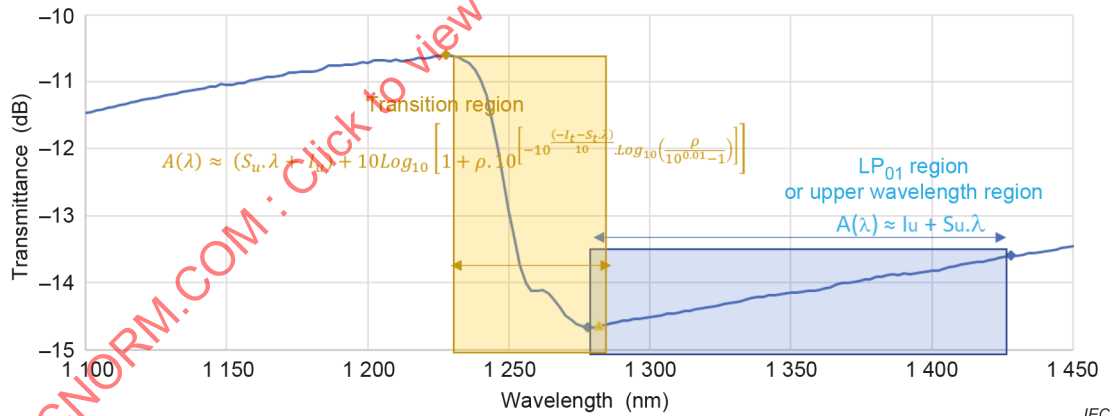


Figure D.3 – Curve fitting regions

D.2.3 Step 1: define the upper wavelength region

The upper wavelength region starts at a wavelength ("start wavelength", λ_{start}^u) and ends at a higher wavelength ("end wavelength", λ_{end}^u).

- Start wavelength
 - 1) Bend reference technique

One method is to find the wavelength at which the spectral transmittance is maximum.

For wavelengths greater than this wavelength, the start wavelength is the wavelength at which the function $A(\lambda) - 8 + 8\lambda$, with λ in μm , is minimum.
 - 2) Multimode reference technique

One method is to find the wavelength at which the function $A(\lambda) - A(\lambda + 10 \text{ nm})$ is maximum.

For wavelengths greater than this wavelength, the start wavelength is the wavelength at which $A(\lambda)$ is minimum.
- End wavelength

The end wavelength, λ_{end}^u , is the start wavelength, λ_{start}^u , plus 150 nm.

D.2.4 Step 2: characterize the spectral transmittance

Characterize the spectral transmittance, $A(\lambda)$, of the upper wavelength region as a linear equation in wavelength, λ :

$$A(\lambda) \approx I_u + S_u \cdot \lambda \quad (\text{D.1})$$

where

$A(\lambda)$ is the spectral transmittance;

I_u and S_u are the intercept and the slope of the linear equation respecting the description below.

a) Using the bend-reference technique

Set I_u to the median transmittance value of the upper wavelength region.

Set S_u to 0.

b) Using the multimode-reference technique

Find I_u and S_u by simplex regression so that the sum of the absolute values of error is minimum, and such that all errors are non-negative.

Determine the median of the errors and add the value to I_u .

D.2.5 Step 3: calculate the deviation of the spectral transmittance from the linear fit

Define a function, $d(\lambda)$, to represent the difference between the transmittance and the linear fit of the upper wavelength region, using Formula (D.2).

$$d(\lambda) = A(\lambda) - I_u - S_u \lambda \quad (\text{D.2})$$

where

$d(\lambda)$ is the function representing the difference between transmittance and linear fit (dB);

$A(\lambda)$, I_u and S_u are as defined in Formula (D.1).

D.2.6 Step 4: determine the end wavelength of the transition region

The transition region starts at a wavelength ("start wavelength", λ_{start}^t) and ends at a higher wavelength ("end wavelength", λ_{end}^t).

One method to identify the end wavelength λ_{end}^t is by adding 10 nm to the maximum wavelength at which the function $d(\lambda)$ is greater than 0,1 dB.

D.2.7 Step 5: determine the start wavelength of the transition region

There are various ways to determine the start wavelength λ_{start}^t . Here are two examples.

- a) Starting with the end wavelength λ_{end}^t from step 4, find the wavelength at which $d(\lambda)$ has a local maximum, and the difference between this maximum and the next local minimum (at larger λ) is maximum.
- b) Find the largest wavelength, below the end wavelength λ_{end}^t , such that $d(\lambda)$ is greater than 2 dB and:
 - there is a local maximum for $d(\lambda)$, or
 - there is a local maximum for $d(\lambda) - d(\lambda + 10 \text{ nm})$.

D.2.8 Step 6: characterize the transition region with the theoretical model

The model is a linear regression of a transformation:

$$Y(\lambda) = 10 \log_{10} \left[-\frac{10}{C} \cdot \log_{10} \left(\frac{10^{\frac{d(\lambda)}{10}} - 1}{\rho} \right) \right] \quad (\text{D.3})$$

where

$Y(\lambda)$ is the transformation function.

C is defined by Formula (D.4):

$$C = 10 \cdot \log_{10} \left[\frac{\rho}{10^{0,01} - 1} \right] \quad (\text{D.4})$$

where

$\rho = 2$, unless otherwise specified.

$d(\lambda)$ is defined in Formula (D.2) and used for wavelengths in the transition region.

Fit the transformation function, $Y(\lambda)$, to a linear model, using data from the transition region:

$$Y(\lambda) \approx -I_t - S_t \cdot \lambda \quad (\text{D.5})$$

To limit the effect of positive humps, the regression may be done with constraints on errors so that negative errors in the spectral transmittance will not exceed the negative errors found in the characterization of the upper wavelength region. This fitting technique may be accomplished with simplex methods.

Let E be the minimum value of $d(\lambda)$, for λ in the upper wavelength region.

For the transition region, find the values of I_t and S_t from Formula (D.5) so that the sum of the absolute values of error is minimized, and so that no error is less than $-v(\lambda)$, with $v(\lambda)$ defined along with $w(\lambda)$ and $z(\lambda)$ in Formula (D.6), Formula (D.7) and Formula (D.8).

$$w(\lambda) = 10^{\frac{d(\lambda) - E}{10}} \quad (\text{D.6})$$

$$z(\lambda) = 10 \cdot \log_{10} \left[-\frac{10}{C} \cdot \log_{10} \left(\frac{w(\lambda) - 1}{\rho} \right) \right] \quad (\text{D.7})$$

$$v(\lambda) = Y(\lambda) - z(\lambda) \quad (\text{D.8})$$

$v(\lambda)$, $w(\lambda)$, and $z(\lambda)$ represent intermediate calculations used to simplify the overall expression.

D.2.9 Step 7: compute the cut-off wavelength, λ_c

Evaluate the slope of the transition region and compute the cut-off wavelength.

If S_t is greater than a small negative value (for example, -1 to $-0,1$), reduce the upper wavelength of the transition region by 10 nm and repeat step 6. Otherwise, compute λ_c as:

$$\lambda_c = -\frac{I_t}{S_t} \quad (\text{D.9})$$

where

λ_c is the fibre cut-off wavelength;

I_t and S_t are from Formula (D.5).

NOTE Calculate cable cut-off wavelength, λ_{cc} , in the same manner as for fibre cut-off wavelength, λ_c , in step 7 above. Simply replace λ_c with λ_{cc} in Formula (D.9), as appropriate.

D.3 Fibre deployment method for artifact attenuation

The modal humps can vary in location and frequency depending on the fibre type and deployment. Figure D.4 and Figure D.5 show cut-off curves with multiple artifacts for both the multimode reference technique and the bend reference technique. It has been observed that, when bends greater than 280 mm diameter are introduced to the standard fibre deployment, as in Figure D.6, the modal humps decrease in magnitude. The slight birefringence introduced into the fibre attenuates the non-axial modes. If the bends are slight enough, the fibre cut-off transition shift is less than 10 nm from the standard deployment. Figure D.7 shows the comparison of two cut-off curves with and without large bends. The deployment method is then used with the standard linear fit having a 0,1 dB threshold. The effect of the large diameter bends should be evaluated for each fibre type.

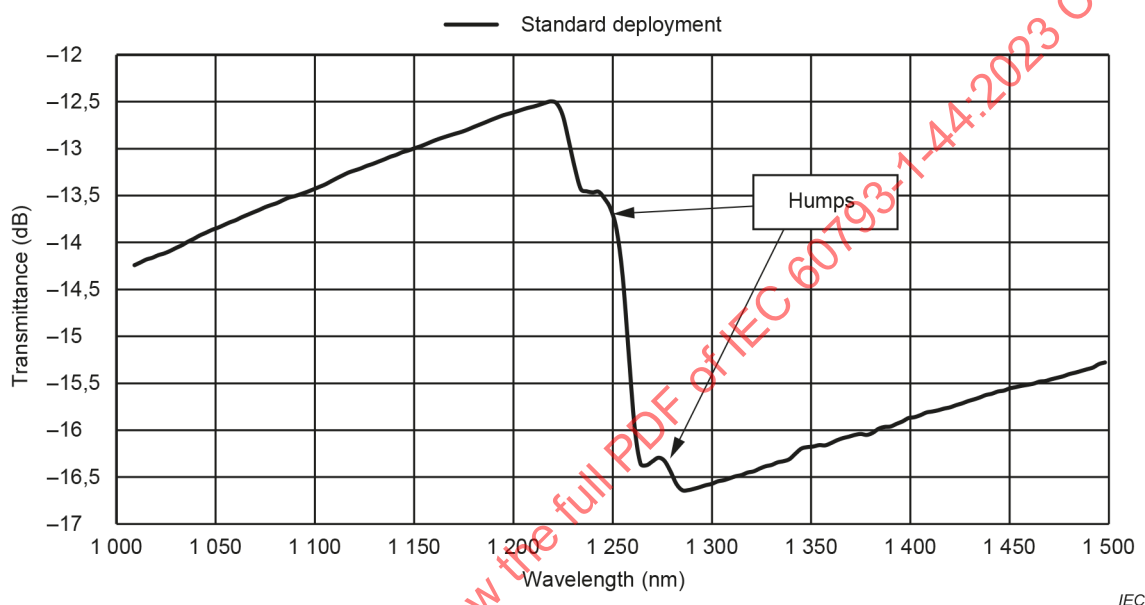


Figure D.4 – Fibre cut-off curve with artifacts (multimode reference)

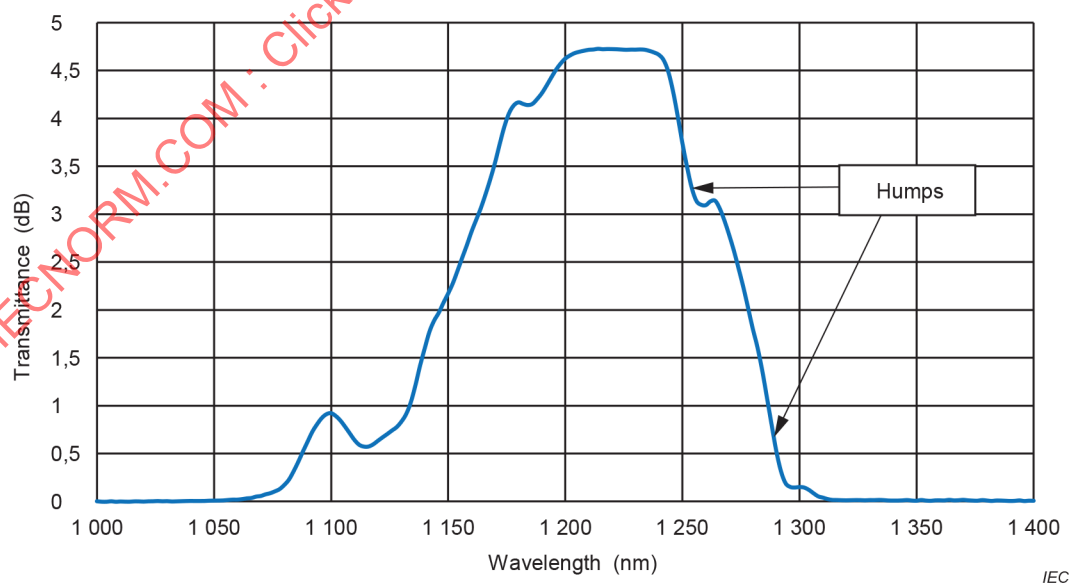


Figure D.5 – Fibre cut-off curve with artifacts (bend reference)

Dimensions in millimetres

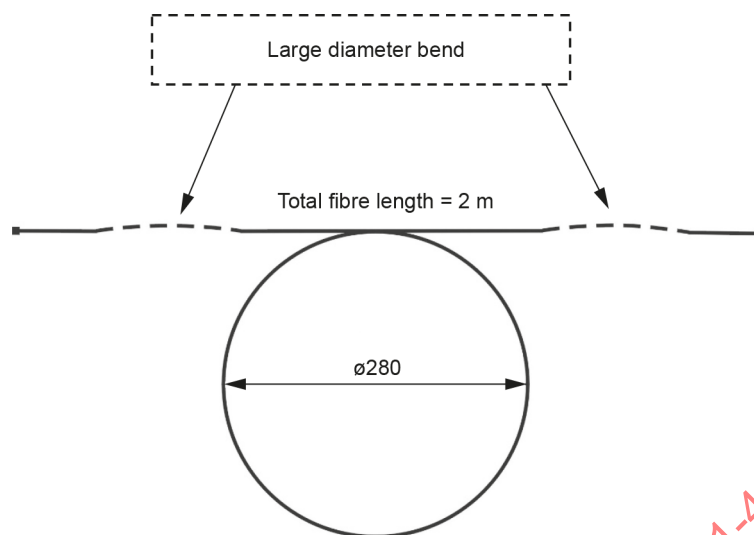


Figure D.6 – Fibre deployment with large diameter bends for mode filtering

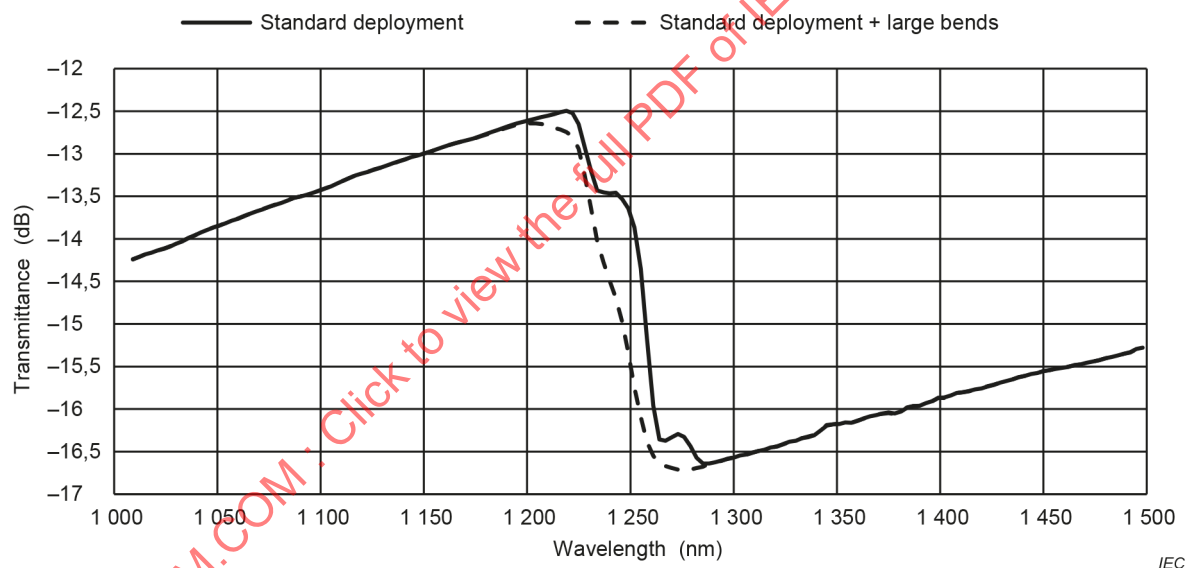


Figure D.7 – Fibre cut-off curve with mode attenuation (multimode reference)

Bibliography

IEC 60793-1-40, *Optical fibres – Part 1-40: Attenuation measurement methods*

IEC 60793-2-10, *Optical fibres – Part 2-10: Product specifications – Sectional specification for category A1 multimode fibres*


IEC 60793-2-50, *Optical fibres cables – Part 2-50: ~~Indoor cables – Family specification for simplex and duplex cables for use in terminated cable assemblies~~ Product specifications – Sectional specification for class B single-mode fibres*

IEC 60793-2-60, *Optical fibres – Part 2-60: Product specifications – Sectional specification for category C single-mode intraconnection fibres*

IECNORM.COM : Click to view the full PDF of IEC 60793-1-44:2023 CMV

List of comments


- 1 This is the point the optical waveguide geometry and index propagate only the fundamental mode. The figure below depicts this concept in a graphical form.

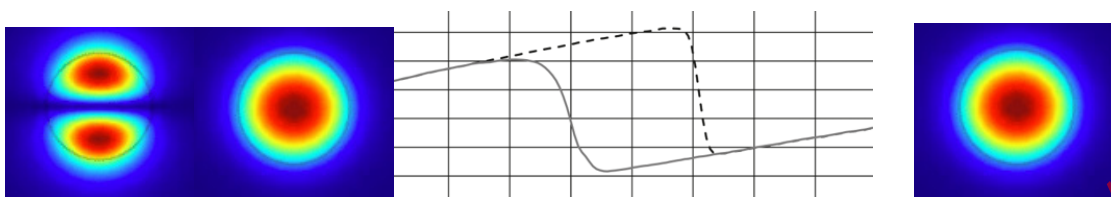

- 2 In this flow chart the cut-off analysis refers to using the transmittance of the fibre sample to determine discrete changes in the transmitted optical power. The point at which the power of the LP11 mode is lost and only the LP01 mode is propagating in the wave guide. The transmittance data is normalized to light source variances by using a reference scan over the same wavelength span.
- 3 Testing for the influence of microbending can be accomplished by doing a transmittance measurement where the data is normalized by the nonclamped state. This can simply be a bend reference measurement where the bent state is replaced with an unbent state.
- 4 In practice a variety of deployment methods have been used for fibre cut-off. A fibre deployment method can be verified by comparing the results of the cut-off measurement of the test configuration.

The standard deployment being shown in figure 4 where a single 289 mm loop has to straight ends and a total length of 2 m.

- 5 The bend reference should produce a region that is flat prior to the cut-off point. If this does not occur then the bend diameter needs to be smaller.

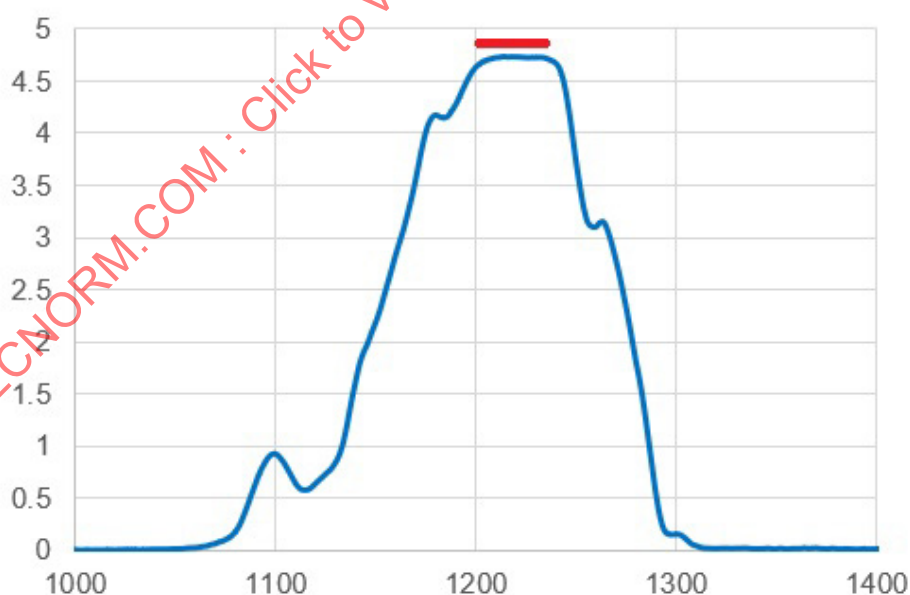

- 6 For the standard bend insensitive fibre deployment modal artifacts are observed. These non-axial modes can be attenuated by applying a large bend. The attenuated curve features are then filtered by using the curve fitting technique.

This process for the multimode technique is depicted in the 3 graphs below. A large bend is used to filter the modal artifacts. The curve fitting is then applied to this modal filtered transmittance curve. Note the plot provided is for the multimode-reference technique.

Stress free
deployment

$$\lambda_c = 1262.8 \text{ nm}$$


Bend Insensitive Fiber



Large bend
mode filtering

$$\lambda_c = 1260.3 \text{ nm}$$


Bend Insensitive Fiber

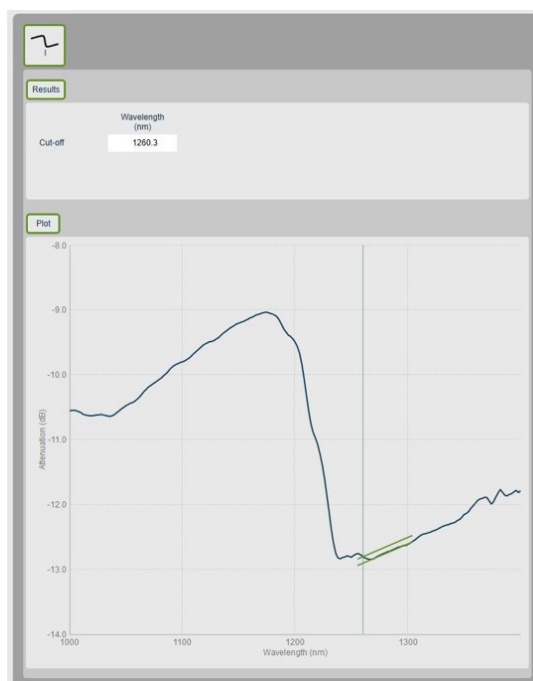

Mode filtering and Curve fitting

$$\lambda_c = 1244.1 \text{ nm}$$

Bend Insensitive Fiber

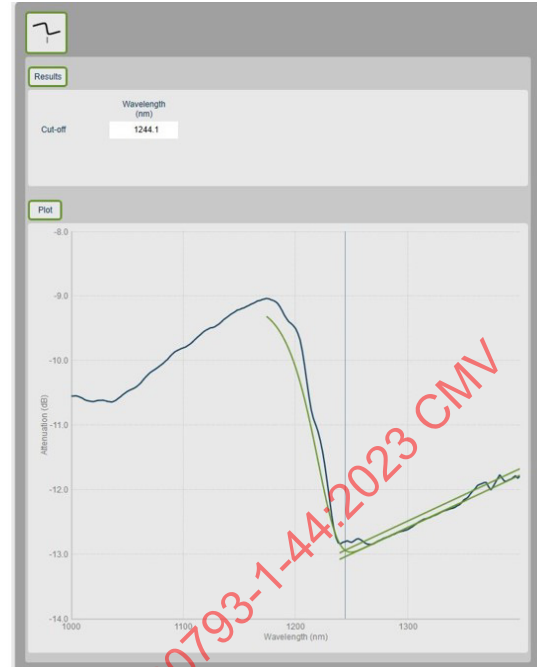

- 7 A mapping function allows the easier to deploy fibre cut-off method to be used to predict the cable cut-off transition point.
- 8 When a fibre is deployed or laid out, care should be taken not to twist or induce small bends in the fibre. Ideally the fibre can be laid into position without clamping devices.
- 9 The origins of the specific curve fitting equation comes from analyzing and modeling a series of empirical transmittance data generated with standard telecom single mode fibre.

IECNORM.COM : Click to view the full PDF of IEC 60793-1-44:2023 CMV

INTERNATIONAL STANDARD



Optical fibres –

Part 1-44: Measurement methods and test procedures – Cut-off wavelength

IECNORM.COM : Click to view the full PDF of IEC 60793-1-44:2023 CMV

CONTENTS

FOREWORD	4
1 Scope	6
2 Normative references	6
3 Terms and definitions	6
4 Background	7
5 Overview of methods	7
6 Reference test method	8
7 Apparatus	8
7.1 Light source	8
7.2 Modulation	8
7.3 Launch optics	8
7.4 Support and positioning apparatus	8
7.5 Deployment mandrel	9
7.5.1 General	9
7.5.2 Cable cut-off wavelength deployment, method A	9
7.5.3 Cable cut-off wavelength deployment, method B	9
7.5.4 Fibre cut-off wavelength deployment, method C	9
7.6 Detection optics	10
7.7 Detector assembly and signal detection electronics	10
7.8 Cladding mode stripper	10
8 Sampling specimen	10
8.1 Specimen length	10
8.2 Specimen end face	10
9 Procedure	11
9.1 Positioning of specimen in apparatus	11
9.1.1 General requirements for all methods	11
9.1.2 Deployment requirements for each method	11
9.2 Measurement of output power	11
9.2.1 Overview	11
9.2.2 Bend-reference technique	12
9.2.3 Multimode-reference technique	12
10 Calculations	12
10.1 Bend-reference technique	12
10.2 Multimode-reference technique	13
11 Mapping functions	14
12 Results	14
13 Specification information	15
Annex A (normative) Requirements specific to method A – Cable cut-off wavelength, λ_{CC} , using uncabled fibre	16
A.1 Specimen length	16
A.2 Procedure – Position specimen on deployment mandrel	16
Annex B (normative) Requirements specific to method B – Cable cut-off wavelength, λ_{CC} , using cabled fibre	17
B.1 Specimen length	17
B.2 Procedure – Position specimen on deployment mandrel	17

Annex C (normative) Requirements specific to method C – Fibre cut-off wavelength, λ_c	18
C.1 Specimen length	18
C.2 Procedure – Position specimen on deployment mandrel	18
Annex D (informative) Cut-off curve artifacts	20
D.1 Description of curve artifacts	20
D.2 Curve-fitting technique for artifact filtering	20
D.2.1 Overview	20
D.2.2 General	21
D.2.3 Step 1: define the upper wavelength region	22
D.2.4 Step 2: characterize the spectral transmittance	22
D.2.5 Step 3: calculate the deviation of the spectral transmittance from the linear fit	22
D.2.6 Step 4: determine the end wavelength of the transition region	23
D.2.7 Step 5: determine the start wavelength of the transition region	23
D.2.8 Step 6: characterize the transition region with the theoretical model	23
D.2.9 Step 7: compute the cut-off wavelength, λ_c	24
D.3 Fibre deployment method for artifact attenuation	25
Bibliography	27
Figure 1 – Cut-off measurement system block diagram	7
Figure 2 – Deployment configuration for cable cut-off wavelength λ_{CC} , method A	9
Figure 3 – Deployment configuration for cable cut-off wavelength λ_{CC} , method B	9
Figure 4 – Standard deployment for fibre cut-off wavelength measurement	10
Figure 5 – Cut-off wavelength using the bend-reference technique	11
Figure 6 – Cut-off wavelength using the multimode-reference technique	12
Figure 7 – Cable cut-off vs fibre cut-off for a specific fibre (multimode reference)	14
Figure A.1 – Alternative cable cut-off deployment	16
Figure C.1 – Alternative fibre cut-off deployment – Sliding semi-circle	18
Figure C.2 – Alternative fibre cut-off deployment – Multi-bend	19
Figure C.3 – Alternative fibre cut-off deployment – Large curve	19
Figure D.1 – Cut-off curve with linear fit error (multimode reference)	20
Figure D.2 – Fibre cut-off curve fitting technique (multimode reference)	21
Figure D.3 – Curve fitting regions	21
Figure D.4 – Fibre cut-off curve with artifacts (multimode reference)	25
Figure D.5 – Fibre cut-off curve with artifacts (bend reference)	25
Figure D.6 – Fibre deployment with large diameter bends for mode filtering	26
Figure D.7 – Fibre cut-off curve with mode attenuation (multimode reference)	26

INTERNATIONAL ELECTROTECHNICAL COMMISSION

OPTICAL FIBRES –

**Part 1-44: Measurement methods and test procedures –
Cut-off wavelength**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 60793-1-44 has been prepared by subcommittee 86A: Fibres and cables, of IEC technical committee 86: Fibre optics. It is an International Standard.

This third edition cancels and replaces the second edition published in 2011. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) used the diameter of the fibre loops to describe deployment;
- b) added Annex D related to cut-off curve artifacts;
- c) reorganized information and added more figures to clarify concepts.

The text of this International Standard is based on the following documents:

Draft	Report on voting
86A/2314/FDIS	86A/2327/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

This document is to be read in conjunction with IEC 60793-1-1.

A list of all parts of the IEC 60793-1 series, published under the general title *Optical fibres – Measurement methods and test procedures*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

OPTICAL FIBRES –

Part 1-44: Measurement methods and test procedures – Cut-off wavelength

1 Scope

This part of IEC 60793 establishes uniform requirements for measuring the cut-off wavelength of single-mode optical fibre, thereby assisting in the inspection of fibres and cables for commercial purposes.

This document gives methods for measuring the cut-off wavelength for uncabled or cabled single mode telecom fibre. These procedures apply to all category B and C fibre types.

There are three methods of deployment for measuring the cut-off wavelength:

- method A: cable cut-off using uncabled fibre 22 m long sample, λ_{cc} ;
- method B: cable cut-off using cabled fibre 22 m long sample, λ_{cc} ;
- method C: fibre cut-off using uncabled fibre 2 m long sample, λ_c .

All methods require a reference measurement. There are two reference-scan techniques, either or both of which can be used with all methods:

- bend-reference technique;
- multimode-reference technique using category A1(OM1-OM5) multimode fibre.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60793-1-1, *Optical fibres – Part 1-1: Measurement methods and test procedures – General and guidance*

3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

4 Background

Theoretical cut-off wavelength is the shortest wavelength at which only the fundamental mode can propagate in a single-mode fibre, as computed from the refractive index profile of the fibre.

In optical fibres, the change from multimode to single mode behaviour does not occur at an isolated wavelength, but rather smoothly over a range of wavelengths. For purposes of determining fibre performance in a telecommunications network, theoretical cut-off wavelength is less useful than the lower value actually measured when the fibre is deployed.

Measured cut-off wavelength is defined as the wavelength greater than which the ratio between the total power, including launched higher-order modes, and the fundamental mode power has decreased to less than 0,1 dB. According to this definition, the second-order (LP_{11}) mode undergoes 19,3 dB more attenuation than the fundamental (LP_{01}) mode at the cut-off wavelength.

Because measured cut-off wavelength depends on the length and bends of the fibre, the resulting value of cut-off wavelength depends on whether the measured fibre is configured in a deployed, cabled condition or if it is short and uncabled. Consequently, there are two overall types of cut-off wavelength:

- cable cut-off wavelength (λ_{cc}) measured in an uncabled fibre deployment condition (method A), or in a cabled condition (method B);
- fibre cut-off wavelength (λ_c) measured on a short length of uncabled, primary-coated fibre (method C).

Cable cut-off wavelength is the preferred attribute to be specified and measured.

5 Overview of methods

All of the methods shall use the transmitted-power technique. A general system block diagram is depicted in Figure 1. A fibre specimen is scanned by a wavelength spectrum. The output optical power is measured and stored. This stored data is then analysed against a reference power spectrum. The reference scan normalizes any wavelength-dependent fluctuations in the measurement equipment that is not associated with the loss of the LP_{11} mode. The resulting attenuation will thus properly characterize the cut-off wavelength.

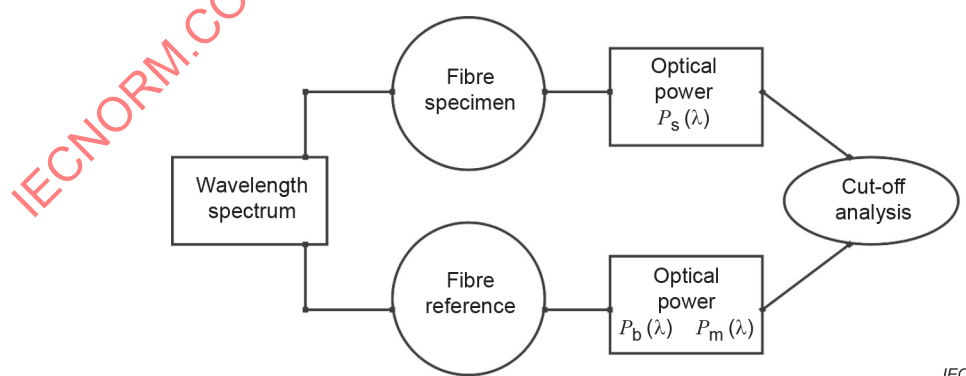


Figure 1 – Cut-off measurement system block diagram

The reference scan uses one of the following two techniques:

- bend reference where a small diameter bend is added to the fibre specimen;
- multimode reference where the optical power through an A1(OM1-OM5) fibre is measured.

Either reference technique can determine the cut-off wavelength of a fibre specimen in a cabled or uncabled condition.

The fibre cut-off wavelength, λ_c , measured under the standard length and bend conditions described in this document, will generally exhibit a value larger than the cable cut-off wavelength, λ_{cc} . For normal installed cable spans, it is common for the measured λ_c value to exceed the long fibre's transmission wavelength.

Cable cut-off wavelength is more useful in describing an installed network system performance and capability, while fibre cut-off would apply to short cables or pigtails. The two cut-off wavelengths can be mapped to each other for a specific fibre type and cut-off measurement method. The customer and the supplier shall agree to the confidence level of each mapping function established (see Clause 11 for details).

6 Reference test method

Method A, cable cut-off wavelength using uncabled fibre, is the reference test method (RTM). This method shall be used to settle any disputes.

7 Apparatus

7.1 Light source

Provide a filtered white light source, with line width not greater than 10 nm, stable in position and intensity. The light source should be capable of operating over the wavelength range 1 000 nm to 1 600 nm for most category B fibres. An operating range of 800 nm to 1 700 nm may be necessary for some B-655 fibres, B-656 fibres or category C fibres. A scanning monochromator with a halogen bulb is one example of this kind of source.

7.2 Modulation

Modulate the light source to prevent ambient light affecting the results, and to aid signal recovery. A mechanical chopper with a reference output is a suitable arrangement.

7.3 Launch optics

Provide launch optics, such as a lens system or a multimode fibre, to overfill the test fibre over the full range of measurement wavelengths. This launch is relatively insensitive to the input end face position of the single-mode fibre and is able to excite the fundamental and any higher-order modes in the specimen. If using a butt splice, provide means of avoiding interference effects.

When using a multimode fibre, overfilling the reference fibre can produce an undesired ripple effect in the power-transmission spectrum. Restrict the launch sufficiently to eliminate the ripple effect. One example of restricted launch is in method A, attenuation by cut-back, of IEC 60793-1-40. Another example of restricted launch is a mandrel-wrap mode filter with sufficient (approximately 4 dB) insertion loss.

7.4 Support and positioning apparatus

Provide a means to stably support the input and output ends of the specimen for the duration of the test; vacuum chucks, magnetic chucks, or connectors may be used for this purpose. Support the fibre ends such that they can be repeatedly positioned in the launch and detection optics. When measuring λ_{cc} in method B, provide a means to suitably support the cable ends. The mechanism used to hold the fibre ends allows for fibre positioning with respect to the launch and detection optics. Holding and moving of the fibre should not cause micro-bends that affect the measurement accuracy.

7.5 Deployment mandrel

7.5.1 General

The fibre specimen's two ends, input and output, are mechanically held in place during the measurement. The deployment and length of the specimen, together with the support apparatus, are key elements of the measurement method, and they distinguish the types of cut-off wavelength.

Additional, alternative deployments may be used if the results obtained have been demonstrated to be empirically equivalent to the results obtained using the standard deployment, to within 10 nm, or they are greater than those achieved with the standard configurations.

7.5.2 Cable cut-off wavelength deployment, method A

Provide a means to make an 80 mm diameter loop at each end of the specimen and a loop of diameter ≥ 280 mm in the central portion. See Figure 2.

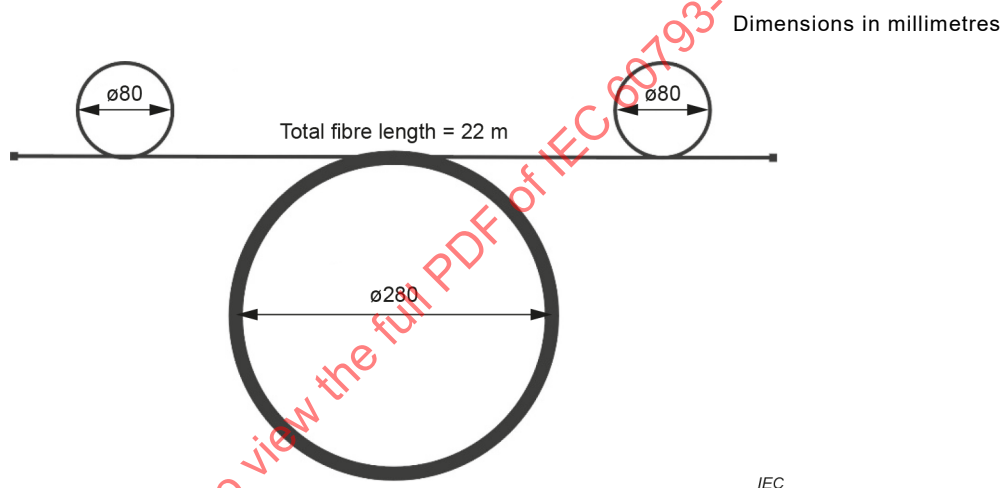


Figure 2 – Deployment configuration for cable cut-off wavelength λ_{cc} , method A

7.5.3 Cable cut-off wavelength deployment, method B

Provide a means to make an 80 mm diameter loop at each end of the specimen. See Figure 3. The cabled fibre between the two 80 mm loops has a bending diameter greater than 280 mm.

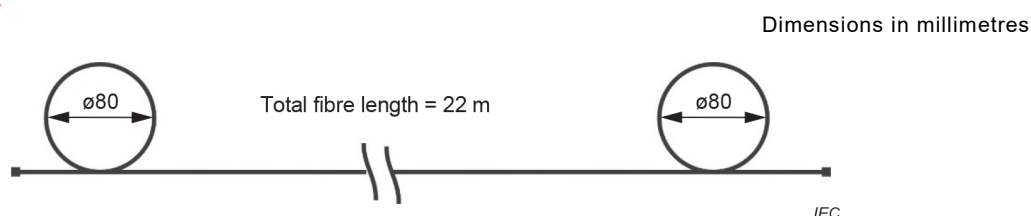


Figure 3 – Deployment configuration for cable cut-off wavelength λ_{cc} , method B

7.5.4 Fibre cut-off wavelength deployment, method C

Provide means to route a fibre specimen through one complete circular loop having a diameter equal to 280 mm, see Figure 4.

Dimensions in millimetres

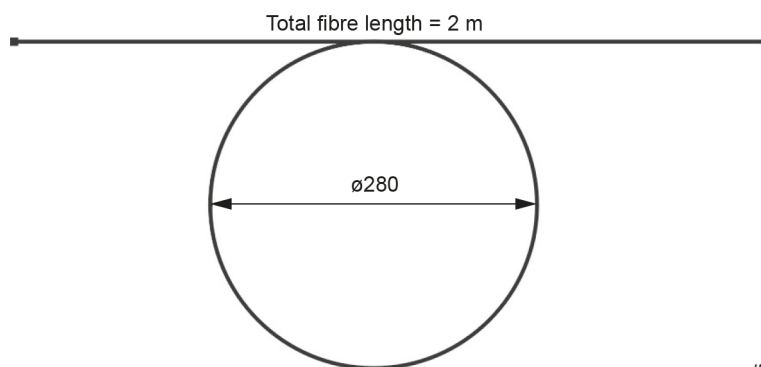


Figure 4 – Standard deployment for fibre cut-off wavelength measurement

7.6 Detection optics

Couple all power emitted from the specimen onto the active region of the detector. As examples, an optical lens system, a butt splice with a multimode fibre pigtailed to a detector, or direct coupling may be used.

7.7 Detector assembly and signal detection electronics

Use a detector that is sensitive to the output radiation over the range of wavelengths to be measured and that is linear over the range of intensities encountered. A typical system might include a germanium or InGaAs photodiode, operating in the photo-voltaic mode, and a current-sensitive preamplifier, with synchronous detection by a lock-in amplifier. Generally, a computer is required to analyse the data.

7.8 Cladding mode stripper

Provide a means to remove cladding-mode power from the specimen. Under some circumstances, the fibre coating will perform this function; otherwise, provide methods or devices that extract cladding-mode power at the input and output ends of the specimen.

8 Sampling specimen

8.1 Specimen length

Choose the specimen length according to which parameter is being measured and, if the parameter is cable cut-off wavelength, the method to be used. See the appropriate annex: Annex A or Annex B for the cable cut-off wavelength measurement or Annex C for fibre cut-off wavelength.

8.2 Specimen end face

Prepare a flat end face, orthogonal to the fibre axis, at the input and output ends of each specimen. An optical fibre cleaver is often used to achieve very flat and clean end faces.

9 Procedure

9.1 Positioning of specimen in apparatus

9.1.1 General requirements for all methods

Align the input and output ends of the specimen to the launch and detection optics. Do not change the launch and detection conditions during the course of the measurement.

Unless otherwise specified, when installing the specimen in the apparatus, and when using a cladding-mode stripper, avoid imposing any additional fibre bends smaller than those specified in the configuration for the particular measurement being made.

9.1.2 Deployment requirements for each method

Deploy the specimen using the information in Clause 7 and the following annexes:

- cable cut-off wavelength, method A (see Annex A);
- cable cut-off wavelength, method B (see Annex B);
- fibre cut-off wavelength, method C (see Annex C).

9.2 Measurement of output power

9.2.1 Overview

Record the output power, $P_s(\lambda)$, along the wavelength range, in increments of 10 nm or less. The range shall be broad enough to encompass the expected cut-off wavelength. The measured power is then normalized by the reference power producing curves similar to Figure 5, bend reference and Figure 6 multimode reference.

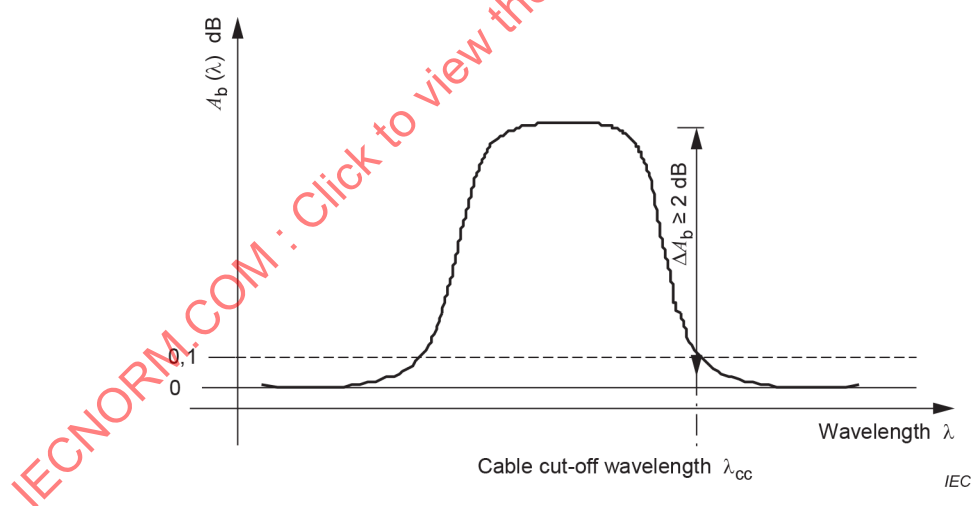


Figure 5 – Cut-off wavelength using the bend-reference technique

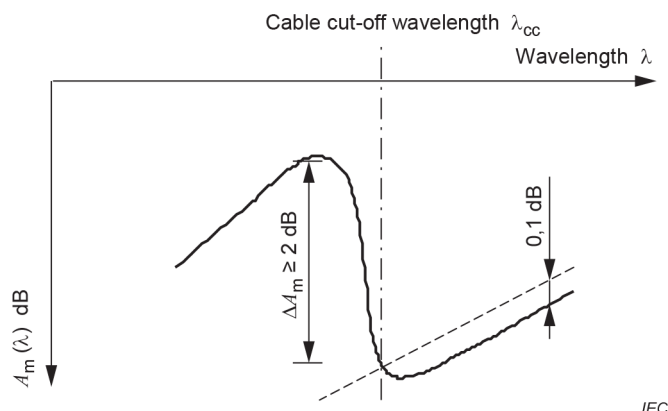


Figure 6 – Cut-off wavelength using the multimode-reference technique

9.2.2 Bend-reference technique

With input and output conditions unchanged, introduce a smaller-diameter bend between input and the output. Record the transmitted spectral power, $P_b(\lambda)$, over the same wavelength range and with the same spectral increments as in making the original measurement on the specimen.

The exact value of the smaller diameter may be determined prior to measurement; it should be small enough to attenuate the second-order mode, but not too small in order to avoid macrobending effects at higher wavelengths. A diameter between 20 mm and 60 mm is typical for most B652 to B656 fibres.

For some bend insensitive fibres (category B-657), the diameter may need to be smaller, and this measurement technique may not be adequate for these fibres. Curve artifacts can persist and require the use of both techniques described in Annex D.

9.2.3 Multimode-reference technique

Replace the specimen with a short (< 10 m) length of category A1(OM1-OM5) multimode fibre as a reference. Record the transmitted signal power, $P_m(\lambda)$, over the same wavelength range and with the same spectral increments as in making the original measurement on the specimen.

NOTE Ripples can occur in the reference spectrum $P_m(\lambda)$. Provide a means to add mode mixing which can reduce this effect; this can be done by wrapping a multimode fibre at least 5 times around a mandrel 10 mm to 20 mm in diameter. A1(OM2-OM5) type multimode fibres are preferred for this technique.

10 Calculations

10.1 Bend-reference technique

Calculate the spectral transmittance of the specimen without the small diameter bend, referenced to the condition where the smaller-radius bend is introduced:

$$A_b(\lambda) = 10 \log_{10} \frac{P_s(\lambda)}{P_b(\lambda)} \text{ in dB} \quad (1)$$

where

$A_b(\lambda)$ is the spectral transmittance referenced to the small diameter bend (dB);

$P_s(\lambda)$ is the spectral optical power through the fibre specimen;

$P_b(\lambda)$ is the spectral optical power through the sample with small diameter bend.

Figure 5 shows a schematic result. The short and long wavelength edges are determined by the specimen deployed with and without the smaller-radius bend, respectively. Determine the longest wavelength at which $A_b(\lambda) = 0,1$ dB from Figure 5. This is the cut-off wavelength, provided that ΔA_b is equal to or greater than 2 dB.

If $\Delta A_b < 2$ dB, or if it is unobservable, broaden the wavelength scan and enlarge the single-mode launch conditions, or decrease the smaller-bend radius. Repeat these adjustments and the measurement procedure until $\Delta A_b > 2$ dB.

For certain implementations of bend-insensitive fibres (category B-657), ΔA_b will not reach 2 dB loss, because of the very nature of these fibres. It is recommended to use the multimode-reference technique as reference scan for these fibres. See Annex D for dealing with curve artifacts that can affect the results.

10.2 Multimode-reference technique

Calculate the spectral transmittance of the specimen, referenced to that of the multimode fibre:

$$A_m(\lambda) = 10 \log_{10} \frac{P_s(\lambda)}{P_m(\lambda)} \quad (2)$$

where

$A_m(\lambda)$ is the spectral transmittance referenced to the multimode fibre (dB);

$P_s(\lambda)$ is the spectral optical power through the specimen;

$P_m(\lambda)$ is the spectral optical power through the multimode reference fibre.

Figure 6 shows a schematic result.

Fit a straight line to the long-wavelength portion of $A_m(\lambda)$, displacing it upward by 0,1 dB, as shown by the dashed line in Figure 6. Determine the longest wavelength at which this displaced line intersects with $A_m(\lambda)$. This is the cut-off wavelength, provided that ΔA_m is equal to or greater than 2 dB. Between measured data points, $A_m(\lambda)$ is defined by linear interpolation.

If $\Delta A_m < 2$ dB, or if it is unobservable, broaden the wavelength scan and enlarge the single-mode launch conditions. Repeat these adjustments and the measurement procedure until $\Delta A_m > 2$ dB, and until the long-wavelength tail is of adequate length to be fitted by a straight line.

NOTE When using the multimode-reference technique, fibres with high cut-off wavelengths, when combined with reference fibres with high water peaks, can have erroneous values reported as cut-off wavelength.

For certain implementations of bend-insensitive fibres (category B-657), the bend-reference technique is not the optimal technique as reference scan. For these fibres, the multimode-reference technique is recommended. See Annex D for dealing with curve artifacts that can affect the results.

11 Mapping functions

A mapping function is a formula by which the measured results of one type of cut-off wavelength are used to predict the results that one would obtain from another type. Figure 7 illustrates the cut-off wavelength difference between the fibre cut-off method C and the cable cut-off method A for a specific fibre type.

An empirical mapping function is specific to a particular fibre type and method. Generate mapping functions by doing an experiment in which a variety of fibre specimens between the two fibre deployment methods are sampled. A linear regression of the respective values will often produce a satisfactory mapping function. When establishing criteria for fibre selection, residual errors in the regression shall be taken into account.

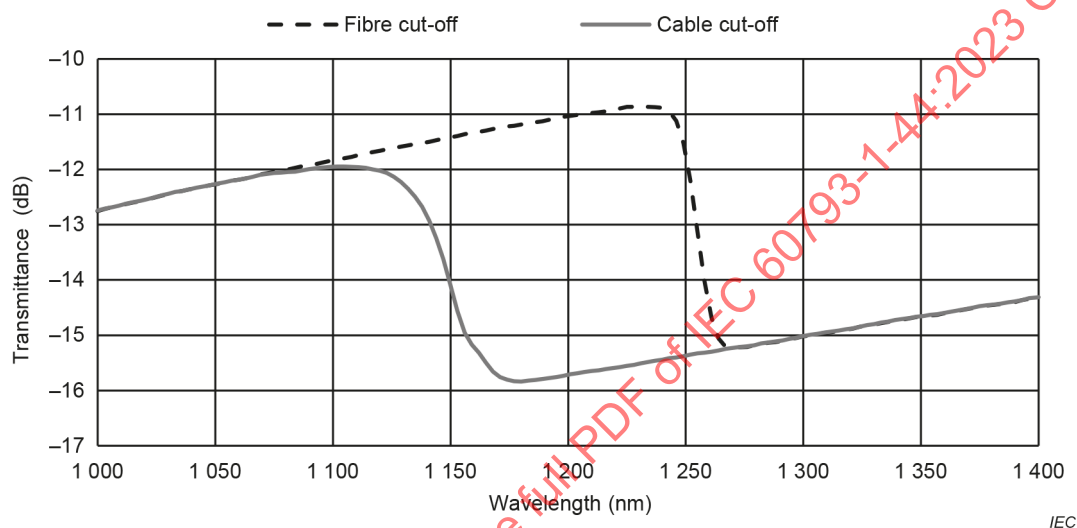


Figure 7 – Cable cut-off vs fibre cut-off for a specific fibre (multimode reference)

12 Results

12.1 Report the following information with each measurement:

- date and title of measurement;
- identification of specimen;
- measurement results.

12.2 The following information shall be available upon request:

- if measuring cable cut-off wavelength, the method used: A or B;
- length of specimen;
- reference technique used (bend or multimode);
- type of multimode fibre used (if using multimode-reference technique);
- description of all key equipment used: light source, launch optics, cladding-mode stripper, specimen-support mechanisms, and detection optics;
- description of monochromator (spectral scanning range, spectral width, and incremental steps);
- description of detection and recording techniques;
- description of deployment configuration used;

- typical plot of the spectral curve, $A_b(\lambda)$ or $A_m(\lambda)$;
- date and certificate of latest calibration of measurement equipment.

13 Specification information

The detail specification shall specify the following information:

- type of fibre or cable to be measured;
- failure or acceptance criteria;
- information to be reported;
- any deviations to the procedure that apply.

IECNORM.COM : Click to view the full PDF of IEC 60793-1-44:2023 CMV

Annex A (normative)

Requirements specific to method A – Cable cut-off wavelength, λ_{cc} , using uncabled fibre

A.1 Specimen length


Use a $22 \text{ m} \pm 1 \text{ m}$ total length of (uncabled) optical fibre.

A.2 Procedure – Position specimen on deployment mandrel

In order to conservatively simulate cabling effects, the specimen has a central coil 20 m long with a minimum diameter of 280 mm (see Figure 2). The 20 m fibre coil has a minimum diameter of 280 mm and should be loosely coiled with minimal stress. The remaining fibre is used to create two 1 m long ends. This specimen is then placed in front of the measurement instrument where an 80 mm diameter loop is applied to each end. The 80 mm loops simulate the effects of a splice organizer. Figure A.1 shows an alternative deployment method for cable cut-off. Alternative to placing loop at each end, two 80 mm loops can be placed at one end.

Since λ_{cc} represents a maximum cut-off value, this configuration is sufficient to ensure specification compliance, because any further effects of cabling, installation, and deployment can only reduce further the cable cut-off wavelength value.

Dimensions in millimetres

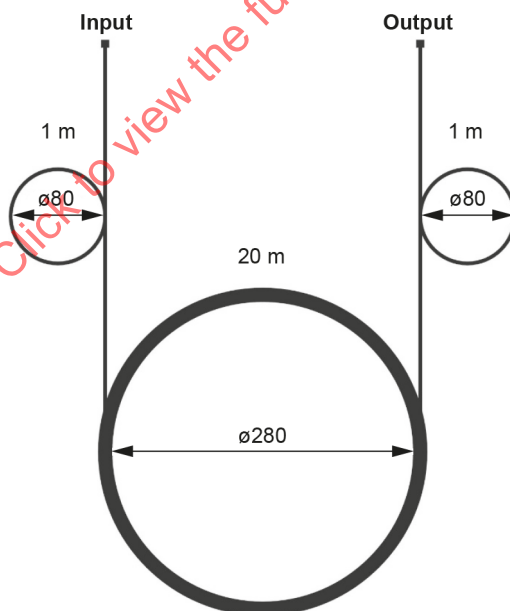

Total fibre length = 22 m

IEC

Figure A.1 – Alternative cable cut-off deployment