

ASME B29.28-2015

High-Strength Chains for Power Transmission and Tension Linkages

ASMENORMDOC.COM : Click to view the full PDF of ASME B29.28 2015

AN AMERICAN NATIONAL STANDARD



**The American Society of
Mechanical Engineers**

ASME B29.28-2015

High-Strength Chains for Power Transmission and Tension Linkages

ASMENORMDOC.COM : Click to view the full PDF of ASME B29.28 2015

AN AMERICAN NATIONAL STANDARD



**The American Society of
Mechanical Engineers**

Two Park Avenue • New York, NY • 10016 USA

Date of Issuance: December 14, 2015

This Standard will be revised when the Society approves the issuance of a new edition.

ASME issues written replies to inquiries concerning interpretations of technical aspects of this Standard. Interpretations are published on the Committee Web page under go.asme.org/InterpsDatabase. Periodically certain actions of the ASME B29 Committee may be published as Cases. Cases are published on the ASME Web site under the B29 Committee Page at go.asme.org/B29committee as they are issued.

Errata to codes and standards may be posted on the ASME Web site under the Committee Pages to provide corrections to incorrectly published items, or to correct typographical or grammatical errors in codes and standards. Such errata shall be used on the date posted.

The B29 Committee Page can be found at go.asme.org/B29committee. There is an option available to automatically receive an e-mail notification when errata are posted to a particular code or standard. This option can be found on the appropriate Committee Page after selecting "Errata" in the "Publication Information" section.

ASME is the registered trademark of The American Society of Mechanical Engineers.

This code or standard was developed under procedures accredited as meeting the criteria for American National Standards. The Standards Committee that approved the code or standard was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed code or standard was made available for public review and comment that provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.

ASME does not "approve," "rate," or "endorse" any item, construction, proprietary device, or activity.

ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable letters patent, nor assumes any such liability. Users of a code or standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, is entirely their own responsibility.

Participation by federal agency representative(s) or person(s) affiliated with industry is not to be interpreted as government or industry endorsement of this code or standard.

ASME accepts responsibility for only those interpretations of this document issued in accordance with the established ASME procedures and policies, which precludes the issuance of interpretations by individuals.

No part of this document may be reproduced in any form,
in an electronic retrieval system or otherwise,
without the prior written permission of the publisher.

The American Society of Mechanical Engineers
Two Park Avenue, New York, NY 10016-5990

Copyright © 2015 by
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS
All rights reserved
Printed in U.S.A.

CONTENTS

Foreword	iv
Committee Roster	v
Correspondence With the B29 Committee	vi
1 Scope	1
2 High-Strength Roller Chains	1
3 References	2
Figure	
1 High-Strength Roller Chain and Components	3
Tables	
1 General Chain Dimensions, in. and lb	4
1M General Chain Dimensions, mm and N	4
2 Dimensional Limits for Interchangeability, in.	5
2M Dimensional Limits for Interchangeability, mm	5
Nonmandatory Appendices	
A Supplementary Information on Chain Selection for Drives	7
B Supplementary Information on Chain Selection for Tension Linkages	19

FOREWORD

For many years, several manufacturers have provided a line of high-strength chains for use on certain construction equipment and other machinery that encounter high starting or shock loads. These high-strength chains generally have medium-carbon, through-hardened pins to withstand high shock loads and solid rollers to withstand very high tooth pressures. These chains are normally offered only in heavy series.

In 2014, the ASME B29 Committee decided to develop a new standard to cover these high-strength chains. The new standard is intended to list limiting dimensions to ensure interchangeability, to set forth minimum tensile strength and dynamic strength values, and to provide supplemental information concerning the application of high-strength chains. This Standard was approved as an American National Standard on September 9, 2015.

ASMENORMDOC.COM : Click to view the full PDF of ASME B29.19-2015

ASME B29 COMMITTEE

Chains, Attachments, and Sprockets for Power Transmission and Conveying

(The following is the roster of the Committee at the time of approval of this Standard.)

STANDARDS COMMITTEE OFFICERS

C. G. Springman, *Chair*
A. J. Binford, *Vice Chair*
R. Richmond, *Secretary*

STANDARDS COMMITTEE PERSONNEL

M. A. Bergel, EBC, A Division of BDI USA
A. J. Binford, IWIS Drive Systems
R. V. Dickey, Hitachi Maxco, Ltd.
D. W. Egbert, Hitachi Maxco, Ltd.
D. G. Fannin, Emerson Power Transmission
G. A. Hansen, *Alternate*, Emerson Power Transmission
W. C. Hall, Ramsey Products Corp.
D. B. Holcomb, *Alternate*, Ramsey Products Corp.
C. R. Langner, Timken Drives, LLC
M. Manickam, Webster Industries, Inc.
S. Rhoad, *Alternate*, Webster Industries, Inc.
E. Pawlicki, Drives, Inc.
R. A. Reinfried, Conveyor Equipment Manufacturers Association
R. Richmond, The American Society of Mechanical Engineers
K. J. Smith, Ken Smith & Associates
C. G. Springman, Diamond Chain Co.
R. Brandon, *Alternate*, Diamond Chain Co.
J. L. Wright, Technical Consultant

CORRESPONDENCE WITH THE B29 COMMITTEE

General. ASME Standards are developed and maintained with the intent to represent the consensus of concerned interests. As such, users of this Standard may interact with the Committee by requesting interpretations, proposing revisions or a Case, and attending Committee meetings. Correspondence should be addressed to:

Secretary, B29 Standards Committee
The American Society of Mechanical Engineers
Two Park Avenue
New York, NY 10016-5990
<http://go.asme.org/Inquiry>

Proposing Revisions. Revisions are made periodically to the Standard to incorporate changes that appear necessary or desirable, as demonstrated by the experience gained from the application of the Standard. Approved revisions will be published periodically.

The Committee welcomes proposals for revisions to this Standard. Such proposals should be as specific as possible, citing the paragraph number(s), the proposed wording, and a detailed description of the reasons for the proposal, including any pertinent documentation.

Proposing a Case. Cases may be issued for the purpose of providing alternative rules when justified, to permit early implementation of an approved revision when the need is urgent, or to provide rules not covered by existing provisions. Cases are effective immediately upon ASME approval and shall be posted on the ASME Committee Web page.

Requests for Cases shall provide a Statement of Need and Background Information. The request should identify the Standard and the paragraph, figure, or table number(s), and be written as a Question and Reply in the same format as existing Cases. Requests for Cases should also indicate the applicable edition(s) of the Standard to which the proposed Case applies.

Interpretations. Upon request, the B29 Standards Committee will render an interpretation of any requirement of the Standard. Interpretations can only be rendered in response to a written request sent to the Secretary of the B29 Standards Committee at go.asme.org/Inquiry.

The request for an interpretation should be clear and unambiguous. It is further recommended that the inquirer submit his/her request in the following format:

Subject:	Cite the applicable paragraph number(s) and the topic of the inquiry.
Edition:	Cite the applicable edition of the Standard for which the interpretation is being requested.
Question:	Phrase the question as a request for an interpretation of a specific requirement suitable for general understanding and use, not as a request for an approval of a proprietary design or situation. The inquirer may also include any plans or drawings that are necessary to explain the question; however, they should not contain proprietary names or information.

Requests that are not in this format may be rewritten in the appropriate format by the Committee prior to being answered, which may inadvertently change the intent of the original request.

ASME procedures provide for reconsideration of any interpretation when or if additional information that might affect an interpretation is available. Further, persons aggrieved by an interpretation may appeal to the cognizant ASME Committee or Subcommittee. ASME does not "approve," "certify," "rate," or "endorse" any item, construction, proprietary device, or activity.

Attending Committee Meetings. The B29 Standards Committee regularly holds meetings and/or telephone conferences that are open to the public. Persons wishing to attend any meeting and/or telephone conference should contact the Secretary of the B29 Standards Committee. Future Committee meeting dates and locations can be found on the Committee Page at go.asme.org/B29committee.

HIGH-STRENGTH CHAINS FOR POWER TRANSMISSION AND TENSION LINKAGES

1 SCOPE

This Standard covers roller chains that are specifically designed to withstand occasional high shock loads or high starting loads that are encountered in certain construction equipment and other severe-duty applications.

WARNING: Chains covered in this Standard shall not be used as the primary lifting member, or in the direct drive line of elevators, escalators, or similar devices for lifting human passengers unless applied in accordance with ASME A17.1. Chains covered in this Standard shall not be used as climbing chains.

2 HIGH-STRENGTH ROLLER CHAINS

2.1 Nomenclature

high-strength roller chain: roller chain consisting of a series of alternately assembled roller links [see Fig. 1, illustrations (a) and (b)] and pin links [see Fig. 1, illustration (c) and *pin link*] in which the pins articulate inside the bushings and the rollers are free to turn on the bushings. The pins and bushings are press fit in their respective link plates.

roller link: link consisting of two roller link plates A–A, two bushings B–B, and two rollers C–C.

pin link: link consisting of two pin link plates E–E, and two pins F–F.

NOTES:

- (1) Only heavy series high-strength roller chains are covered in this Standard.
- (2) Multiple-strand high-strength roller chains are not covered in this Standard.

cotter-type connecting link: link consisting of a pin link plate E, two cross-drilled pins G–G, and a detachable pin link plate D, retained by two cotters H–H. Cotter-type connecting links are used to connect the chain end-less on a drive, or to connect the ends of the chain to terminal fittings in a tension linkage [see Fig. 1, illustration (d)]. Some manufacturers may use a retention means other than, but equivalent to, cotters.

NOTE: Offset links for high-strength roller chains are not covered in this Standard.

2.2 General Proportions

The general proportions of high-strength roller chains are the same as for heavy series chains listed in ASME B29.1.

2.3 Numbering System

For chains covered in this Standard, the right-hand digit in the number is a zero. The numbers to the left of the right-hand digit denote the number of eighths-of-an-inch in the chain pitch. The letters following the chain number shall be “HE” with the letter “H” denoting heavy series and the letter “E” denoting high-tensile strength.

2.4 Chain Strength Requirements

2.4.1 Minimum Ultimate Tensile Strength. The minimum ultimate tensile strength (M.U.T.S.) for chains covered in this Standard is the minimum force at which an unused, undamaged chain could fail when subjected to a single tensile loading test.

WARNING: The M.U.T.S. is NOT a working load! The M.U.T.S. greatly exceeds the maximum force that may be applied to the chain in service.

(a) *Test Specimen.* A length of chain, containing not less than five free pitches, shall be submitted for testing.

(b) *Test Procedure.* A tensile force shall be applied slowly, not to exceed 2.0 in./min (50.8 mm/min), in a uniaxial direction, to the ends of the test specimen.

(c) *Conformance.* Chains conforming to this Standard shall have a M.U.T.S. equal to or greater than the value listed for that specific chain listed in Table 1 or 1M.

WARNING: The tensile test is a destructive test! Even though the chain might not visibly fail when subjected to the minimum ultimate tensile force, it will have been damaged and will be unfit for service.

2.4.2 Minimum Dynamic Strength. Only high-strength chains are subject to the minimum dynamic strength requirement; connecting links are not.

WARNING: The dynamic test values are not valid characteristics for designing actual applications. Neither the specified values nor the test results are to be interpreted as allowable working loads.

(a) *Test Procedure.* The chain shall be tested according to the conformance test described in ASME B29.26.

(b) *Conformance.* Chains covered in this Standard shall survive a conformance test at load listed for the subject chain in Table 1 or 1M.

WARNING: The dynamic test is a destructive test! Even though the chain might have survived the test without failure, it will have been damaged and will be unfit for service.

2.5 Chain Preloading

Chains covered in this Standard shall be preloaded during manufacture by applying an axial tensile force equal to a minimum of 30% of the M.U.T.S. listed for the subject chain in Table 1 or 1M.

2.6 Chain Length

2.6.1 Measuring Load. Measuring load is the tensile force under which the chain is to be measured. It is equal to $125 \times (\text{chain pitch in inches})^2$ in pounds, with a minimum of 70 lb (0.31 kN), and a maximum of 1,000 lb (4.45 kN). Length measurements are to be taken over a length of at least 12 in. (300 mm).

2.6.2 Chain Length Tolerance. New chains, under standard measuring load, shall not be underlength. Overlength tolerance, under standard measuring load, is $0.001/(\text{pitch, in inches})^2 + 0.015$, in./ft.

2.7 General Chain Dimensions

See Tables 1 and 1M.

2.8 Dimensional Limits for Interchangeability

See Tables 2 and 2M.


3 REFERENCES

The following is a list of publications referenced in this Standard. Unless otherwise specified, the standard(s) referenced shall be the most recently issued at the time of order placement.


ASME A17.1, Safety Code for Elevators and Escalators
 ASME B29.1, Precision Power Transmission Roller Chains, Attachments, and Sprockets
 ASME B29.26, Fatigue Testing Power Transmission Roller Chain

Publisher: The American Society of Mechanical Engineers (ASME), Two Park Avenue, New York, NY 10016-5990 (www.asme.org)


Fig. 1 High-Strength Roller Chain and Components

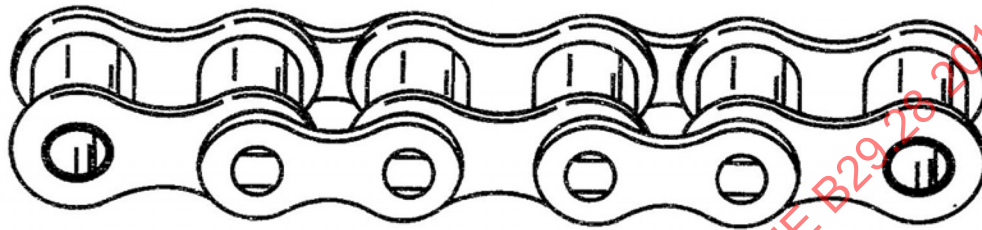


(a) High-Strength Roller Chain




(b) Roller Link



(c) Pin Link

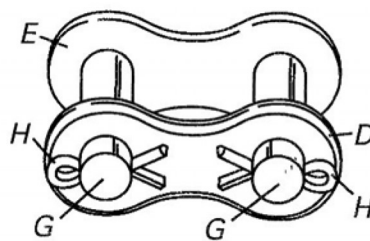

(d) Cotter-Type Connecting Link

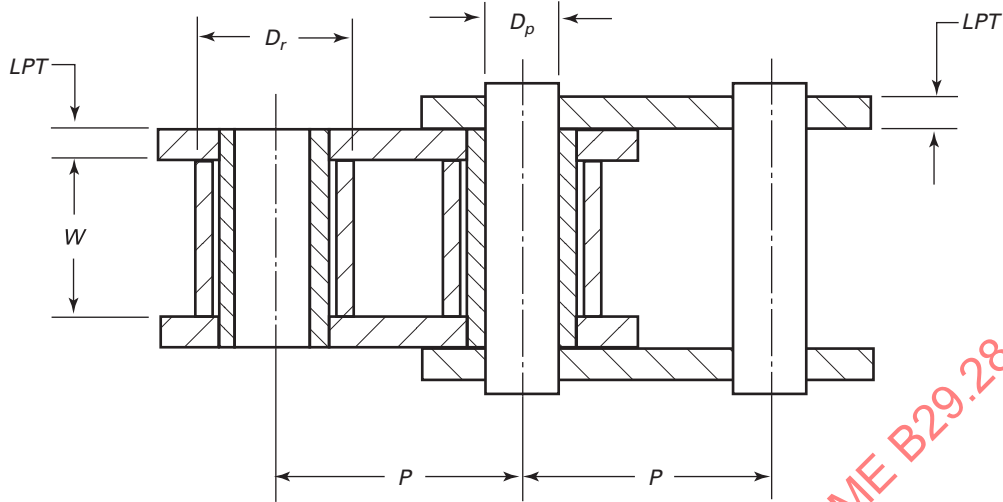Table 1 General Chain Dimensions, in. and lb

D_p = pin diameter
 D_r = roller diameter
 LPT = link plate thickness
 P = chain pitch
 W = chain width between roller link plates

Chain Number	Pitch, P	Maximum Roller Diameter, D_r	Nominal Width, W	Nominal Pin Diameter, D_p	Link Plate Thickness, LPT	Maximum Width Over Regular Pin	Add for Connecting Pin Head	Length Tolerance, in./ft	Measuring Load, lb	M.U.T.S., lb	Minimum Dynamic Strength, lb
60HE	0.75	0.469	0.500	0.234	0.125	1.19	0.17	0.017	70	9,330	1,420
80HE	1.00	0.625	0.625	0.312	0.156	1.47	0.20	0.016	125	15,600	2,400
100HE	1.25	0.750	0.750	0.375	0.187	1.75	0.23	0.016	195	23,400	3,590
120HE	1.50	0.875	1.000	0.437	0.219	2.16	0.27	0.015	281	32,800	5,000
140HE	1.75	1.000	1.000	0.500	0.250	2.32	0.30	0.015	383	43,600	6,560
160HE	2.00	1.125	1.250	0.562	0.281	2.73	0.34	0.015	500	56,200	8,290
180HE	2.25	1.406	1.406	0.687	0.312	3.04	0.37	0.015	633	69,900	10,200
200HE	2.50	1.562	1.562	0.781	0.375	3.43	0.40	0.015	781	93,500	12,700
240HE	3.00	1.875	1.875	0.937	0.500	4.38	0.47	0.015	1,000	149,000	18,300

Table 1M General Chain Dimensions, mm and N

Chain Number	Pitch, P	Maximum Roller Diameter, D_r	Nominal Width, W	Nominal Pin Diameter, D_p	Link Plate Thickness, LPT	Maximum Width Over Regular Pin	Add for Connecting Pin Head	Length Tolerance, mm/m	Measuring Load, N	M.U.T.S., kN	Minimum Dynamic Strength, N
60HE	19.05	11.91	12.70	5.94	3.18	30.23	4.32	1.417	311	41.5	6 330
80HE	25.40	15.88	15.88	7.92	3.96	37.34	5.08	1.333	556	69.2	10 700
100HE	31.75	19.05	19.05	9.53	4.75	44.45	5.84	1.333	867	104.0	16 000
120HE	38.10	22.23	25.40	11.10	5.56	54.86	6.86	1.250	1 250	146.0	22 200
140HE	44.45	25.40	25.40	12.70	6.35	58.93	7.62	1.250	1 704	194.0	29 200
160HE	50.80	28.58	31.75	14.27	7.14	69.34	8.64	1.250	2 224	250.0	36 900
180HE	57.15	35.71	35.71	17.45	7.92	77.22	9.40	1.250	2 816	311.0	45 200
200HE	63.50	39.67	39.67	19.84	9.53	87.12	10.16	1.250	3 474	416.0	56 600
240HE	76.20	47.63	47.63	23.80	12.70	111.25	11.94	1.250	4 448	664.0	81 400

Table 2 Dimensional Limits for Interchangeability, in.

Chain Number	60HE	80HE	100HE	120HE	140HE	160HE	180HE	200HE	240HE
Chain Pitch	0.75	1.00	1.25	1.50	1.75	2.00	2.25	2.50	3.00
Min. distance between roller link plates	0.495	0.620	0.744	0.993	0.993	1.242	1.397	1.490	1.864
Max. width of roller link	0.765	0.956	1.146	1.464	1.530	1.846	2.067	2.295	2.935
Min. distance between pin link plates	0.767	0.958	1.148	1.466	1.532	1.848	2.069	2.297	2.937
Max. pin diameter	0.2346	0.3126	0.3756	0.4374	0.5004	0.5626	0.6874	0.7815	0.9374
Min. hole in bushing	0.2354	0.3134	0.3764	0.4386	0.5016	0.5634	0.6886	0.7823	0.9386

Table 2M Dimensional Limits for Interchangeability, mm

Chain Number	60HE	80HE	100HE	120HE	140HE	160HE	180HE	200HE	240HE
Chain Pitch	19.05	25.40	31.75	38.10	44.45	50.80	57.15	63.50	76.20
Min. distance between roller link plates	12.57	15.75	18.90	25.22	25.22	31.55	35.48	37.85	47.35
Max. width of roller link	19.43	24.28	29.11	37.19	38.86	46.89	52.50	58.29	74.55
Min. distance between pin link plates	19.48	24.33	29.16	37.24	38.91	46.94	52.55	58.34	74.60
Max. pin diameter	5.96	7.94	9.54	11.11	12.71	14.29	17.46	19.85	23.81
Min. hole in bushing	5.98	7.96	9.56	11.14	12.74	14.31	17.49	19.87	23.84

INTENTIONALLY LEFT BLANK

ASMENORMDOC.COM : Click to view the full PDF of ASME B29.28 2015

NONMANDATORY APPENDIX A

SUPPLEMENTARY INFORMATION ON CHAIN SELECTION FOR DRIVES

A-1 DESIGN FACTORS

A-1.1 General

The horsepower ratings in Tables A-1 through A-9 generally apply to lubricated single-pitch, single-strand roller chains for heavy series chains defined in this Standard. The horsepower ratings reflect a service factor of 1, a chain length of 100 pitches, use of interference-fit connecting links, use of recommended lubrication methods, and a drive arrangement where two aligned sprockets are mounted on parallel shafts in a horizontal plane. Under these conditions, approximately 15,000 hr of service life at full-load operation can be expected.

Substantial increases in rated speeds and loads may be utilized, as when a service life of less than 15,000 hr is satisfactory, or when full-load operation is encountered only during a portion of the required service life.

It is beyond the scope of this Standard to present selection procedures for all conditions. Consult chain manufacturers for assistance with these or any other special application requirements.

A-1.2 Drive Selection

The horsepower ratings relate to the speed of the smaller sprocket, and drive selections are made on this basis, whether the drive is speed reducing or speed increasing.

Drives with more than two sprockets, idlers, composite duty cycles, or other unusual conditions require special consideration. Consult chain manufacturers for selections of this nature.

Where quietness or extra smooth operation are of special importance, a small-pitch chain operating over large-diameter sprockets will minimize noise and vibration.

When making drive selections, consideration is given to the loads imposed on the chain by the type of input power and the type of equipment to be driven. Service factors are used to compensate for these loads, and the required horsepower rating of the chain is determined by the following equation:

$$\text{Required HP} = \text{HP to be transmitted} \times \text{service factor}$$

A-2 SERVICE FACTORS

The service factors in Table A-10 are for normal chain loading. For unusual or extremely severe operating conditions not shown in this table, it is desirable to use larger service factors.

The service factors shown in Table A-10 do not account for large inertial loads imposed on the chain by starts or sudden stops when the chain is fully loaded. Consult the chain manufacturer for advice on the absolute maximum tension that may be applied to the chain. A high-strength roller chain should never be loaded to more than 50% of its M.U.T.S.

A-3 LUBRICATION

It has been shown that a separating wedge of fluid lubricant is formed in operating chain joints, much like that formed in journal bearings. Therefore, fluid lubricant must be applied to ensure an oil supply to the joints and minimize metal-to-metal contact. Lubrication, if supplied in sufficient volume, also provides effective cooling and impact damping at the higher speeds. For this reason, it is important that the lubrication recommendations be followed.

NOTES:

- (1) The horsepower rating tables apply only to drives lubricated in the manner specified in the tables.
- (2) Zero values in the horsepower rating tables indicate speeds beyond the maximum recommended. Operation at these speeds might result in excessive chain joint galling, regardless of the volume of lubricant applied.

Chain drives should be protected against dirt and moisture, and the oil supply should be kept free of contamination. Periodic oil change is desirable. A good grade of nondetergent petroleum-base oil is recommended. Heavy oils and greases are generally too stiff to enter and fill the chain joints. Table A-11 indicates the proper lubricant viscosity for various surrounding temperatures.

There are three basic types of lubrication for chain drives. The recommended type shown in the horsepower rating tables is influenced by chain speed and the amount of power transmitted.

These are minimum lubrication requirements, and the use of a better type (e.g., Type C instead of Type B) is acceptable and might be beneficial. Chain life can vary

appreciably, depending upon the way the drive is lubricated. The better the lubrication, the longer the chain life. For this reason, it is important that the lubrication recommendations be followed when using the ratings given in these tables.

A-3.1 Type A — Manual or Drip Lubrication

(a) For manual lubrication, oil is applied copiously with a brush or spout can at least once every 8 hr of operation. Volume and frequency should be sufficient to prevent overheating of the chain or discoloration in the chain joints.

(b) For drip lubrication, oil drops are directed between the link plate edges from a drip lubricator. Volume and frequency should be sufficient to prevent discoloration of lubricant in the chain joints. Precaution must be taken against misdirection of the drops by windage.

A-3.2 Type B — Bath or Disc Lubrication

(a) For bath lubrication, the lower strand of chain runs through a sump of oil in the drive housing. The oil level should reach the pitch line of the chain at its lowest point while operating.

(b) For disc lubrication, the chain operates above the oil level. The disc picks up oil from the sump and deposits it onto the chain, usually by means of a trough. The diameter of the disc should be such as to produce rim speeds between 600 ft/min (182.9 m/min) and 8,000 ft/min (2.44 km/min).

A-3.3 Type C — Oil Stream Lubrication

The lubricant is usually supplied by a circulating pump capable of supplying each chain drive with a continuous stream of oil. The oil should be directed at the slack strand, and applied inside the chain loop and evenly across the chain width.

Consult chain manufacturers when it appears desirable to use a type of lubrication other than that recommended.

A-4 SPROCKETS

Sprockets should have tooth form, thickness, profile, and diameters conforming to ASME B29.1. Sprockets with fewer than 25 teeth should have an odd number of teeth to equalize wear on all of the teeth. Sprockets with 25 teeth or less should have hardened teeth. Normally, large sprockets should not exceed 120 teeth.

A-5 CENTER DISTANCE

In general, a center distance of 30 chain pitches to 50 chain pitches is most desirable. The distance between the sprocket centers should provide at least a 120-deg chain wrap on the smaller sprocket.

Drives may be installed with either adjustable or fixed center distances. Adjustable centers simplify the control of chain slack.

For drives on fixed centers, an idler or shoe may be used to provide slack adjustment. These devices may also be used to control backlash, or to ensure a 120-deg minimum chain wrap on the smaller sprocket. Idler sprockets should have at least three teeth engaging the chain. There should be at least three free pitches of chain between engagement points on adjacent sprockets.

NOTE: Sufficient housing clearance must always be provided for the slack chain to obtain full chain life.

A-6 ALIGNMENT

Accurate alignment of shafts and sprocket tooth faces provides uniform distribution of the load across the entire chain width and contributes substantially to optimum drive life. Shafting, bearings, and foundations should be suitable to maintain the initial alignment. Periodic maintenance should include an inspection of alignment to ensure optimum chain life.

A-7 GUARDING

Adequate guarding should be provided to contain the chain in the event that a broken chain is thrown off a drive while operating at speed.

If the chain is used in a hoist or other lifting device (not for human passengers), a brake or other restraining device should be provided to stop and hold the load in the event of a broken chain.

A-8 HORSEPOWER RATINGS TABLES

To use the horsepower ratings in Tables A-1 through A-9 properly, the following factors must be taken into consideration:

(a) *Service Factors.* See Table A-10.

(b) *Lubrication.* The horsepower established from the sprocket and speed combination of the drive under consideration will indicate a method of lubrication. This method or a better one must be used to obtain optimum chain life.

NOTES:

- (1) The horsepower ratings permit the use of interference-fit connecting links. Chains using slip-fit connecting links might not meet these ratings.
- (2) The horsepower ratings in Tables A-1 through A-9 are identical to those for heavy series chains in ASME B29.1. They are reprinted here for convenience.

Table A-1 Horsepower Ratings, Single-Strand Roller Chain No. 60HE (0.750 in. Pitch)

No. of Teeth	Small Sprocket Speed, Revolutions/min																								Type C [Note (3)]			
	10	25	50	90	100	200	300	400	500	600	800	1,000	1,200	1,400	1,600	1,800	2,000	2,500	3,000	3,500	4,000	4,500	5,000	5,500				
11	0.22	0.53	1.02	1.80	1.99	3.87	5.72	7.53	9.33	11.12	14.66	15.58	11.85	9.41	7.70	6.45	5.51	3.94	3.00	2.38	1.95	1.63	1.39	1.21	0.00			
12	0.24	0.57	1.12	1.96	2.17	4.23	6.24	8.22	10.18	12.13	15.99	17.75	13.51	10.72	8.77	7.35	6.28	4.49	3.42	2.71	2.22	1.86	1.59	0.00				
13	0.26	0.62	1.21	2.13	2.35	4.58	6.76	8.90	11.03	13.14	17.32	20.02	15.23	12.08	9.89	8.29	7.08	5.06	3.85	3.06	2.50	2.10	1.79	0.00				
14	0.28	0.67	1.30	2.29	2.53	4.93	7.27	9.59	11.88	14.15	18.65	22.37	17.02	13.51	11.05	9.26	7.91	5.66	4.31	3.42	2.80	2.34	0.00					
15	0.30	0.72	1.40	2.45	2.71	5.28	7.79	10.27	12.73	15.16	19.99	24.76	18.87	14.98	12.26	10.27	8.77	6.28	4.77	3.79	3.10	2.60	0.00					
16	0.32	0.77	1.49	2.62	2.90	5.63	8.31	10.96	13.58	16.17	21.32	26.41	20.79	16.50	13.51	11.32	9.66	6.91	5.26	4.17	3.42	0.00						
17	0.34	0.81	1.58	2.78	3.08	5.99	8.83	11.64	14.43	17.18	22.65	28.06	22.77	18.07	14.79	12.40	10.58	7.57	5.76	4.57	3.74	0.00						
18	0.36	0.86	1.67	2.94	3.26	6.34	9.35	12.33	15.27	18.20	23.98	29.71	24.81	19.69	16.11	13.51	11.53	8.25	6.28	4.98	1.06	0.00						
19	0.38	0.91	1.77	3.11	3.44	6.69	9.87	13.01	16.12	19.21	25.32	31.36	26.91	21.35	17.48	14.65	12.50	8.95	6.81	5.40	0.00							
20	0.40	0.96	1.86	3.27	3.62	7.04	10.39	13.70	16.97	20.22	26.65	33.01	29.06	23.06	18.87	15.82	13.51	9.66	7.35	5.83	0.00							
21	0.42	1.00	1.95	3.44	3.80	7.39	10.91	14.38	17.82	21.23	27.98	34.66	31.26	24.81	20.31	17.02	14.53	10.40	7.91	4.87	0.00							
22	0.44	1.05	2.05	3.60	3.98	7.75	11.43	15.07	18.67	22.24	29.31	36.32	33.52	26.60	21.77	18.25	15.58	11.15	8.48	0.00								
23	0.46	1.10	2.14	3.76	4.16	8.10	11.95	15.75	19.52	23.25	30.65	37.97	35.84	28.44	23.28	19.51	16.66	11.92	9.07	0.00								
24	0.48	1.15	2.23	3.93	4.34	8.45	12.47	16.44	20.37	24.26	31.98	39.62	38.20	30.31	24.81	20.79	17.75	12.70	9.66	0.00								
25	0.50	1.20	2.33	4.09	4.52	8.80	12.99	17.12	21.21	25.27	33.31	41.27	40.61	32.23	26.38	22.11	18.87	13.51	10.27	0.00								
26	0.52	1.24	2.42	4.25	4.71	9.15	13.51	17.81	22.06	26.28	34.64	42.92	43.07	34.18	27.98	23.44	20.02	14.32	4.17	0.00								
28	0.56	1.34	2.61	4.58	5.07	9.86	14.55	19.18	23.76	28.30	37.31	46.22	48.14	38.20	31.26	26.20	22.37	16.01	0.00									
30	0.60	1.43	2.79	4.91	5.43	10.56	15.59	20.55	25.46	30.33	39.97	49.52	53.38	42.36	34.67	29.06	24.81	17.75	0.00									
32	0.64	1.53	2.98	5.23	5.79	11.27	16.63	21.92	27.15	32.35	42.64	52.82	58.81	46.67	38.20	32.01	27.33	11.45	0.00									
35	0.69	1.67	3.26	5.73	6.33	12.32	18.19	23.97	29.70	35.38	46.63	57.77	67.27	53.38	43.69	36.62	31.26	0.00										
40	0.79	1.91	3.72	6.54	7.24	14.08	20.79	27.40	33.94	40.43	53.30	66.03	78.66	65.22	53.38	44.74	37.65	0.00										
45	0.89	2.15	4.19	7.36	8.14	15.84	23.38	30.82	38.18	45.49	59.96	74.28	88.49	77.83	63.70	37.00	30.00	0.00										
Type A [Note (1)]																	Type B [Note (2)]				Type C [Note (3)]							

NOTES:

- (1) Type A: Manual or drip lubrication
 (2) Type B: Bath or disc lubrication
 (3) Type C: Oil stream lubrication

Table A-2 Horsepower Ratings, Single-Strand Roller Chain No. 80HE (1.000 in. Pitch)

No. of Teeth	Small Sprocket Speed, Revolutions/min																								Type C [Note (3)]			
	10	25	50	70	100	150	200	300	400	500	600	700	800	900	1,000	1,100	1,200	1,400	1,600	1,800	2,000	2,200	2,400	3,000				
11	0.49	1.19	2.31	3.19	4.50	6.64	8.75	12.91	17.02	21.08	25.12	29.12	27.41	22.97	19.61	17.00	14.92	11.84	9.69	8.12	6.93	6.01	5.27	3.77	3.27	2.87	2.45	0.00
12	0.54	1.30	2.52	3.48	4.91	7.24	9.54	14.09	18.57	23.00	27.40	31.77	31.23	26.17	22.35	19.37	17.00	13.49	11.04	9.25	7.90	6.85	6.01	4.30	3.73	3.27	2.79	0.00
13	0.58	1.40	2.73	3.77	5.31	7.84	10.34	15.26	20.11	24.92	29.68	34.42	35.22	29.51	25.20	21.84	19.17	15.21	12.45	10.43	8.91	7.72	6.78	4.85	4.20	3.69	0.00	
14	0.63	1.51	2.94	4.06	5.72	8.45	11.13	16.43	21.66	26.83	31.97	37.07	39.36	32.98	28.16	24.41	21.42	17.00	13.91	11.66	9.96	8.63	7.57	5.42	4.70	2.02	0.00	
15	0.67	1.62	3.15	4.35	6.13	9.05	11.93	17.61	23.21	28.75	34.25	39.71	43.65	36.58	31.23	27.07	23.76	18.85	15.43	12.93	11.04	9.57	8.40	6.01	5.21	0.00		
16	0.72	1.73	3.36	4.64	6.54	9.65	12.73	18.78	24.75	30.67	36.53	42.36	48.08	40.30	34.41	29.82	26.17	20.77	17.00	14.25	12.16	10.54	9.25	6.62	0.00			
17	0.76	1.84	3.57	4.94	6.95	10.26	13.52	19.95	26.30	32.59	38.82	45.01	51.17	44.13	37.68	32.66	28.66	22.75	18.62	15.60	13.32	11.55	10.13	7.25	0.00			
18	0.81	1.94	3.78	5.23	7.36	10.86	14.32	21.13	27.85	34.50	41.10	47.66	54.17	48.08	41.05	35.59	31.23	24.78	20.29	17.00	14.51	12.58	11.04	1.88	0.00			
19	0.85	2.05	3.99	5.52	7.77	11.46	15.11	22.30	29.40	36.42	43.38	50.30	57.18	52.15	44.52	38.59	33.87	26.88	22.00	18.44	15.74	13.64	11.97	0.00				
20	0.90	2.16	4.20	5.81	8.18	12.07	15.91	23.48	30.94	38.34	45.67	52.95	60.19	56.32	48.08	41.68	36.58	29.03	23.76	19.91	17.00	14.74	12.93	0.00				
21	0.94	2.27	4.41	6.10	8.59	12.67	16.70	24.65	32.49	40.25	47.95	55.60	63.20	60.59	51.73	44.84	39.36	31.23	25.56	21.42	18.29	15.85	13.91	0.00				
22	0.99	2.38	4.62	6.39	8.99	13.27	17.50	25.82	34.04	42.17	50.24	58.25	66.21	64.97	55.47	48.08	42.20	33.49	27.41	22.97	19.61	17.00	14.92	0.00				
23	1.03	2.48	4.83	6.68	9.40	13.88	18.29	27.00	35.58	44.09	52.52	60.89	69.22	69.45	59.30	51.40	45.11	35.80	29.30	24.55	20.97	18.17	15.95	0.00				
24	1.08	2.59	5.04	6.97	9.81	14.48	19.09	28.17	37.13	46.00	54.80	63.54	72.23	74.03	63.21	54.79	48.08	38.16	31.23	26.17	22.35	19.37	5.44	0.00				
25	1.12	2.70	5.25	7.26	10.22	15.09	19.88	29.35	38.68	47.92	57.09	66.19	75.24	78.70	67.20	58.25	51.12	40.57	33.20	27.83	23.76	20.59	0.00					
26	1.17	2.81	5.46	7.55	10.63	15.69	20.68	30.52	40.23	49.84	59.37	68.84	78.25	83.47	71.27	61.78	54.22	43.02	35.22	29.51	25.20	16.77	0.00					
28	1.26	3.03	5.88	8.13	11.45	16.90	22.27	32.87	43.32	53.67	63.94	74.13	84.27	93.29	79.65	69.04	60.59	48.08	39.36	32.98	28.16	0.00						
30	1.34	3.24	6.31	8.71	12.27	18.10	23.86	35.21	46.41	57.50	68.50	79.43	90.29	101.10	88.33	76.57	67.20	53.33	43.65	36.58	12.26	0.00						
32	1.43	3.46	6.73	9.29	13.08	19.31	25.45	37.56	49.51	61.34	73.07	84.72	96.31	107.84	97.31	84.35	74.03	58.75	48.08	39.43	0.00							
35	1.57	3.78	7.36	10.16	14.31	21.12	27.84	41.08	54.15	67.09	79.92	92.67	105.34	117.95	111.31	96.49	84.68	67.20	55.00	5.58	0.00							
40	1.79	4.32	8.41	11.61	16.35	24.14	31.81	46.95	61.89	76.67	91.34	105.90	120.39	134.80	136.00	117.88	103.46	82.10	14.36	0.00								
45	2.02	4.86	9.46	13.06	18.40	27.15	35.79	52.82	69.62	86.25	102.75	119.14	135.44	151.65	162.28	140.66	123.45	43.25	0.00									
Type A [Note (1)]		Type B [Note (2)]																Type C [Note (3)]										

NOTES:

- (1) Type A: Manual or drip lubrication
 (2) Type B: Bath or disc lubrication
 (3) Type C: Oil stream lubrication

Table A-3 Horsepower Ratings, Single-Strand Roller Chain No. 100HE (1.250 in. Pitch)

No. of Teeth	Small Sprocket Speed, Revolutions/min																							Type A [Note (1)]	Type B [Note (2)]	Type C [Note (3)]
	10	25	50	58	100	200	300	400	500	600	700	800	900	1,000	1,100	1,200	1,400	1,600	1,800	2,000	2,200	2,400	2,700			
11	0.93	2.23	4.34	5.01	8.45	16.43	24.25	31.96	39.60	47.18	40.03	32.77	27.46	23.45	20.32	17.84	14.15	11.58	9.71	8.29	7.19	6.31	5.28	4.51	0.00	
12	1.01	2.44	4.74	5.46	9.21	17.93	26.46	34.87	43.20	51.46	45.61	37.33	31.29	26.71	23.16	20.32	16.13	13.20	11.06	9.45	8.19	7.19	6.02	5.14	0.00	
13	1.09	2.64	5.13	5.92	9.98	19.42	28.66	37.78	46.80	55.75	51.43	42.10	35.28	30.12	26.11	22.92	18.18	14.88	12.47	10.65	9.23	8.10	6.79	5.80	0.00	
14	1.18	2.84	5.53	6.37	10.75	20.91	30.86	40.68	50.40	60.04	57.48	47.05	39.43	33.66	29.18	25.61	20.32	16.63	13.94	11.90	10.32	9.05	7.59	0.00	0.00	
15	1.26	3.04	5.92	6.83	11.52	22.41	33.07	43.59	54.00	64.33	63.75	52.18	43.73	37.33	32.36	28.40	22.54	18.45	15.46	13.20	11.44	10.04	8.42	0.00	0.00	
16	1.35	3.25	6.32	7.28	12.29	23.90	35.27	46.49	57.60	68.62	70.23	57.48	48.17	41.13	35.65	31.29	24.83	20.32	17.03	14.54	12.60	11.06	0.00	0.00	0.00	
17	1.43	3.45	6.71	7.74	13.05	25.39	37.48	49.40	61.20	72.91	76.91	62.95	52.76	45.05	39.04	34.27	27.19	22.26	18.65	15.93	13.80	12.12	0.00	0.00	0.00	
18	1.52	3.65	7.11	8.19	13.82	26.89	39.68	52.31	64.80	77.20	83.80	68.59	57.48	49.08	42.54	37.33	29.63	24.25	20.32	17.35	15.04	2.94	0.00	0.00	0.00	
19	1.60	3.86	7.50	8.65	14.59	28.38	41.89	55.21	68.40	81.48	90.88	74.38	62.34	53.22	46.13	40.49	32.13	26.30	22.04	18.82	16.31	0.00	0.00	0.00	0.00	
20	1.68	4.06	7.89	9.10	15.36	29.88	44.09	58.12	72.00	85.77	98.15	80.33	67.32	57.48	49.82	43.73	34.70	28.40	23.80	20.32	7.77	0.00	0.00	0.00	0.00	
21	1.77	4.26	8.29	9.56	16.13	31.37	46.30	61.02	75.60	90.06	104.43	86.43	72.43	61.85	53.61	47.05	37.33	30.56	25.61	21.87	0.00	0.00	0.00	0.00	0.00	
22	1.85	4.46	8.68	10.01	16.89	32.86	48.50	63.93	79.20	94.35	109.40	92.68	77.67	66.31	57.48	50.45	40.03	32.77	27.46	21.67	0.00	0.00	0.00	0.00	0.00	
23	1.94	4.67	9.08	10.47	17.66	34.36	50.71	66.83	82.80	98.64	114.37	99.07	83.02	70.89	61.44	53.93	42.79	35.03	29.35	2.94	0.00	0.00	0.00	0.00	0.00	
24	2.02	4.87	9.47	10.92	18.43	35.85	52.91	69.74	86.40	102.93	119.34	105.60	88.50	75.56	65.49	57.48	45.61	37.33	31.29	0.00	0.00	0.00	0.00	0.00	0.00	
25	2.10	5.07	9.87	11.38	19.20	37.34	55.12	72.65	90.00	107.22	124.32	112.27	94.09	80.33	69.63	61.11	48.49	39.69	29.68	0.00	0.00	0.00	0.00	0.00	0.00	
26	2.19	5.28	10.26	11.83	19.97	38.84	57.32	75.55	93.60	111.51	129.29	119.07	99.79	85.20	73.85	64.81	51.43	42.10	11.58	0.00	0.00	0.00	0.00	0.00	0.00	
28	2.36	5.68	11.05	12.75	21.50	41.83	61.73	81.36	100.80	120.08	139.24	133.07	111.52	95.22	82.53	72.43	57.48	47.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
30	2.53	6.09	11.84	13.66	23.04	44.81	66.14	87.18	108.00	128.66	149.18	147.58	123.68	105.60	91.53	80.33	63.75	19.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
32	2.69	6.49	12.63	14.57	24.57	47.80	70.55	92.99	115.20	137.24	159.13	162.58	136.25	116.33	100.84	88.50	70.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
35	2.95	7.10	13.82	15.93	26.88	52.28	77.16	101.71	126.00	150.10	174.04	185.97	155.85	133.07	115.34	101.23	33.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
40	3.37	8.12	15.79	18.21	30.72	59.75	88.18	116.23	144.00	171.55	198.91	226.11	190.42	162.58	140.92	82.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	3.79	9.13	17.76	20.48	34.55	67.22	99.21	130.76	162.00	192.99	223.77	254.38	227.21	194.00	85.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

NOTES:

- (1) Type A: Manual or drip lubrication
 (2) Type B: Bath or disc lubrication
 (3) Type C: Oil stream lubrication

Table A-4 Horsepower Ratings, Single-Strand Roller Chain No. 120HE (1.500 in. Pitch)

No. of Teeth	Small Sprocket Speed, Revolutions/min																								Type A [Note (1)]			Type B [Note (2)]			Type C [Note (3)]		
	5	10	25	50	75	100	150	200	300	400	500	600	700	800	900	1,000	1,200	1,400	1,600	1,800	2,000	2,200	2,400	2,700									
11	0.79	1.54	3.72	7.23	10.67	14.06	20.76	27.36	40.38	53.22	65.93	58.37	46.32	37.91	31.77	27.13	20.64	16.38	13.40	11.23	9.59	8.31	7.30	6.11	0.00	0.00							
12	0.86	1.68	4.05	7.89	11.64	15.34	22.64	29.83	44.05	58.06	71.93	66.51	52.78	43.20	36.20	30.91	23.51	18.66	15.27	12.80	10.93	9.47	8.31	1.06	0.00	0.00							
13	0.94	1.82	4.39	8.54	12.61	16.62	24.53	32.33	47.72	62.90	77.92	74.99	59.51	48.71	40.82	34.85	26.51	21.04	17.22	14.43	12.32	10.68	9.37	0.00	0.00	0.00							
14	1.01	1.96	4.73	9.20	13.58	17.90	26.42	34.82	51.39	67.73	83.92	83.81	66.51	54.44	45.62	38.95	29.63	23.51	19.25	16.13	13.77	11.94	4.55	0.00	0.00	0.00							
15	1.08	2.10	5.07	9.86	14.55	19.18	28.30	37.31	55.06	72.57	89.91	92.95	73.76	60.37	50.59	43.20	32.86	26.08	21.34	17.89	15.27	13.24	0.00	0.00	0.00	0.00							
16	1.15	2.24	5.41	10.52	15.52	20.46	30.19	39.79	58.73	77.41	95.90	102.39	81.26	66.51	55.74	47.59	36.20	28.73	23.51	19.71	16.83	0.00	0.00	0.00	0.00	0.00							
17	1.23	2.38	5.74	11.17	16.49	21.73	32.08	42.28	62.40	82.25	101.90	112.14	88.99	72.84	61.04	52.12	39.65	31.46	25.75	21.58	18.43	0.00	0.00	0.00	0.00	0.00							
18	1.30	2.52	6.08	11.83	17.46	23.01	33.96	44.77	66.07	87.09	107.89	122.18	96.96	79.36	66.51	56.78	43.20	34.28	28.06	23.51	4.23	0.00	0.00	0.00	0.00	0.00							
19	1.37	2.66	6.42	12.49	18.43	24.29	35.85	47.26	69.74	91.93	113.89	132.50	105.15	86.06	72.13	61.58	46.85	37.18	30.43	25.50	0.00	0.00	0.00	0.00	0.00	0.00							
20	1.44	2.80	6.76	13.14	19.40	25.57	37.74	49.74	73.41	96.76	119.88	142.81	113.56	92.95	77.89	66.51	50.59	40.15	32.86	24.58	0.00	0.00	0.00	0.00	0.00	0.00							
21	1.51	2.94	7.09	13.80	20.37	26.85	39.63	52.23	77.08	101.60	125.87	149.95	122.18	100.00	83.81	71.56	54.44	43.20	35.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
22	1.59	3.08	7.43	14.46	21.34	28.13	41.51	54.72	80.75	106.44	131.87	157.09	131.01	107.23	89.87	76.73	58.37	46.32	37.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
23	1.66	3.22	7.77	15.12	22.31	29.41	43.40	57.20	84.42	111.28	137.86	164.23	140.04	114.62	96.06	82.02	62.39	49.51	38.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
24	1.73	3.36	8.11	15.77	23.28	30.68	45.29	59.69	88.10	116.12	143.86	171.37	149.28	122.18	102.39	87.43	66.51	52.78	12.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
25	1.80	3.50	8.45	16.43	24.25	31.96	47.17	62.18	91.77	120.96	149.85	178.51	158.70	129.90	108.86	92.95	70.71	56.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
26	1.87	3.64	8.78	17.09	25.22	33.24	49.06	64.66	95.44	125.79	155.84	185.65	168.32	137.77	115.46	98.58	74.99	59.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
28	2.02	3.93	9.46	18.40	27.16	35.80	52.83	69.64	102.78	135.47	167.83	199.94	188.11	153.97	129.03	110.17	83.81	30.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
30	2.16	4.21	10.14	19.72	29.10	38.36	56.61	74.61	110.12	145.15	179.82	214.22	208.62	170.75	143.10	122.18	92.95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
32	2.31	4.49	10.81	21.03	31.04	40.91	60.38	79.59	117.46	154.82	191.81	228.50	229.83	188.11	157.65	134.60	88.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
35	2.52	4.91	11.82	23.00	33.95	44.75	66.04	87.05	128.47	169.34	209.79	249.92	262.89	215.17	180.33	153.97	12.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
40	2.88	5.61	13.51	26.29	38.80	51.14	75.48	99.48	146.83	193.53	239.76	285.62	321.19	262.89	220.37	118.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
45	3.24	6.31	15.20	29.58	43.65	57.53	84.91	111.92	165.18	217.72	269.73	321.32	372.57	278.98	148.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
Type A [Note (1)]			Type B [Note (2)]																		Type C [Note (3)]												

NOTES:

- (1) Type A: Manual or drip lubrication
 (2) Type B: Bath or disc lubrication
 (3) Type C: Oil stream lubrication

Table A-5 Horsepower Ratings, Single-Strand Roller Chain No. 140HE (1.750 in. Pitch)

No. of Teeth	Small Sprocket Speed, Revolutions/min																									Type B [Note (2)]			Type C [Note (3)]		
	5	10	25	44	50	75	100	150	200	300	400	500	600	700	800	900	1,000	1,200	1,400	1,600	1,800	2,000	2,200	2,400	2,700						
11	1.21	2.36	5.69	9.79	11.07	16.34	21.54	31.79	41.90	61.84	81.50	86.80	66.03	52.40	42.89	35.94	30.69	23.35	18.53	15.16	12.71	10.85	9.40	8.25	0.00						
12	1.32	2.58	6.21	10.68	12.08	17.83	23.50	34.68	46.71	67.46	88.91	98.90	75.24	59.70	48.87	40.95	34.97	26.60	21.11	17.28	14.48	12.36	10.72	0.00							
13	1.43	2.79	6.73	11.57	13.08	19.31	25.45	37.57	49.52	73.08	96.32	111.52	84.83	67.32	55.10	46.18	39.43	29.99	23.80	19.48	16.33	13.94	0.00								
14	1.55	3.01	7.24	12.46	14.09	20.80	27.41	40.46	53.32	78.70	103.73	124.63	94.81	75.24	61.58	51.61	44.06	33.52	26.60	21.77	18.25	15.58	0.00								
15	1.66	3.22	7.76	13.35	15.10	22.28	29.37	43.35	57.13	84.32	111.14	137.69	105.15	83.44	68.29	57.23	48.87	37.17	29.50	24.15	20.24	0.00									
16	1.77	3.44	8.28	14.24	16.10	23.77	31.33	46.24	60.94	89.94	118.55	146.87	115.83	91.92	75.24	63.05	53.83	40.95	32.50	26.60	22.29	0.00									
17	1.88	3.65	8.80	15.13	17.11	25.25	33.29	49.13	64.75	95.56	125.96	156.05	126.86	100.67	82.40	69.05	58.96	44.85	35.59	29.13	0.00										
18	1.99	3.86	9.31	16.02	18.12	26.74	35.24	52.02	68.56	101.19	133.37	165.23	138.22	109.68	89.77	75.24	64.24	48.87	38.78	31.74	0.00										
19	2.10	4.08	9.83	16.92	19.12	28.22	37.20	54.90	72.37	106.81	140.78	174.41	149.89	118.95	97.36	81.59	69.66	53.00	42.06	33.55	0.00										
20	2.21	4.29	10.35	17.81	20.13	29.71	39.16	57.79	76.18	112.43	148.19	183.59	161.88	128.46	105.15	88.12	75.24	57.23	45.42	0.00											
21	2.32	4.51	10.87	18.70	21.14	31.20	41.12	60.68	79.99	118.05	155.60	192.77	174.17	138.22	113.13	94.81	80.95	61.58	48.87	0.00											
22	2.43	4.72	11.38	19.59	22.14	32.68	43.08	63.57	83.80	123.67	163.01	201.95	186.76	148.21	121.30	101.66	86.80	66.03	52.40	0.00											
23	2.54	4.94	11.90	20.48	23.15	34.17	45.03	66.46	87.60	129.29	170.42	211.13	199.64	158.43	129.67	108.67	92.78	70.58	29.48	0.00											
24	2.65	5.15	12.42	21.37	24.16	35.65	46.99	69.35	91.41	134.91	177.83	220.31	212.80	168.87	138.22	115.83	98.90	75.24	0.00												
25	2.76	5.37	12.94	22.26	25.16	37.14	48.95	72.24	95.22	140.54	185.24	229.49	226.24	179.53	146.94	123.15	105.15	79.99	0.00												
26	2.87	5.58	13.45	23.15	26.17	38.62	50.91	75.13	99.03	146.16	192.65	238.67	239.95	190.41	155.85	130.61	111.52	84.83	0.00												
28	3.09	6.01	14.49	24.93	28.18	41.59	54.82	80.91	106.65	157.40	207.47	257.03	268.16	212.80	174.17	145.97	124.63	41.32	0.00												
30	3.31	6.44	15.52	26.71	30.20	44.56	58.74	86.69	114.27	168.64	222.28	275.39	297.40	236.00	193.16	161.88	138.22	0.00													
32	3.53	6.87	16.56	28.49	32.21	47.54	62.66	92.47	121.88	179.89	237.10	293.74	327.63	259.99	212.80	178.34	152.27	0.00													
35	3.86	7.51	18.11	31.16	35.23	51.99	68.53	101.14	133.31	196.75	259.33	321.28	374.76	297.40	243.41	203.99	66.13	0.00													
40	4.41	8.59	20.70	35.61	40.26	59.42	78.32	115.59	152.36	224.86	296.38	367.18	437.42	363.35	264.26	74.76	0.00														
45	4.97	9.66	23.28	40.06	45.29	66.85	88.11	130.04	171.40	252.96	333.43	413.08	492.09	352.89	132.45	0.00															
Type A [Note (1)]											Type B [Note (2)]										Type C [Note (3)]										

NOTES:

- (1) Type A: Manual or drip lubrication
 (2) Type B: Bath or disc lubrication
 (3) Type C: Oil stream lubrication

Table A-6 Horsepower Ratings, Single-Strand Roller Chain No. 160HE (2,000 in. Pitch)

No. of Teeth	Small Sprocket Speed, Revolutions/min																								
	2	5	10	25	40	50	75	100	150	200	300	400	500	600	700	800	900	1,000	1,100	1,200	1,400	1,600	1,800	2,000	2,200
11	0.73	1.75	3.40	8.19	12.86	15.94	23.52	31.00	45.75	60.31	89.00	117.32	96.58	73.47	58.31	47.72	39.99	34.15	29.60	25.98	20.61	16.87	14.14	12.07	0.00
12	0.79	1.91	3.71	8.94	14.03	17.39	25.66	33.82	49.91	65.79	97.10	127.98	110.05	83.72	66.44	54.38	45.57	38.91	33.73	29.60	23.49	19.22	16.11	12.02	0.00
13	0.86	2.07	4.02	9.68	15.20	18.83	27.80	36.64	54.07	71.27	105.19	138.65	124.09	94.40	74.91	61.31	51.38	43.87	38.03	33.37	26.48	21.68	18.17	0.00	0.00
14	0.92	2.22	4.33	10.43	16.37	20.28	29.93	39.46	58.23	76.75	113.28	149.31	138.68	105.50	83.72	68.52	57.43	49.03	42.50	37.30	29.60	24.23	8.08	0.00	0.00
15	0.99	2.38	4.64	11.17	17.54	21.73	32.07	42.27	62.39	82.24	121.37	159.98	153.80	117.00	92.85	75.99	63.69	54.38	47.13	41.37	32.83	26.87	0.00	0.00	0.00
16	1.05	2.54	4.94	11.92	18.71	23.18	34.21	45.09	66.55	87.72	129.46	170.64	169.43	128.89	102.28	83.72	70.16	59.90	51.92	45.57	36.16	29.60	0.00	0.00	0.00
17	1.12	2.70	5.25	12.66	19.88	24.63	36.35	47.91	70.71	93.20	137.55	181.31	185.56	141.16	112.02	91.69	76.84	65.61	56.87	49.91	39.61	0.00	0.00	0.00	0.00
18	1.19	2.86	5.56	13.41	21.05	26.08	38.49	50.73	74.87	98.68	145.64	191.97	202.17	153.80	122.05	99.90	83.72	71.48	61.96	54.38	43.15	0.00	0.00	0.00	0.00
19	1.25	3.02	5.87	14.15	22.22	27.53	40.63	53.55	79.03	104.17	153.74	202.64	219.25	166.79	132.36	108.33	90.79	77.52	67.19	58.97	43.82	0.00	0.00	0.00	0.00
20	1.32	3.18	6.18	14.89	23.39	28.98	42.76	56.37	83.19	109.65	161.83	213.30	236.79	180.13	142.95	117.00	98.05	83.72	72.57	63.69	0.00	0.00	0.00	0.00	0.00
21	1.38	3.34	6.49	15.64	24.56	30.42	44.90	59.18	87.35	115.13	169.92	223.97	254.77	193.81	153.80	125.88	105.50	90.07	78.08	68.52	0.00	0.00	0.00	0.00	0.00
22	1.45	3.49	6.80	16.38	25.73	31.87	47.04	62.00	91.51	120.61	178.01	234.63	273.18	207.82	164.91	134.98	113.12	96.58	83.72	73.47	0.00	0.00	0.00	0.00	0.00
23	1.52	3.65	7.11	17.13	26.90	33.32	49.18	64.82	95.67	126.10	186.10	245.30	292.02	222.15	176.29	144.29	120.92	103.24	89.49	68.24	0.00	0.00	0.00	0.00	0.00
24	1.58	3.81	7.42	17.87	28.07	34.77	51.32	67.64	99.83	131.58	194.19	255.96	311.27	236.79	187.91	153.80	128.89	110.05	95.39	21.76	0.00	0.00	0.00	0.00	0.00
25	1.65	3.97	7.73	18.62	29.23	36.22	53.45	70.46	103.99	137.06	202.28	266.63	330.32	251.74	199.77	163.51	137.03	117.00	101.41	0.00	0.00	0.00	0.00	0.00	0.00
26	1.71	4.13	8.03	19.36	30.40	37.67	55.59	73.28	108.14	142.54	210.37	277.29	343.53	267.00	211.88	173.42	145.33	124.09	67.09	0.00	0.00	0.00	0.00	0.00	0.00
28	1.85	4.45	8.65	20.85	32.74	40.57	59.87	78.91	116.46	153.51	226.56	298.62	369.96	298.39	236.79	193.81	162.42	135.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	1.98	4.77	9.27	22.34	35.08	43.46	64.15	84.55	124.78	164.47	242.74	319.95	396.38	330.97	262.61	214.94	180.13	49.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00
32	2.11	5.08	9.89	23.83	37.42	46.36	68.42	90.18	133.10	175.44	258.92	341.28	422.81	364.56	289.30	236.79	157.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	2.31	5.56	10.82	26.07	40.93	50.71	74.84	98.64	145.58	191.88	283.20	373.28	462.45	417.01	330.92	270.86	22.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	2.64	6.35	12.36	29.79	46.78	57.95	85.53	112.73	166.38	219.30	323.65	426.60	528.51	509.49	345.15	57.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	2.97	7.15	13.91	33.51	52.62	65.19	96.22	126.82	187.17	246.71	364.11	479.93	594.58	495.96	173.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Type A [Note (1)]												Type B [Note (2)]												Type C [Note (3)]	

NOTES:

- (1) Type A: Manual or drip lubrication
- (2) Type B: Bath or disc lubrication
- (3) Type C: Oil stream lubrication

Table A-7 Horsepower Ratings, Single-Strand Roller Chain No. 180HE (2.250 in. Pitch)

No. of Teeth	Small Sprocket Speed, Revolutions/min																							
	2	5	10	25	37	50	75	100	150	200	300	400	500	600	700	800	900	1,000	1,100	1,200	1,400	1,600	1,800	2,000
11	0.99	2.40	4.66	11.24	16.38	21.87	32.27	42.54	62.78	82.75	122.13	148.32	106.13	80.73	64.07	52.44	43.95	37.52	32.52	28.54	22.65	18.54	15.54	0.00
12	1.09	2.62	5.09	12.26	17.87	23.86	35.21	46.41	68.49	90.28	133.24	169.00	120.92	91.99	73.00	59.75	50.07	42.75	37.06	32.52	25.81	21.12	2.40	0.00
13	1.18	2.83	5.51	13.29	19.36	25.84	38.14	50.28	74.20	97.80	144.34	190.25	136.35	103.72	82.31	67.37	56.46	48.21	41.79	36.67	29.10	23.82	0.00	0.00
14	1.27	3.05	5.94	14.31	20.85	27.83	41.08	54.14	79.91	105.32	155.44	204.89	152.38	115.92	91.99	75.29	63.10	53.87	46.70	40.98	32.52	10.23	0.00	0.00
15	1.36	3.27	6.36	15.33	22.33	29.82	44.01	58.01	85.61	112.85	166.55	219.52	169.00	128.56	102.02	83.50	69.98	59.75	51.79	45.45	36.07	0.00	0.00	0.00
16	1.45	3.49	6.78	16.35	23.82	31.81	46.94	61.88	91.32	120.37	177.65	234.16	186.17	141.63	112.39	91.99	77.09	65.82	57.05	50.07	39.74	0.00	0.00	0.00
17	1.54	3.71	7.21	17.37	25.31	33.80	49.88	65.74	97.03	127.89	188.75	248.79	203.90	155.11	123.09	100.75	84.43	72.09	62.49	54.84	0.00	0.00	0.00	0.00
18	1.63	3.92	7.63	18.40	26.80	35.78	52.81	69.61	102.74	135.42	199.86	263.43	222.15	169.00	134.11	109.77	91.99	78.54	68.08	59.75	0.00	0.00	0.00	0.00
19	1.72	4.14	8.06	19.42	28.29	37.77	55.75	73.48	108.45	142.94	210.96	278.06	240.92	183.27	145.44	119.04	99.76	85.18	73.83	64.80	0.00	0.00	0.00	0.00
20	1.81	4.36	8.48	20.44	29.78	39.76	58.68	77.35	114.15	150.46	222.06	292.70	260.19	197.93	157.07	128.56	107.74	91.99	79.74	55.31	0.00	0.00	0.00	0.00
21	1.90	4.58	8.90	21.46	31.27	41.75	61.62	81.21	119.86	157.99	233.17	307.33	279.94	212.96	169.00	138.32	115.92	98.97	85.79	0.00	0.00	0.00	0.00	0.00
22	1.99	4.80	9.33	22.48	32.76	43.74	64.55	85.08	125.57	165.51	244.27	321.97	300.17	228.35	181.21	148.32	124.30	106.13	87.35	0.00	0.00	0.00	0.00	0.00
23	2.08	5.01	9.75	23.50	34.25	45.72	67.48	88.95	131.28	173.03	255.37	336.60	320.87	244.10	193.70	158.54	132.87	113.45	29.32	0.00	0.00	0.00	0.00	0.00
24	2.17	5.23	10.18	24.53	35.74	47.71	70.42	92.82	136.98	180.56	266.48	351.24	342.02	260.19	206.47	169.00	141.63	120.92	0.00	0.00	0.00	0.00	0.00	0.00
25	2.26	5.45	10.60	25.55	37.22	49.70	73.35	96.68	142.69	188.08	277.58	365.87	363.62	276.62	219.51	179.67	150.57	96.16	0.00	0.00	0.00	0.00	0.00	0.00
26	2.35	5.67	11.03	26.57	38.71	51.69	76.29	100.55	148.40	195.60	288.68	380.51	385.66	295.38	232.81	190.55	159.69	37.53	0.00	0.00	0.00	0.00	0.00	0.00
28	2.53	6.10	11.87	28.61	41.69	55.66	82.15	108.28	159.81	210.65	310.89	409.77	431.00	327.87	260.19	212.96	146.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	2.71	6.54	12.72	30.66	44.67	59.64	88.02	116.02	171.23	225.69	333.09	439.04	477.99	363.62	288.56	236.18	30.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00
32	2.89	6.98	13.57	32.70	47.65	63.62	93.89	123.75	182.64	240.74	355.30	468.31	526.58	400.58	317.89	199.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	3.17	7.63	14.84	35.77	52.11	69.58	102.69	135.36	199.77	263.31	388.61	512.22	602.34	458.22	363.62	28.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	3.62	8.72	16.96	40.88	59.56	79.52	117.36	154.69	228.31	300.93	444.13	585.39	725.24	559.83	123.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	4.07	9.81	19.08	45.99	67.00	89.46	132.03	174.03	256.84	338.54	499.64	658.57	750.00	333.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Type A [Note (1)]				Type B [Note (2)]																Type C [Note (3)]				

NOTES:

- (1) Type A: Manual or drip lubrication
 (2) Type B: Bath or disc lubrication
 (3) Type C: Oil stream lubrication

Table A-8 Horsepower Ratings, Single-Strand Roller Chain No. 200HE (2.500 in. Pitch)

No. of Teeth	Small Sprocket Speed, Revolutions/min																								Type B [Note (2)]			Type C [Note (3)]		
	2	5	10	25	33	50	75	100	150	200	250	300	400	500	600	700	800	900	1,000	1,100	1,200	1,400	1,600	1,800						
11	1.37	3.31	6.44	15.51	20.25	30.17	44.53	58.70	86.63	114.18	141.46	168.52	161.36	115.46	87.83	69.70	57.05	47.81	40.82	35.38	31.05	24.64	20.17	0.00						
12	1.50	3.61	7.02	16.92	22.09	32.92	48.58	64.03	94.51	124.57	154.32	183.84	183.86	131.56	100.08	79.42	65.00	54.48	46.51	40.32	35.38	28.08	18.78	0.00						
13	1.62	3.91	7.61	18.33	23.93	35.66	52.63	69.37	102.38	134.95	167.18	199.16	207.31	148.34	112.85	89.55	73.30	61.43	52.45	45.46	39.90	31.66	0.00	0.00						
14	1.75	4.21	8.19	19.74	25.77	38.40	56.68	74.71	110.26	145.33	180.04	214.48	231.69	165.78	126.11	100.08	81.91	68.65	58.61	50.80	44.59	35.38	0.00	0.00						
15	1.87	4.51	8.78	21.15	27.61	41.15	60.73	80.04	118.13	155.71	192.90	229.80	256.95	183.86	139.87	110.99	90.85	76.13	65.00	56.34	49.45	0.00	0.00	0.00						
16	2.00	4.81	9.36	22.56	29.45	43.89	64.77	85.38	126.01	166.09	205.76	245.12	283.07	202.55	154.08	122.27	100.08	83.87	71.61	62.07	54.48	0.00	0.00	0.00						
17	2.12	5.11	9.95	23.97	31.29	46.63	68.82	90.71	133.88	176.47	218.62	260.44	310.02	221.83	168.75	133.91	109.61	91.86	78.43	67.98	59.66	0.00	0.00	0.00						
18	2.25	5.41	10.53	25.38	33.13	49.38	72.87	96.05	141.76	186.85	231.48	275.76	337.77	241.69	183.86	145.90	119.42	100.08	85.45	74.07	11.75	0.00	0.00	0.00						
19	2.37	5.71	11.12	26.79	34.97	52.12	76.92	101.39	149.63	197.23	244.35	291.08	366.30	262.11	199.39	158.23	129.51	108.53	92.67	80.32	0.00	0.00	0.00	0.00						
20	2.50	6.02	11.70	28.20	36.82	54.86	80.97	106.72	157.51	207.61	257.21	306.50	395.60	283.07	215.34	170.88	139.87	117.21	100.08	31.07	0.00	0.00	0.00	0.00						
21	2.62	6.32	12.29	29.61	38.66	57.60	85.02	112.06	165.38	217.99	270.07	321.72	425.64	304.56	231.69	183.86	150.49	126.11	107.68	0.00	0.00	0.00	0.00	0.00						
22	2.75	6.62	12.87	31.02	40.50	60.35	89.07	117.40	173.26	228.37	282.93	337.04	456.40	326.57	248.43	197.15	161.36	135.23	86.70	0.00	0.00	0.00	0.00	0.00						
23	2.87	6.92	13.46	32.43	42.34	63.09	93.11	122.73	181.14	238.75	295.79	352.36	464.44	349.09	265.56	210.74	172.49	144.55	11.76	0.00	0.00	0.00	0.00	0.00						
24	3.00	7.22	14.04	33.84	44.18	65.83	97.16	128.07	189.01	249.13	308.65	367.68	484.64	372.10	283.07	224.63	183.86	154.08	0.00	0.00	0.00	0.00	0.00	0.00						
25	3.12	7.52	14.63	35.25	46.02	68.58	101.21	133.40	196.89	259.51	321.51	383.00	504.83	395.60	300.94	238.82	195.47	118.72	0.00	0.00	0.00	0.00	0.00	0.00						
26	3.24	7.82	15.21	36.66	47.86	71.32	105.26	138.74	204.76	269.89	334.37	398.32	525.02	419.57	319.18	253.29	207.31	46.33	0.00	0.00	0.00	0.00	0.00	0.00						
Type A [Note (1)]				Type B [Note (2)]																			Type C [Note (3)]							

NOTES:

- (1) Type A: Manual or drip lubrication
 (2) Type B: Bath or disc lubrication
 (3) Type C: Oil stream lubrication

Table A-9 Horsepower Ratings, Single-Strand Roller Chain No. 240HE (3.000 in. Pitch)

No. of Teeth	Small Sprocket Speed, Revolutions/min																							
	2	5	10	25	27	50	75	100	150	200	250	300	400	500	600	700	800	900	1,000	1,100	1,200	1,300	1,400	1,500
11	2.33	5.62	10.93	26.33	28.35	51.23	75.60	99.65	147.07	193.85	240.16	286.10	186.70	133.59	101.63	80.65	66.01	55.32	47.23	40.94	35.93	31.87	28.51	0.00
12	2.54	6.13	11.92	28.73	30.93	55.88	82.48	108.71	160.44	211.48	262.00	312.11	212.73	152.22	115.80	91.89	75.21	63.03	53.82	46.65	40.94	36.31	0.00	0.00
13	2.75	6.64	12.91	31.12	33.51	60.54	89.35	117.77	173.81	229.10	283.83	338.12	239.87	171.64	130.57	103.61	84.81	71.07	60.68	52.60	46.16	0.00	0.00	0.00
14	2.97	7.15	13.91	33.52	36.09	65.20	96.22	126.83	187.18	246.72	305.66	364.13	268.07	191.82	145.92	115.80	94.78	79.43	67.82	58.78	18.18	0.00	0.00	0.00
15	3.18	7.66	14.90	35.91	38.66	69.85	103.10	135.89	200.55	264.35	327.50	390.14	297.30	212.73	161.83	128.42	105.11	88.09	75.21	65.19	0.00	0.00	0.00	0.00
16	3.39	8.17	15.89	38.30	41.24	74.51	109.97	144.95	213.92	281.97	349.33	416.15	327.52	234.35	178.28	141.47	115.80	97.04	82.86	0.00	0.00	0.00	0.00	0.00
17	3.60	8.68	16.89	40.70	43.82	79.17	116.84	154.01	227.29	299.59	371.16	442.16	358.70	256.66	195.25	154.94	126.82	106.28	90.74	0.00	0.00	0.00	0.00	0.00
18	3.81	9.19	17.88	43.09	46.40	83.83	123.72	163.07	240.66	317.21	392.99	468.17	390.81	279.64	212.73	168.81	138.17	115.80	16.92	0.00	0.00	0.00	0.00	0.00
19	4.03	9.70	18.87	45.48	48.97	88.48	130.59	172.13	254.03	334.84	414.83	494.78	423.82	303.26	230.70	183.08	149.84	125.58	0.00	0.00	0.00	0.00	0.00	0.00
20	4.24	10.21	19.87	47.88	51.55	93.14	137.46	181.18	267.40	352.46	436.66	520.19	457.72	327.52	249.15	197.72	161.83	98.33	0.00	0.00	0.00	0.00	0.00	0.00
21	4.45	10.72	20.86	50.27	54.13	97.80	144.33	190.24	280.78	370.08	458.49	546.19	492.48	352.39	268.07	212.73	174.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00
22	4.66	11.23	21.85	52.67	56.71	102.45	151.21	199.30	294.15	387.71	480.33	572.20	528.07	377.85	287.44	228.10	186.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00
23	4.87	11.74	22.85	55.06	59.28	107.11	158.08	208.36	307.52	405.33	502.16	598.21	564.48	403.91	307.26	243.83	153.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00
24	5.09	12.26	23.84	57.45	61.86	111.77	164.95	217.42	320.89	422.95	523.99	624.22	601.69	430.53	327.52	259.91	48.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	5.30	12.77	24.83	59.85	64.44	116.42	171.83	226.48	334.26	440.58	545.83	650.23	639.68	457.72	348.20	276.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
26	5.51	13.28	25.83	62.24	67.02	121.08	178.70	235.54	347.63	458.20	567.66	676.24	678.45	485.46	369.30	293.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Type A [Note (1)]					Type B [Note (2)]										Type C [Note (3)]									

NOTES:

- (1) Type A: Manual or drip lubrication
 (2) Type B: Bath or disc lubrication
 (3) Type C: Oil stream lubrication