



**International
Standard**

ISO 2407

**Test conditions for internal
cylindrical grinding machines with
horizontal spindle — Testing of
accuracy**

*Conditions d'essai des machines à rectifier les surfaces de
révolution intérieures à broche horizontale — Contrôle de
l'exactitude*

**Fourth edition
2024-08**

STANDARDSISO.COM : Click to view the full PDF of ISO 2407:2024

STANDARDSISO.COM : Click to view the full PDF of ISO 2407:2024



COPYRIGHT PROTECTED DOCUMENT

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Machine configurations	1
5 Preliminary remarks	3
5.1 Measuring units	3
5.2 Reference to ISO 230-1, ISO 230-2 and ISO 230-7	3
5.3 Machine levelling	3
5.4 Temperature conditions	3
5.5 Testing sequence	3
5.6 Tests to be performed	3
5.7 Measuring instruments	3
5.8 Software compensation	4
5.9 Machining tests	4
5.10 Minimum tolerance	4
5.11 Diagrams	4
6 Geometric tests	5
6.1 Linear axes motions	5
6.2 Workholding spindle	7
6.3 Wheel spindle	11
6.4 Facing wheelhead	14
7 Positioning tests	18
8 Machining tests	23
Annex A (informative) Error motions of axes of rotation	25
Annex B (informative) Terms in other languages	29
Bibliography	30

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 39, *Machine tools*, Subcommittee SC 2, *Test conditions for metal cutting machine tools*.

This fourth edition cancels and replaces the third edition (ISO 2407:1997), which has been technically revised. It also incorporates the Amendment ISO 2407:1997/Amd 1:2016. The main changes are as follows:

- references to ISO 230 series have been updated;
- tests for optional B1-axis have been added;
- a new [Annex A](#) has been added.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Test conditions for internal cylindrical grinding machines with horizontal spindle — Testing of accuracy

1 Scope

This document specifies, with reference to ISO 230-1, ISO 230-2 and ISO 230-7, geometric tests, positioning tests and machining tests on general purpose and normal accuracy internal cylindrical grinding machines with horizontal spindle, whether they are or are not fitted with a facing wheelhead slide. This document also specifies the applicable tolerances corresponding to the above-mentioned tests.

This document deals only with the verification of the accuracy; it applies neither to the testing of the machine operation (vibrations, abnormal noise, stick-slip motion of components, etc), nor to the checking of its characteristics (such as speeds, feeds), which are generally checked before the testing of the accuracy.

This document provides the terminology used for the principal components of the machine and the designation of the axes with reference to ISO 841.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 230-1:2012, *Test code for machine tools — Part 1: Geometric accuracy of machines operating under no-load or quasi-static conditions*

ISO 230-2:2014, *Test code for machine tools — Part 2: Determination of accuracy and repeatability of positioning of numerically controlled axes*

ISO 230-7:2015, *Test code for machine tools — Part 7: Geometric accuracy of axes of rotation*

3 Terms and definitions

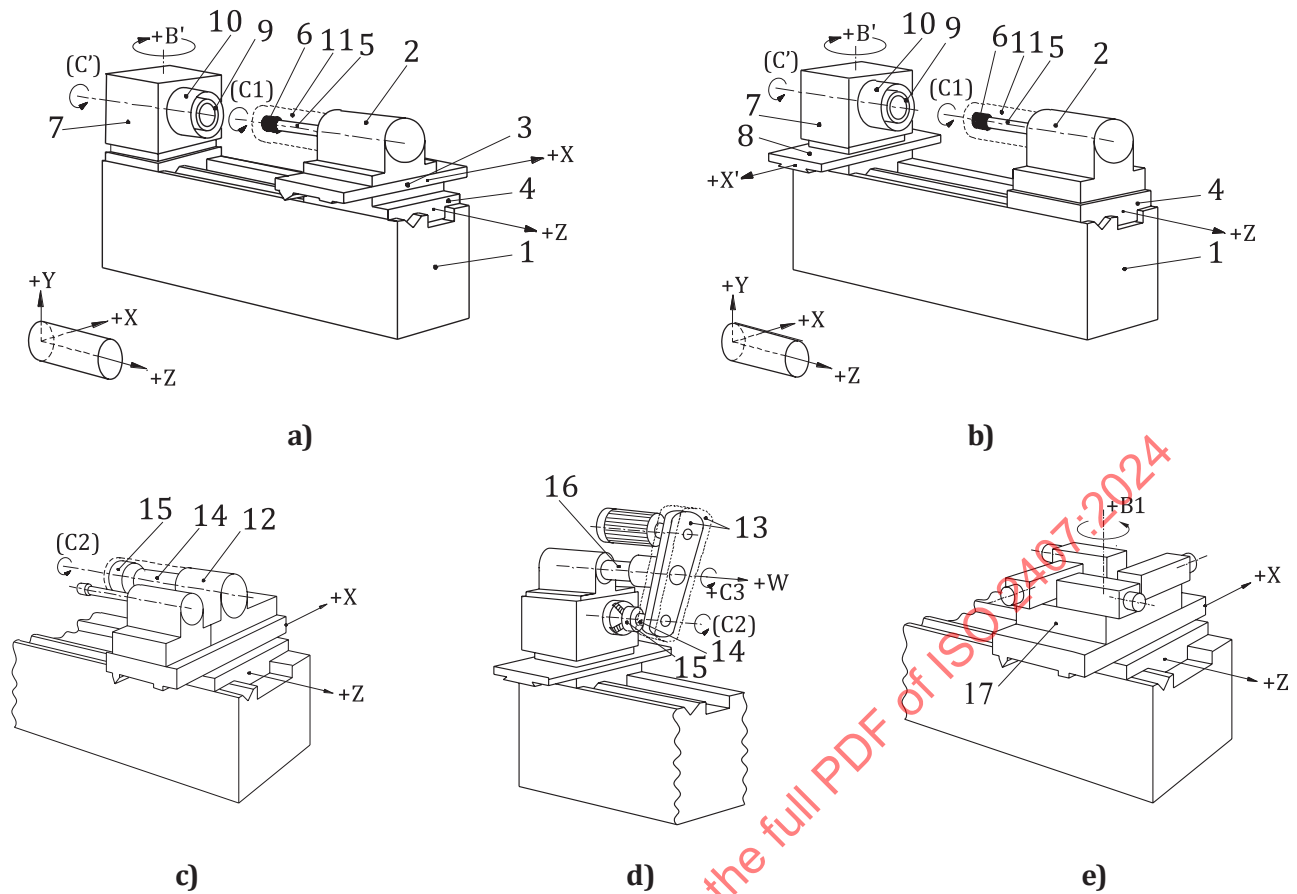
For the purposes of this document, the terms and definitions given in ISO 230-1, ISO 230-2 and ISO 230-7 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

4 Machine configurations

The common characteristic of all internal cylindrical grinding machines with horizontal spindle is that they have at least one horizontal workhead and one wheelhead on the bed and the spindles are facing each other. The workhead can swivel around a vertical axis (B'-axis) for grinding conical surfaces.



Key

1	bed	10	workpiece guard
2	wheelhead	11	wheel guard
3	wheelhead cross slide (X-axis)	12	facing wheelhead
4	wheelhead carriage (Z-axis)	13	swivel arm (with drive and guard) (C3-axis)
5	wheel spindle [(C1)-axis]	14	facing spindle [(C2)-axis]
6	internal grinding wheel	15	facing wheel
7	workhead (swivelling) [including B'-axis and (C')-axis]	16	facing wheel quill (W-axis)
8	workhead cross slide (X'-axis)	17	B1-axis
9	workholding spindle		

Figure 1 — Machine configurations

Depending upon the machine design, one of the two heads (workhead or wheelhead) can move along the X-axis. The wheelhead usually can move along the Z-axis [see [Figure 1](#) a) and b)].

In some cases, these machines are equipped with a facing wheel. This can be accomplished by means of the second wheelhead as shown in [Figure 1](#) c) or by an additional swivelling wheelhead attachment. This attachment is usually mounted on the workhead with a linear motion (W-axis) parallel to Z-axis and a swivelling motion (C3-axis) around the W-axis [see [Figure 1](#) d)].

In some cases, these machines are equipped with a B1-axis that is mounted on the wheelhead cross slide (X-axis) and allows a fast tool change (2 to 4 axes). In some machine tools, B1-axis is a contouring rotary axis [see [Figure 1](#) e)].

5 Preliminary remarks

5.1 Measuring units

In this document, all linear dimensions, deviations and corresponding tolerances are expressed in millimetres, angular dimensions are expressed in degrees, and angular deviations and the corresponding tolerances are expressed in ratios but in some cases microradians or arcseconds are used for clarification purposes. The equivalence of [Formula \(1\)](#) should always be kept in mind:

$$0,010/1\,000 = 10\,\mu\text{rad} \approx 2'' \quad (1)$$

5.2 Reference to ISO 230-1, ISO 230-2 and ISO 230-7

To apply this document, reference shall be made to ISO 230-1 when required, especially for the installation of the machine tool before testing, warming up of the spindle and other moving components, description of measuring methods and recommended accuracy of testing equipment.

In the “Observations” block of the tests described in [Clauses 6](#) and [7](#), the instructions are followed by a reference to the corresponding clauses of ISO 230-1, ISO 230-2 or ISO 230-7, in cases where the test concerned complies with the specifications of that part of the ISO 230 series.

5.3 Machine levelling

Prior to conducting tests on a machine tool, the machine tool should be levelled according to the recommendations of the supplier/manufacturer (see ISO 230-1:2012, 6.1).

5.4 Temperature conditions

The temperature conditions throughout the tests shall be specified by agreement between the manufacturer/supplier and the user.

5.5 Testing sequence

The sequence in which the tests are presented in this document in no way defines the practical order of testing. In order to make the mounting of instruments or measuring easier, tests may be performed in any order.

5.6 Tests to be performed

When testing a machine, it is not always necessary or possible to carry out all the tests described in this document. When the tests are required for acceptance purposes, it is up to the user to choose, in agreement with the supplier/manufacturer, those tests relating to the components and/or the properties of the machine which are of interest. These tests shall be clearly stated when ordering a machine. Mere reference to this document for the acceptance tests, without specifying the tests to be carried out and without agreement on the relevant expenses, cannot be considered as binding for any contracting party.

5.7 Measuring instruments

Measuring instruments indicated in the tests described in [Clauses 6](#) and [7](#) are examples only. Other instruments capable of measuring the same quantities and having the same, or a smaller, measurement uncertainty can be used. Reference shall be made to ISO 230-1:2012, Clause 5, which indicates the relationship between the measurement uncertainties and the tolerances.

When a “dial gauge” is referred to, it can mean not only dial test indicators (DTI), but any type of linear displacement sensor, such as analogue or digital dial gauges, linear variable differential transformer (LVDTs), linear scale displacement gauges, or non-contact sensors, when applicable to the test concerned.

Similarly, when a “straightedge” is referred to, it can mean any type of straightness reference artefact, such as a granite or ceramic or steel or cast-iron straightedge, one arm of a square, one generating line on a

cylindrical square, any straight path on a reference cube, or a special, dedicated artefact manufactured to fit in the T-slots or other references.

In the same way, when a “square” is mentioned, it can mean any type of squareness reference artefact, such as a granite or ceramic or steel or cast-iron square, a cylindrical square, a reference cube, or, again, a special, dedicated artefact.

When a “precision level” is referred to, it can mean any type of level such as bubble tube, digital and analogue electronic levels.

Valuable information on measuring instruments is available in ISO/TR 230-11.

5.8 Software compensation

When built-in software facilities are available for compensating geometric, positioning, contouring and thermal deviations, their use during these tests should be based on agreement between the manufacturer/supplier and the user, with due consideration to the machine tool intended use, e.g. if the intended use of the machine tool is with or without software compensation for geometric errors. When the software compensation is used, this shall be stated in the test report. It shall be noted that when software compensation is used, some machine tool axes cannot be locked for test purposes.

Valuable information on numerical compensation of geometric errors is available in ISO/TR 16907.

5.9 Machining tests

Machining tests shall be made with finishing cuts only, not with roughing cuts which are liable to generate appreciable cutting forces.

5.10 Minimum tolerance

By mutual agreement, the manufacturer/supplier and the user can establish the tolerance for a measuring length different from that given in the tests described in [Clauses 6](#) and [7](#). However, it shall be considered that the minimum value of tolerance is 0,005 mm unless otherwise specified.

When establishing the minimum tolerance, the measurement uncertainty associated with the test and the recommended instrument, shall be taken into account; see [5.7](#).

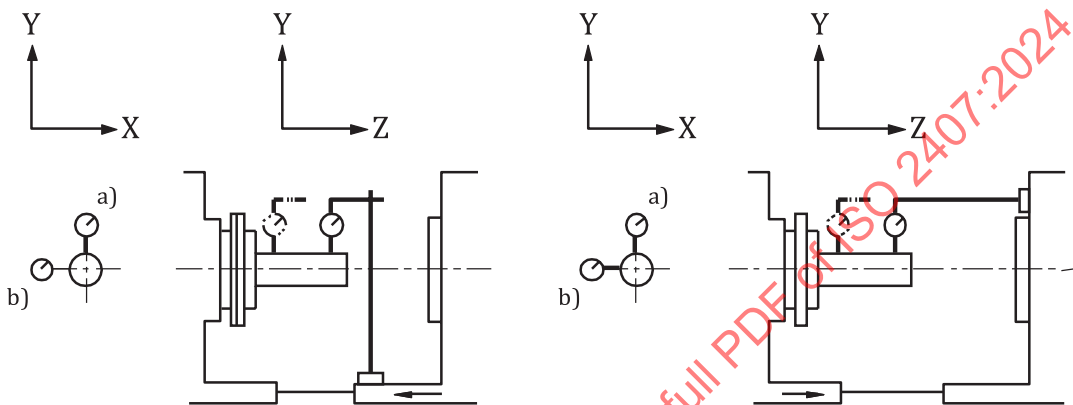
5.11 Diagrams

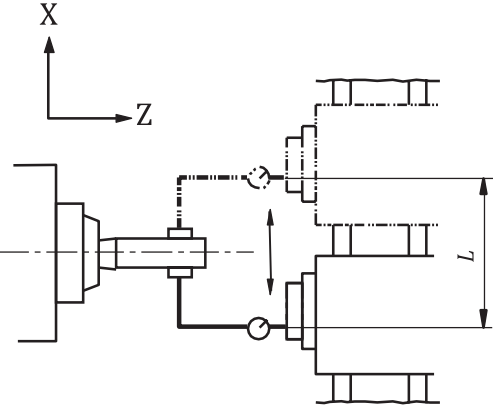
For reasons of simplicity, the diagrams in [Clauses 6](#) and [7](#) illustrate only one type of machine.

Where applicable, the diagram box provides, for each test a), b) and c) identified in the object box, a schematic representation of a possible test setup, including the identification of the relevant coordinate plane (e.g. XY, YZ, ZX).

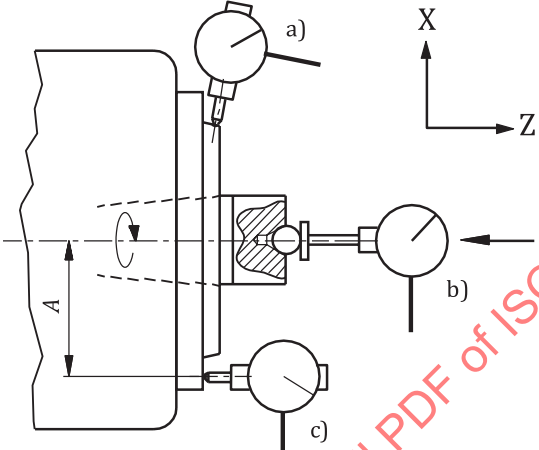
6 Geometric tests

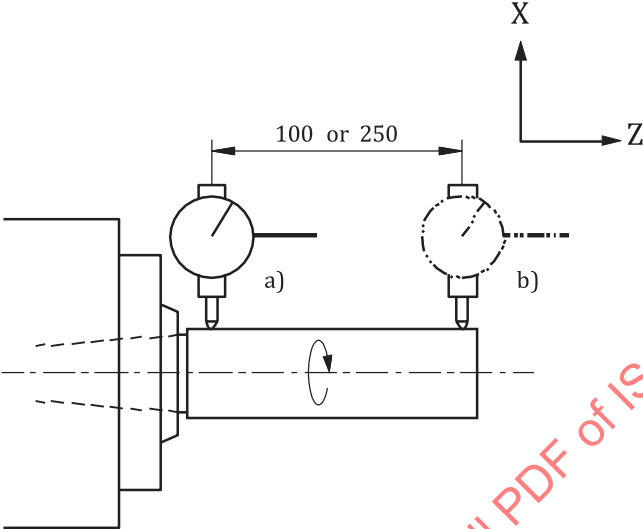
6.1 Linear axes motions

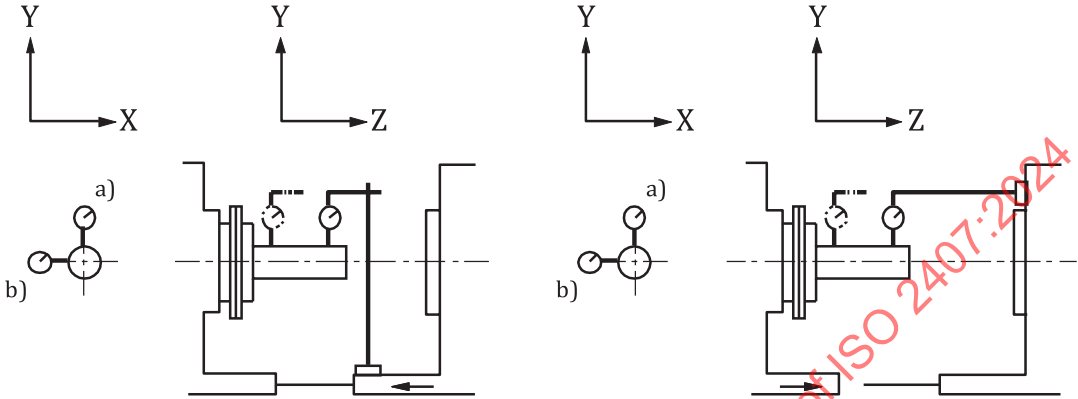
Object Checking of straightness of the wheelhead (or workhead) slide motion along the Z-axis: a) in the vertical plane, E_{YZ} ; b) in the horizontal plane, E_{XZ} .	G1
Diagram 	
Tolerance a) 0,015 for a measuring length of 250 b) 0,008 for a measuring length of 250	
Measurement results a) b)	
Measuring instruments Dial gauge and test mandrel or straightedge, or optical instruments	
Observations and reference to ISO 230-1:2012, 8.2 When a test mandrel is used, the dial gauge support shall be placed on the fixed part of the wheelhead and the test mandrel in the workholding spindle. When a straightedge is used, the dial gauge support shall be placed on a fixed part of the wheelhead, the stylus touching a straightedge laid approximately parallel to the Z-axis motion. When a straightedge is mounted on the workhead, its sag shall be taken into account. When a straightedge is used for long axes, it can be mounted on a fixed part of the machine (e.g. bed). In this case, differential straightness measurements shall be conducted, one with wheelhead motion and the other with workhead motion, without moving the straightedge between the two sets of measurements.	

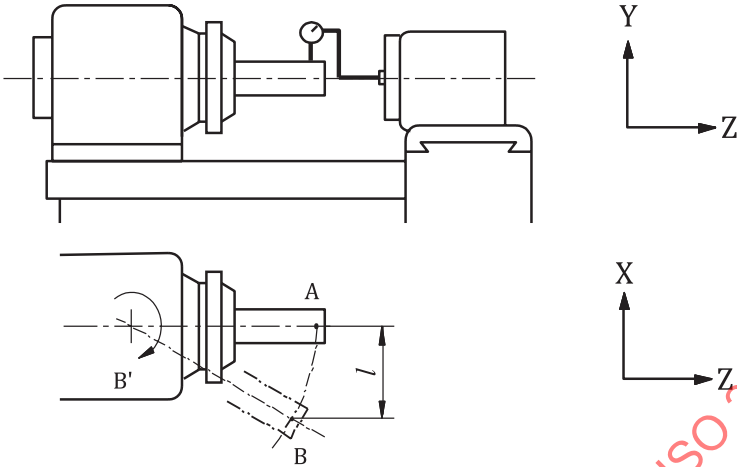
Object	G2
Checking of squareness of the motion of the wheelhead cross slide or workhead cross slide (X-axis) to the Z-axis motion, $E_{B(0Z)X}$.	
Diagram 	
Key L distance between the two points touched	
Tolerance $0,020/300$ ($0,066/1\ 000$) where 300 is the distance between the two points touched, L .	
Measurement results	
Measuring instruments Test mandrel and dial gauge support or optical instruments	
Observations and references to ISO 230-1:2012, 10.3.2 and 10.3.3 Set a test mandrel on the workholding spindle and adjust the workhead (B'-axis) so that the spindle axis is parallel to the Z-axis motion. Fix the dial gauge support on the test mandrel, with the stylus of the dial gauge touching a point of the wheel spindle. Turn the workholding spindle through 180° and move the X-axis until the stylus again touches the same point. The difference in the readings of the dial gauge divided by the distance, L , between the two points touched is the squareness error to be reported.	

6.2 Workholding spindle

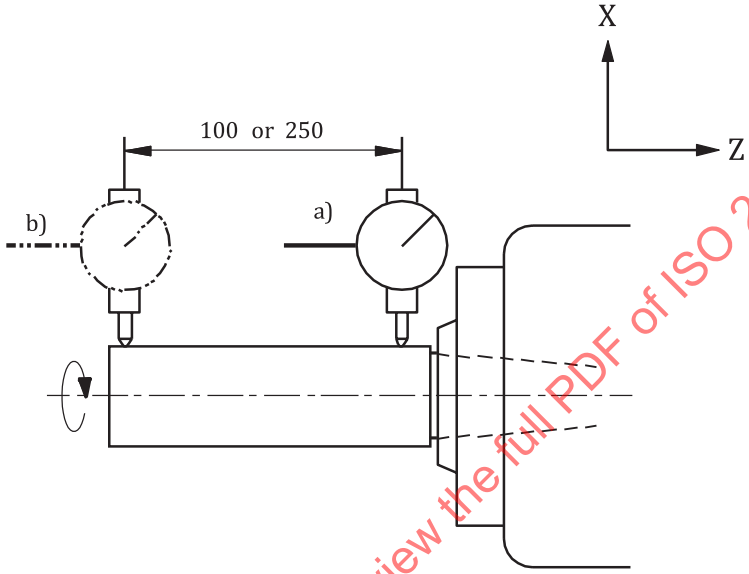
Object	G3
Checking of the workholding spindle rotation: a) run-out of the external centring surface; b) axial error motion, $E_{Z(C)}$; c) face run-out of the front resting surface.	
Diagram 	
Key A distance from the spindle axis F axial force	
Tolerance a) 0,005 b) 0,005 c) 0,010	
Measurement results a) b) c)	
Measuring instruments Dial gauge for a) and c) and dial gauge with flat-ended stylus tip for b)	
Observations and, for a) and c), reference to ISO 230-1:2012, 12.5; for b), reference to ISO 230-7:2015, 5.4.4 For a), in the case of a tapered spindle nose, the stylus of the dial gauge shall be set normal to the surface to be checked. For b), the value and the direction of the axial force, F , to be applied shall be specified by the supplier/man- ufacturer. Where preloaded thrust bearings are used, no force needs to be applied. For c), the distance, A , of the dial gauge from the spindle axis shall be as large as possible. See also test AR1 in Annex A .	

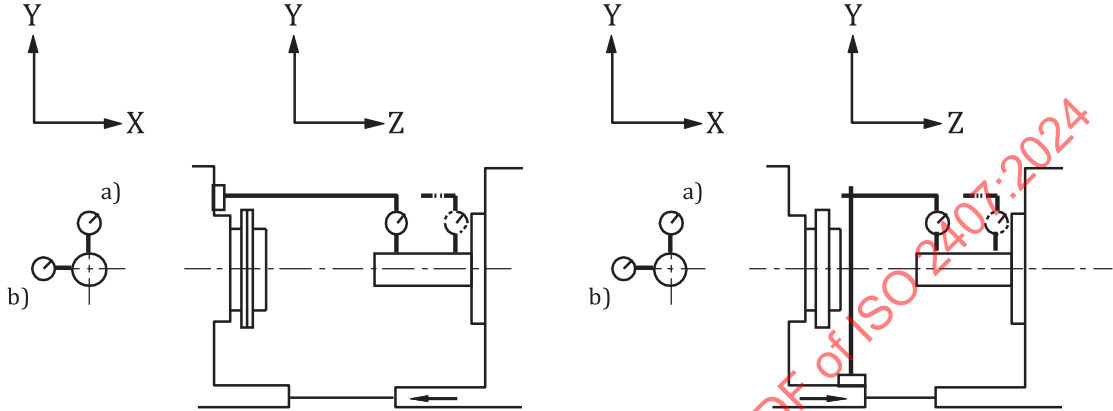
Object	G4
Checking of run-out of the internal taper of the workholding spindle: a) near the spindle nose; b) at a distance of 100 or 250.	
Diagram 	
Tolerance a) 0,005 b) 0,010 for a measuring distance of 100 0,015 for a measuring distance of 250	
Measurement results Measured distance: a) b)	
Measuring instruments Test mandrel and dial gauge	
Observations and reference to ISO 230-1:2012, 12.5 In the case of an internal taper, the test shall be made with the aid of a test mandrel.	

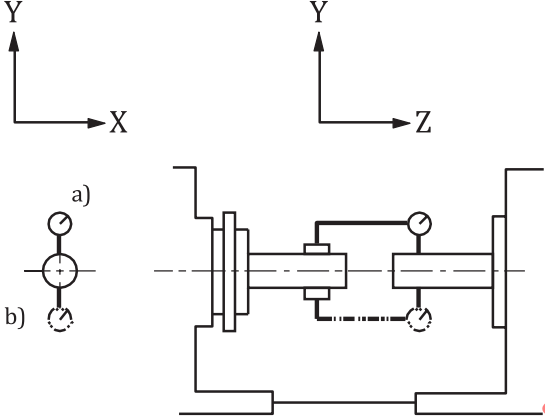
Object	G5
Checking of parallelism of the workholding spindle axis, (C'), to the Z-axis motion of the wheelhead (or of the workhead): a) in the vertical plane, $E_{A(0Z)(C')}$; b) in the horizontal plane, $E_{B(0Z)(C')}$.	
Diagram 	
Tolerance a) 0,008/100, 0,020/250 (0,080/1 000); test mandrel end directed upwards b) 0,003/100, 0,008/250 (0,032/1 000)	
Measurement results a) b)	
Measuring instruments Test mandrel and dial gauge or optical instruments	
Observations and reference to ISO 230-1:2012, 12.5 The checking shall be done first at one angular position of the workholding spindle and then repeated after rotating the spindle through 180°. Mean values shall be taken at each measuring point in order to evaluate the parallelism error.	

Object	G6
Checking of parallelism of the workhead swivelling plane to the X-axis.	
Diagram 	
Key l difference in X-axis positions between measuring points A and B (highest points on the test mandrel)	
Tolerance 0,010/100 (0,100/1 000)	
Measurement results	
Measuring instruments Test mandrel and dial gauge	
Observations and reference to ISO 230-1:2012, 12.3.3.2 A reading shall be taken when the workhead is locked in position A. Swivel the workhead towards its external position B and touch the stylus of the dial gauge to the same point of the test mandrel as in position A, moving the cross slide and the Z-axis. The difference between the readings at positions A and B, divided by the distance, l , is the value to be reported.	

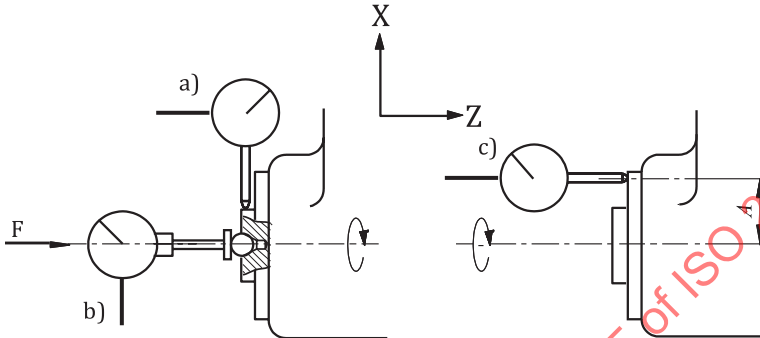
6.3 Wheel spindle

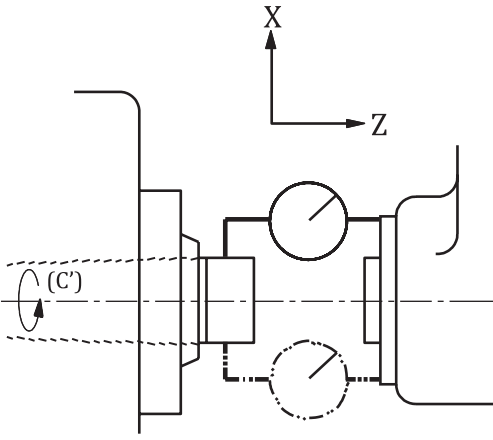
Object	G7
Checking of run-out of internal taper of the wheel spindle (wheel mounting diameter): a) near the spindle nose; b) at a distance of 100 or 250. This test is applicable to all available wheel spindles.	
Diagram  The diagram illustrates the measurement setup for the run-out of the internal taper of a wheel spindle. A cylindrical spindle is shown with a dashed centerline. Two dial gauges are positioned to measure the run-out: gauge 'a' is near the spindle nose, and gauge 'b' is at a distance of 100 or 250 units from the nose. A coordinate system is defined with the Z-axis along the spindle's axis and the X-axis perpendicular to it. A red watermark 'STANDARDSDISO.COM. Click to view the full PDF of ISO 2407:2024' is overlaid diagonally across the diagram.	
Tolerance a) 0,005 b) 0,010 for a measuring distance of 100 0,015 for a measuring distance of 250	
Measurement results Measured distance: a) b)	
Measuring instruments Test mandrel according to the type of spindle nose and dial gauge	
Observations and reference to ISO 230-1:2012, 12.5.3 In the case of an internal taper, the test shall be made with the aid of a test mandrel. See also test AR2 in Annex A .	

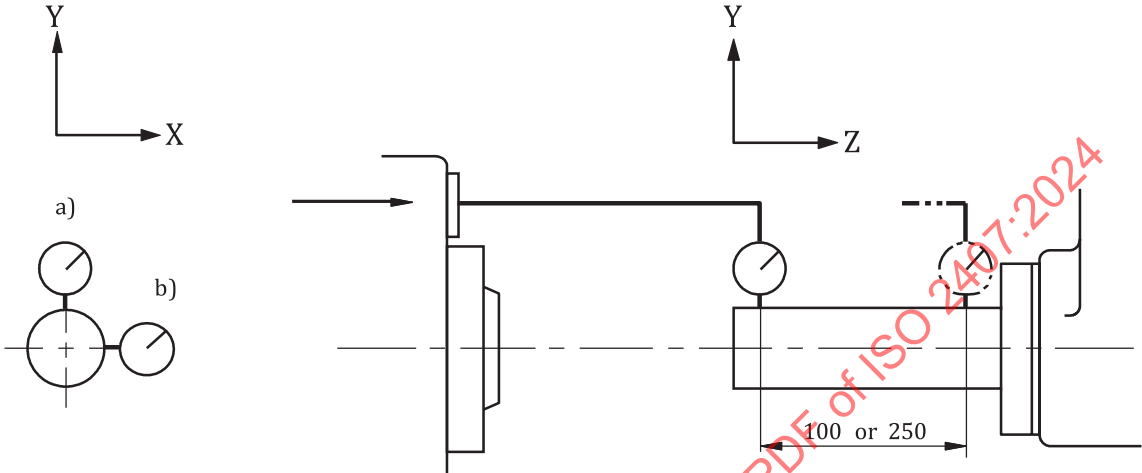
Object	G8
Checking of parallelism of the wheel spindle axis, (C1), to the Z-axis motion of the wheelhead (or of the workhead): a) in the vertical plane, $E_{A(0Z)(C1)}$; b) in the horizontal plane, $E_{B(0Z)(C1)}$. This test is applicable to all available wheel spindles.	
Diagram 	
Tolerance a) 0,007/100, 0,020/300 (0,065/1 000); test mandrel end directed upwards b) 0,004/100, 0,010/300 (0,035/1 000)	
Measurement results a) b)	
Measuring instruments Test mandrel and dial gauge or optical instruments	
Observations and reference to ISO 230-1:2012, 10.1.3 The checking shall be done first at one angular position of the wheel spindle, (C1), and then repeated after rotating the spindle through 180°. Mean values shall be taken at each measuring point in order to evaluate the parallelism error.	

Object	G9
Checking of the equidistance (difference in height) of the workholding spindle axis, (C'), and the wheel spindle axis, (C1), in the vertical plane. This test is applicable to all available wheel spindles.	
Diagram 	
Tolerance 0,025	
Measurement results	
Measuring instruments Test mandrel, dial gauge and dial gauge support, or optical instruments	
Observations and reference to ISO 230-1:2012, 12.3.3 The test shall be carried out in the vertical plane after having obtained alignment in the horizontal plane. Specific care shall be devoted to minimize the compliance of the dial gauge support.	

6.4 Facing wheelhead

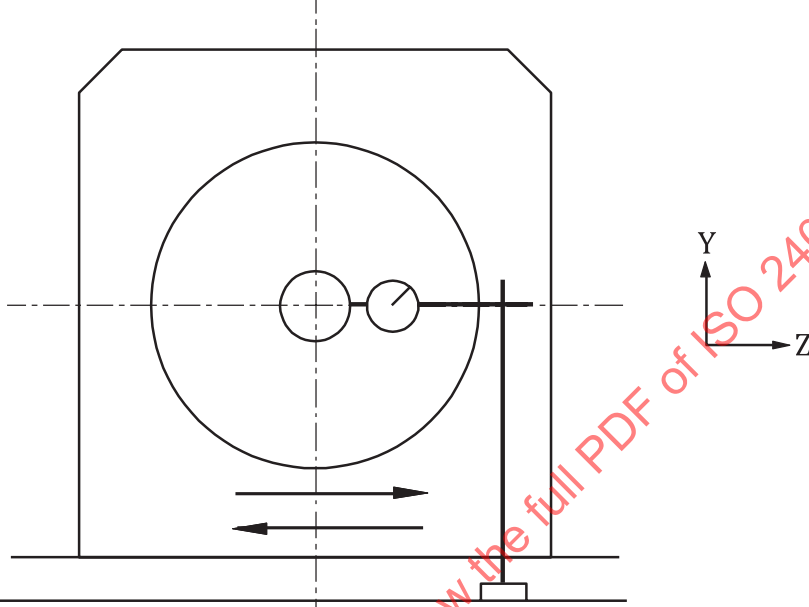
Object	G10
Checking of the facing spindle: a) run-out of the external centring surface; b) axial error motion, $E_{Z(C2)}$; c) face run-out of the front resting surface.	
Diagram 	
Key A distance from the spindle axis F axial force	
Tolerance a) 0,005 b) 0,005 c) 0,010	
Measurement results a) b) c)	
Measuring instruments Dial gauge for a) and c) and dial gauge with flat-ended stylus tip for b)	
Observations and, for a) and c), reference to ISO 230-1:2012, 12.5, for b), reference to ISO 230-7:2015, 5.4.4 For a), in the case of a tapered spindle nose, the stylus of the dial gauge shall be set normal to the surface to be checked. For b), the value and the direction of the axial force, F , to be applied shall be specified by the supplier/man- ufacturer. Where preloaded thrust bearings are used, no force needs to be applied. For c), the distance, A , of the dial gauge from the spindle axis shall be as large as possible. See also test AR2 in Annex A .	

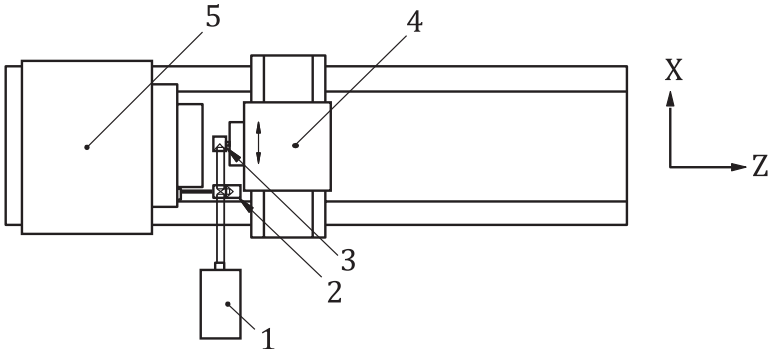
Object	G11
Checking of perpendicularity of the flange face of the facing spindle, (C2), to the workholding spindle axis, (C').	
Diagram 	
Tolerance 0,020 over 300 where 300 is the distance between the two points touched.	
Measurement results	
Measuring instruments Dial gauge and dial gauge support	
Observations and references to ISO 230-1:2012, 12.4.1 and 12.4.8 The dial gauge is rotated through 360° and the largest variation in the readings is the squareness error to be reported.	

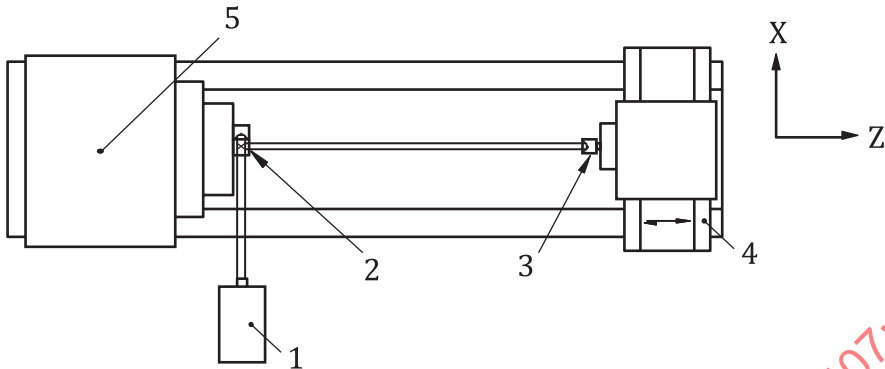
Object	G12
Checking of parallelism of the facing spindle axis, (C2), to the Z-axis motion (of the wheelhead or of the workhead): a) in the vertical plane, $E_{A(0Z)(C2)}$; b) in the horizontal plane, $E_{B(0Z)(C2)}$.	
Diagram 	
Tolerance a) 0,008/100, 0,020/250 (0,080/1 000); test mandrel end directed upwards b) 0,003/100, 0,008/250 (0,032/1 000)	
Measurement results a) b)	
Measuring instruments Dial gauge and test mandrel	
Observations and reference to ISO 230-1:2012, 10.1.3 The checking shall be done first at one angular position of the facing spindle, (C2), and then repeated after rotating the spindle through 180°. Mean values shall be taken at each measuring point in order to evaluate the parallelism error.	

Object		G13
Checking of parallelism of the swivel arm axis, C3, to the workholding spindle axis, (C'), in the ZX plane. This test is only applicable for the machine tool configuration depicted in Figure 1 d .		
Diagram		
Key		
1, 2 measurement points		
3 flat disc		
d measurement distance projected on the X-axis		
C3 swivelling arm axis		
(C') workholding spindle axis		
Tolerance		
0,035/1 000		
Measurement results		Measured distance d:
Measuring instruments		
Dial gauge and flat disc or straightedge		
Observations and references to ISO 230-1:2012, 10.1.5.1		
The dial gauge is rigidly mounted on the facing spindle and it is brought to contact the disc. The (C')-axis is rotated by 180° and the perpendicularity of the disc surface with respect to the (C')-axis is adjusted, or the lack of perpendicularity is considered in the measurement.		
A reading of the dial gauge is taken at point 1 then the C3-axis is swivelled and a new reading is taken at point 2. The difference between the two readings divided by the distance, d, between the measurement points 1 and 2, projected on the X-axis, is the parallelism error to be reported.		

7 Positioning tests

Object	P1
Checking of the repeatability of the finishing approach of the wheelhead cross slide (or the workhead cross slide).	
Diagram 	
Tolerance 0,002	
Measurement results	
Measuring instruments Dial gauge	
Observations Carry out five consecutive tests for the wheelhead cross slide positioning (or workhead slide positioning), the motion being obtained by a quick approach followed by a slow approach. The range of individual positioning measurements is the measurement result to be reported.	

Object				P2
Checking of the accuracy and repeatability of the X-axis motion of the wheelhead cross slide, E_{XX} .				
Diagram				
				
Key				
1 laser head	2 interferometer	3 retro-reflector	4 wheelhead carriage	5 workhead
Tolerance		Measuring length		Measurement results: Measured length
For axes up to 1 000		≤500	≤1 000	
Unidirectional positioning accuracy of X-axis ^a	$E_{XX,A↑}; E_{XX,A↓}$	0,016	0,020	
Unidirectional positioning repeatability of X-axis ^a	$E_{XX,R↑}; E_{XX,R↓}$	0,006	0,008	
Mean reversal value of X-axis	$E_{XX,B}$	0,010	0,013	
Unidirectional systematic positioning error of X-axis ^a	$E_{XX,E↑}; E_{XX,E↓}$	0,008	0,013	
^a Possible basis for machine acceptance.				
Measuring instruments				
Laser measuring equipment or linear scale				
Observations and references to ISO 230-1:2012, 3.4.3 and ISO 230-2:2014, Clause 3, 5.3.2 and 5.3.3				
Relative measurement between the tool position and work-piece position is desired. When a linear scale is used, it shall be set on the table parallel to the X-axis, the scale reader being on the tool position. When laser equipment is used, the reflector should be set on the spindle head and the interferometer on the workhead. Concerning the test conditions, test program and presentation of results, ISO 230-2:2014, Clauses 3, 4 and 7 and 8.2.4 shall be referred to. The starting point of measurement shall be stated.				

Object		P3			
Checking of the accuracy and repeatability of the Z-axis motion of the wheelhead carriage, E_{ZZ} .					
Diagram					
					
Key					
1 laser head		2 interferometer		3 retro-reflector	
		4 wheelhead carriage		5 workhead	
Tolerance		Measuring length			Measurement results: Measured length
For axes up to 2 000		≤500	≤1 000	≤2 000	
Bi-directional positioning accuracy of Z-axis ^a	$E_{ZZ,A}$	0,025	0,032	0,040	
Unidirectional positioning accuracy of Z-axis ^a	$E_{ZZ,A\uparrow}$ $E_{ZZ,A\downarrow}$	0,015	0,019	0,024	
Unidirectional positioning repeatability of Z-axis ^a	$E_{ZZ,R\uparrow}$ $E_{ZZ,R\downarrow}$	0,008	0,010	0,013	
Mean reversal value of Z-axis	$E_{ZZ,\bar{B}}$	0,010	0,013	0,016	
Bi-directional systematic positioning error of Z-axis ^a	$E_{ZZ,E}$	0,016	0,020	0,025	
Unidirectional systematic positioning error of Z-axis ^a	$E_{ZZ,E\uparrow}$ $E_{ZZ,E\downarrow}$	0,008	0,010	0,013	
Mean bi-directional positioning error of Z-axis ^a	$E_{ZZ,M}$	0,010	0,013	0,016	
For axes exceeding 2 000					
Bi-directional systematic positioning error of Z-axis ^a	$E_{ZZ,E}$	0,032 + 0,008 for each additional 1 000			
Mean bi-directional positioning error of Z-axis ^a	$E_{ZZ,M}$	0,025 + 0,005 for each additional 1 000			
^a Possible basis for machine acceptance.					
Measuring instruments					
Laser measuring equipment or linear scale					

Observations and references to ISO 230-1:2012, 3.4.3; ISO 230-2:2014, Clause 3, 5.3.2 and 5.3.3

Relative measurement between the tool position and work-piece position is desired. When a linear scale is used, it shall be set on the table parallel to the Z-axis, the scale reader being on the tool position. When laser equipment is used, the reflector should be set on the spindle head and the interferometer on the workhead. For axes exceeding 2 000, one or more segments of 2 000 with 5 runs forward and backward each is recommended. Tolerances for axis lengths $\leq 2\ 000$ shall be applied.

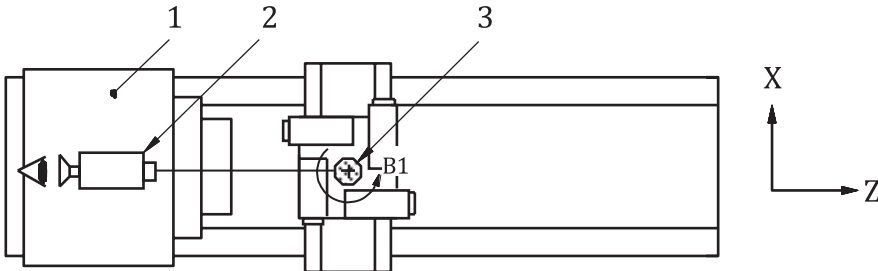
For axes up to 4 000, one measurement over one 2 000 segment is recommended, for axes over 4 000 and up to 8 000, two 2 000 segments are recommended, and so forth.

Test segments shall be equally spaced along the full axis length, with any excess length equally divided at the beginning, in between and at the end of the test segments.

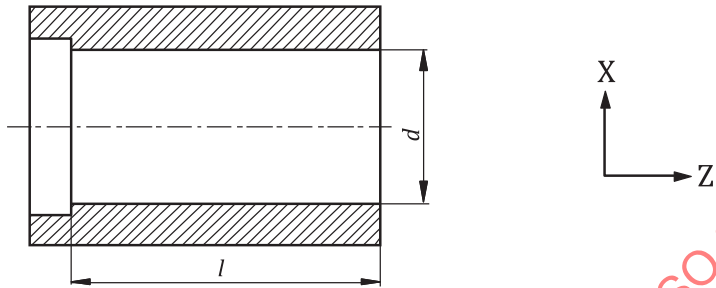
Other number of 2 000 segments, other lengths of segments, as well as the positions of the segments within the working area can be subject to agreement between the manufacturer/supplier and the user. Additionally, one test over the total travel of the axis (once forward and once backward) shall be performed.

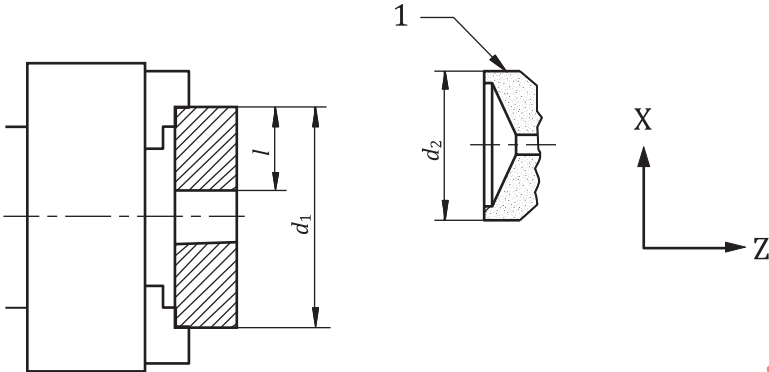
Concerning the test conditions, test program and presentation of results, ISO 230-2:2014, Clauses 3, 4 and 7 and 8.2.4 shall be referred to. The starting point of measurement shall be stated.

STANDARDSISO.COM : Click to view the full PDF of ISO 2407:2024

Object		P4		
Checking of the accuracy and repeatability of the B1-axis of rotation, E_{BB1} .				
Diagram				
				
Key				
1 workhead 2 autocollimator 3 polygon				
Tolerance		For 360°		Measurement results
(30° or 45° interval positioning)		" urad		
Bi-directional positioning accuracy of B1-axis ^a	$E_{BB1,A}$	11	55	
Unidirectional positioning repeatability of B1-axis ^a	$E_{BB1,R\uparrow}; E_{BB1,R\downarrow}$	6	30	
Bi-directional positioning repeatability of B1-axis	$E_{BB1,R}$	8	40	
Mean reversal value of B1-axis	$E_{BB1,\bar{B}}$	6	30	
Bi-directional systematic positioning error of B1-axis ^a	$E_{BB1,E}$	6	30	
Mean bi-directional positioning error of B1-axis ^a	$E_{BB1,M}$	4	20	
^a Possible basis for machine acceptance.				
Measuring instruments				
Laser angle measuring equipment or polygon and autocollimator				
Observations and references to ISO 230-1:2012, 3.4.3 and ISO 230-2:2014, Clause 3, 5.3.4 and 5.3.5				
Fix the autocollimator on the workhead side of the machine tool and fix the polygon near the centre of the B1-axis of rotation, in alignment with the autocollimator at the first measuring rotary position.				
Target positions shall be selected in accordance with ISO 230-2:2014, Table 1.				
Angular positioning feed speed shall be agreed between the manufacturer/supplier and the user.				
Concerning the test conditions, test program and presentation of results, ISO 230-2:2014, Clauses 3, 4 and 7 and 8.2.4 shall be referred to.				

8 Machining tests

Object		M1															
Checking of the accuracy of the bore of a test piece ground by internal grinding: a) roundness; b) consistency of diameters.																	
Diagram																	
																	
<table><tr><th>Maximum admissible diameter for grinding^a <i>D</i></th><th>Test bore diameter <i>d</i></th><th>Test bore length <i>l</i></th></tr><tr><td><i>D</i> ≤ 40</td><td>15</td><td>25</td></tr><tr><td>40 < <i>D</i> ≤ 80</td><td>30</td><td>50</td></tr><tr><td>80 < <i>D</i> ≤ 150</td><td>60</td><td>100</td></tr><tr><td><i>D</i> > 150</td><td>100</td><td>150</td></tr></table>			Maximum admissible diameter for grinding ^a <i>D</i>	Test bore diameter <i>d</i>	Test bore length <i>l</i>	<i>D</i> ≤ 40	15	25	40 < <i>D</i> ≤ 80	30	50	80 < <i>D</i> ≤ 150	60	100	<i>D</i> > 150	100	150
Maximum admissible diameter for grinding ^a <i>D</i>	Test bore diameter <i>d</i>	Test bore length <i>l</i>															
<i>D</i> ≤ 40	15	25															
40 < <i>D</i> ≤ 80	30	50															
80 < <i>D</i> ≤ 150	60	100															
<i>D</i> > 150	100	150															
Key																	
<i>d</i> test bore diameter <i>l</i> test bore length ^a Refer to M2 diagram.																	
Tolerance																	
a) 0,003 b) 0,005 for <i>l</i> = 25 0,005 for <i>l</i> = 50 0,010 for <i>l</i> = 100 0,015 for <i>l</i> = 150																	
Measurement results		Maximum admissible diameter, <i>D</i> :															
a) b)																	
Measuring instruments																	
Bore gauge and roundness measuring machine																	
Observations and references to ISO 230-1:2012, B.1.1 and B.1.2																	
Grinding of the test piece shall be conducted along the whole length, <i>l</i> , without arbor support. For a), the measurements for roundness shall be made at several positions of the test piece and the greatest measured value shall be recorded. For b), the variation of diameter shall be measured at both ends and in the middle of the test piece. The measurements shall be carried out in a single axial plane. Any taper should be such that the largest diameter is near the workhead.																	

Object		M2
Checking of the flatness of the ground face of a disk.		
Diagram		
		
Key		
1 grinding wheel		
d_1 outer diameter of the disk		
d_2 outer diameter of the grinding wheel		
l width of ground face		
Tolerance		
0,010 for $d_1 = 300$		
The ground test piece shall be flat or concave.		
Measurement results		
Measuring instruments		
Straightedge and gauge blocks for surface plate and dial gauge or coordinate measuring machine (CMM)		
Observations and references to ISO 230-1:2012, B.1.1 and B.1.2		
The test piece shall be mounted on a face plate or chuck.		
The workhead spindle axis is set parallel to the Z-axis motion. Facing of a flat surface perpendicular to the workhead spindle.		
The outer diameter, d_1 , of the disc and the width, l , of the ground face should conform to the following formulae:		
$d_1 = \frac{2}{3} \times D \quad ; \quad l = \frac{2}{3} \times d_2$		
Other d_1 and l values can be agreed between the manufacturer/supplier and the user.		