

INTERNATIONAL STANDARD

ISO
603-1

First edition
1999-07-15

Bonded abrasive products — Dimensions —

Part 1:

Grinding wheels for external cylindrical
grinding between centres

Produits abrasifs agglomérés — Dimensions —

Partie 1: Meules pour rectification cylindrique extérieure entre centres



Reference number
ISO 603-1:1999(E)

Contents	Page
1 Scope	1
2 Normative references	2
3 Dimensions.....	3
3.1 Type 1: Straight grinding wheel	3
3.2 Type 5: Wheel recessed on one side	4
3.3 Type 7: Wheel recessed on both sides.....	6
3.4 Type 20: Wheel relieved on one side	8
3.5 Type 21: Wheel relieved on both sides.....	8
3.6 Type 22: Wheel relieved on one side and recessed on the other side.....	9
3.7 Type 23: Wheel relieved and recessed on one side	9
3.8 Type 24: Wheel relieved and recessed on one side and recessed on the other side.....	10
3.9 Type 25: Wheel relieved and recessed on one side and relieved on the other side.....	11
3.10 Type 26: Wheel relieved and recessed on both sides.....	12
3.11 Type 38: Hubbed wheel.....	13
3.12 Type 39: Double hubbed wheel	13
4 Designation	15
5 Specifications.....	15
5.1 Tolerances	15
5.2 Balancing.....	15
5.3 Marking	15
Bibliography	16

© ISO 1999

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet iso@iso.ch

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 603-1 was prepared by Technical Committee ISO/TC 29, *Small tools*, subcommittee SC 5, *Grinding wheels and abrasives*.

This first edition, together with ISO 603-2:1999 to ISO 603-16:1999, cancels and replaces ISO/R 603:1967, ISO 603-2:1981, ISO 1117:1975, ISO 2220:1972, ISO 2933:1974, ISO 3290:1976 and ISO 3921:1976 as a technical revision of these standards.

ISO 603 consists of the following parts, under the general title *Bonded abrasive products — Dimensions*:

- Part 1: Grinding wheels for external cylindrical grinding between centres
- Part 2: Grinding wheels for centreless external cylindrical grinding
- Part 3: Grinding wheels for internal cylindrical grinding
- Part 4: Grinding wheels for surface grinding/peripheral grinding
- Part 5: Grinding wheels for surface grinding/face grinding
- Part 6: Grinding wheels for tool and tool room grinding
- Part 7: Grinding wheels for manually guided grinding
- Part 8: Grinding wheels for deburring and fettling/snagging
- Part 9: Grinding wheels for high-pressure grinding
- Part 10: Stones for honing and superfinishings
- Part 11: Hand finishing sticks
- Part 12: Grinding wheels for deburring and fettling on a straight grinder
- Part 13: Grinding wheels for deburring and fettling on a vertical grinder
- Part 14: Grinding wheels for deburring and fettling/snagging on an angle grinder
- Part 15: Grinding wheels for cutting-off on stationary or mobile cutting-off machines
- Part 16: Grinding wheels for cutting-off on hand held power tools

Bonded abrasive products — Dimensions —

Part 1:

Grinding wheels for external cylindrical grinding between centres

1 Scope

This part of ISO 603 specifies the nominal dimensions, in millimeters, of:

- Type 1: Straight grinding wheel
- Type 5: Wheel recessed on one side
- Type 7: Wheel recessed on both sides
- Type 20: Wheel relieved on one side
- Type 21: Wheel relieved on both sides
- Type 22: Wheel relieved on one side and recessed on the other side
- Type 23: Wheel relieved and recessed on one side
- Type 24: Wheel relieved and recessed on one side and recessed on the other side
- Type 25: Wheel relieved and recessed on one side and relieved on the other side
- Type 26: Wheel relieved and recessed on both sides.
- Type 38: Hubbed wheel
- Type 39: Double hubbed wheel

These bonded abrasive products are intended to be used for external cylindrical grinding between centres. The workpiece and the grinding wheel are mechanically guided.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO 603. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 603 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 525:1999, *Bonded abrasive products — General requirements*.

ISO 6103:1999, *Bonded abrasive products — Static balancing of grinding wheels — Testing*.

ISO 13942:—¹⁾, *Bonded abrasive products — Limit deviations and run-out tolerances*.

STANDARDSISO.COM : Click to view the full PDF of ISO 603-1:1999

¹⁾ To be published.

3 Dimensions

3.1 Type 1: Straight grinding wheel

See Figure 1 and Table 1.

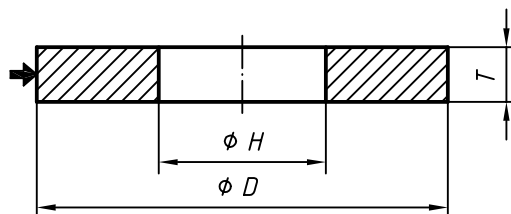


Figure 1 — Type 1

Table 1 — Dimensions of Type 1

D	T										H
	20	25	32	40	50	63	80	100	125	150	
250	X	X	X	X	—	—	—	—	—	—	76,2
											127
300	X	X	X	X	X	—	—	—	—	—	76,2
											127
350/356	—	X	X	X	X	X	—	—	—	—	127
400/406	—	—	X	X	X	X	X	—	—	—	
450/457	—	—	X	X	X	X	X	—	—	—	127
											203,2
500/508	—	—	X	X	X	X	X	—	—	—	203,2
											304,8
600/610	X ^a	X ^a	X ^a	X	X	X	X	X	—	—	203,2
											304,8
750/762	X ^a	X ^a	X ^a	X ^a	X	X	X	X	X	—	304,8
800/813	X ^a	X ^a	X ^a	X ^a	X	X	X	X	X	—	
900/914	X ^a	X ^a	X ^a	X ^a	—	X	X	X	X	X	304,8
											406,4
1 060/1 067	X ^a	X ^a	X ^a	X ^a	X ^a	X	X	X	X	X	304,8
											406,4
1 250	—	—	—	—	—	X	X	X	X	X	508

^a Mainly for camshaft or crankshaft grinding.

3.2 Type 5: Wheel recessed on one side

See Figure 2 and Table 2.

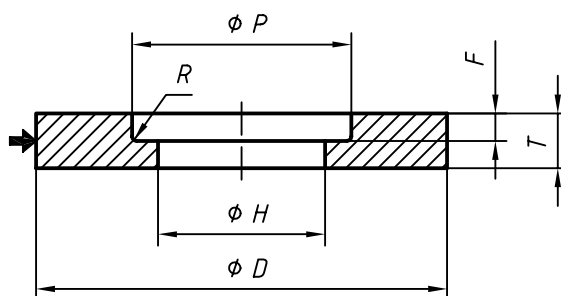


Figure 2 — Type 5

STANDARDSISO.COM : Click to view the full PDF of ISO 603-1:1999

Table 2 — Dimensions of Type 5

<i>D</i>	<i>T</i>	<i>H</i>	<i>P</i>	<i>F</i>	<i>R</i> _{max}
300	40	76,2	150	13	3,2
	50				
300	40	127	190	13	5
	50				
350/356	40	127	215	13	
	50			13	
400/406	40				
	50				
450/457	63			25	
	80				
450/457	40	203,2	280	13	
	50				
	63			25	
	80				
500/508	40	203,2	400	13	8
	50			25	
	63				
	80				
500/508	40	304,8	400	13	
	50			25	
	63				
	80				
600/610	63	203,2	400	13	
	80			25	
	100			50	
600/610	63	304,8	400	13	
	80			25	
	100			50	
750/762	63	304,8	400	13	
	80			25	
	100			50	
800/813	63	304,8	450	13	
	80			25	
	100			50	
900/914	63	304,8	450	13	
	80			25	
	100			50	
1 060/1 067	63	304,8	455	13	
	80			25	
	100			50	
	125			60	
	150			70	
1 060/1 067	63	508	720	13	
	80			25	
	100			50	
	125			60	
	150			70	

3.3 Type 7: Wheel recessed on both sides

See Figure 3 and Table 3.

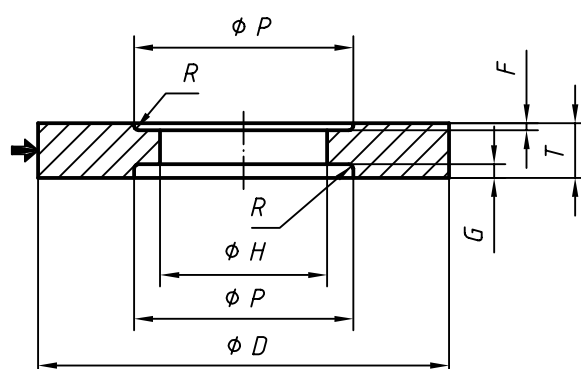


Figure 3 — Type 7

STANDARDSISO.COM : Click to view the full PDF of ISO 603-1:1999

Table 3 — Dimensions of Type 7

<i>D</i>	<i>T</i>	<i>H</i>	<i>P</i>	<i>F</i>	<i>G</i>	<i>R</i> _{max}	
300	40	76,2	150	6	6	3,2	
	50			10	10		
300	40	127	190	6	6	5	
	50			10	10		
350/356	40	127	215	10	10	5	
	50						
400/406	40			10	10		
	50						
450/457	63			13	13		
	80						
450/457	50	203,2	280	10	10	8	
	63			13	13		
	80						
500/508	40	203,2	400	10	10		
	50						
	63			13	13		
	80						
500/508	40	304,8	400	10	10		
	50						
	63			13	13		
	80						
600/610	50	203,2	400	10	10		
	63						
	80			13	13		
	100				25		
600/610	50	304,8			10		10
	63						
	80			13	13		
	100				25		
750/762	80	304,8	400	13	13		
	100				25		
800/813	63	304,8	450	13	13		
	80				13		
	100				25		
900/914	80	304,8	450	13	13		
	100				25		
1 060/1 067	63	304,8	455	13	13	8	
	80						
	100			25	25		
	125			30	30		
	150						
1 060/1 067	63	508	720	13	13		
	80						
	100			25	25		
	125						
	150			30	30		

3.4 Type 20: Wheel relieved on one side

See Figure 4 and Table 4.

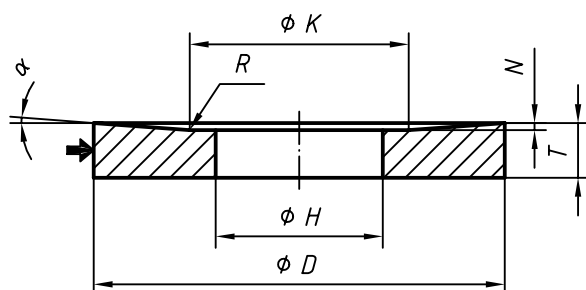


Figure 4 — Type 20

3.5 Type 21: Wheel relieved on both sides

See Figure 5 and Table 4

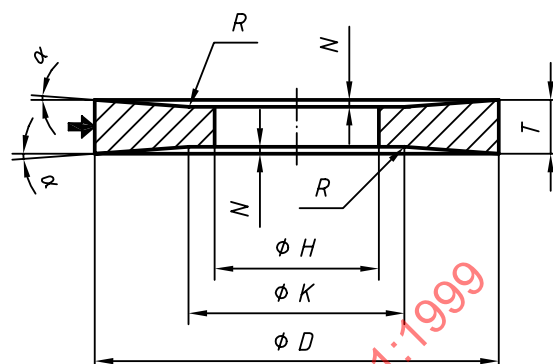


Figure 5 — Type 21

Table 4 — Dimensions of Type 20 and Type 21

D	T											H	K	N^a $\alpha \approx$		$R_{\max}$
	13	16	20	25	32	40	50	63	80	100	125			2°	4°	
250	X	X	X	X	X	X	—	—	—	—	—	76,2	150	2	4	3,2
												127	190	1	2	5
300	X	X	X	X	X	X	X	—	—	—	—	76,2	150	3	5	3,2
												127	190	2	4	5
300/356	—	—	X	X	X	X	X	X	—	—	—	127	215	2	5	
400/406	—	—	X	X	X	X	X	X	X	—	—			3	7	
450/457	—	—	X	X	X	X	X	X	X	—	—	127	215	4	8	
												203,2	280	3	6	
500/508	—	—	X	X	X	X	X	X	X	—	—	203,2	400	2	4	8
												304,8				
600/610	—	—	—	—	X	X	X	X	X	X	—	203,2		4	7	
												304,8				
750/762	—	—	—	—	X	X	X	X	X	X	X	304,8	400	6	13	

^a The values N or $2N$ are taken less than or equal to half thickness T .

3.6 Type 22: Wheel relieved on one side and recessed on the other side

See Figure 6 and Table 5.

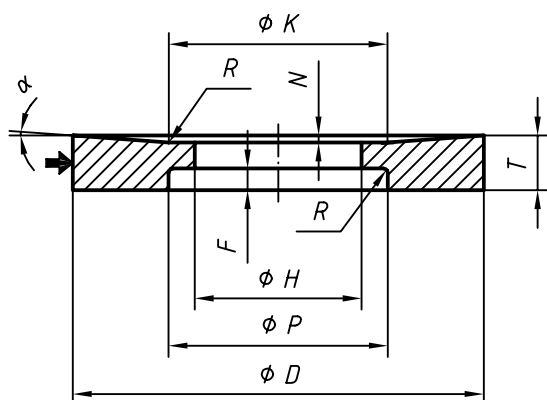


Figure 6 — Type 22

3.7 Type 23: Wheel relieved and recessed on one side

See Figure 7 and Table 5.

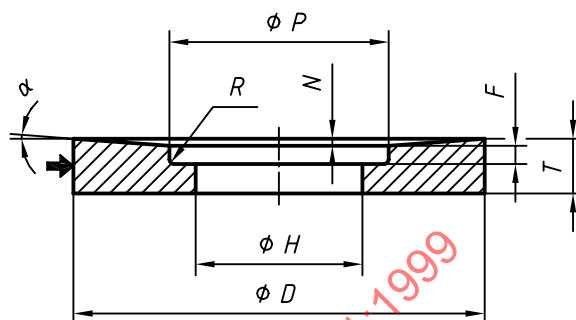


Figure 7 — Type 23

Table 5 — Dimensions of Type 22 and Type 23

D	T	H	K = P	F	N α		$R_{\max}$
					2°	4°	
300	40	76,2	150	13	3	5	3,2
	50				3	5	
300	40	127	190	13	2	4	5
	50				2	4	
350/356	40	127	215	13	2	5	
	50				2	5	
400/406	40			13	3	7	
	50				3	7	
450/457	63			25	4	8	
	80				4	8	
450/457	40	203,2	280	13	3	6	8
	50				3	6	
	63			25	3	6	
	80				3	6	
500/508	40	203,2	400	13	2	4	
	50				2	4	
	63			25	2	4	
	80				2	4	
500/508	40	304,8	400	13	2	4	
	50				2	4	
	63			25	2	4	
	80				2	4	
600/610	63	203,2	400	13	4	7	
	80			25	4	7	
	100			40	4	7	
600/610	63	304,8	400	13	4	7	
	80			25	4	7	
	100			40	4	7	
750/762	63	304,8	400	13	6	13	
	80			25	6	13	
	100			40	6	—	

3.8 Type 24: Wheel relieved and recessed on one side and recessed on the other side

See Figure 8 and Table 6.

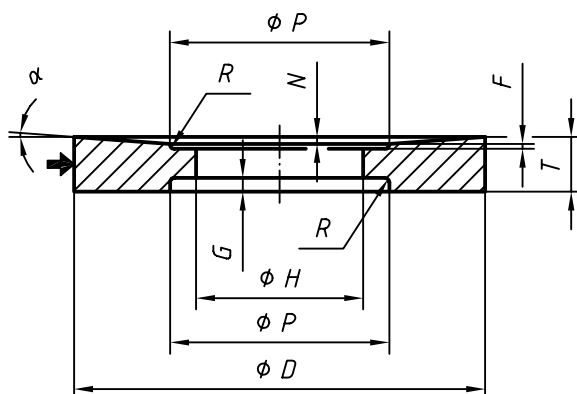


Figure 8 — Type 24

Table 6 — Dimensions of Type 24

D	T	H	P	F^a	G^a	N^a α		$R_{\max}$
						2°	4°	
300	40	76,2	150	6	6	2	4	3,2
	50			10	10	3	—	
300	40	127	190	6	6	2	4	5
	50			10	10	3	—	
350/356	40	127	215	6	6	2	5	
	50					2	5	
400/406	40					3	7	
	50					3	7	
450/457	63	127	215	10	13	4	8	
	80			13		4	8	
450/457	50	203,2	280	6	13	3	6	
	63			3		6		
	80			3		6		
500/508	40	203,2	400	6	6	2	4	8
	50			13	13	2	4	
	63					2	4	
	80					2	4	
500/508	40	304,8	400	6	6	2	4	
	50			13	13	2	4	
	63					2	4	
	80					2	4	
600/610	50	203,2	400	6	6	4	7	
	63			13	13	4	—	
	80					4	7	
	100					4	7	
600/610	50	304,8		6	6	4	7	
	63			13	13	4	—	
	80					4	7	
	100					4	7	
750/762	80	304,8		13	13	6	13	
	100				25	6	—	

^a The values $N + F + G$ are taken less than or equal to half thickness T .

^a The values $N + F + G$ are taken less than or equal to half thickness T .

3.9 Type 25: Wheel relieved and recessed on one side and relieved on the other side

See Figure 9 and Table 7.

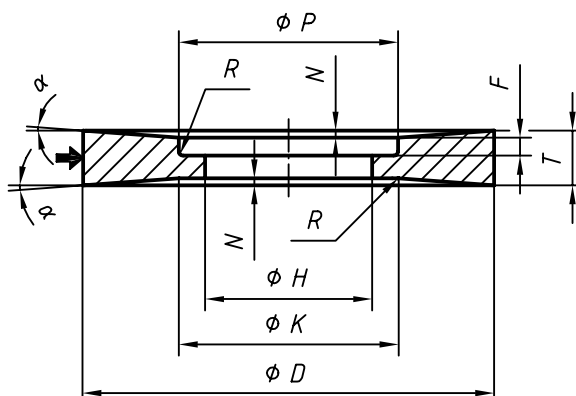


Figure 9 — Type 25

Table 7 — Dimensions of Type 25

D	T	H	$K = P$	F^a	N^a		$R_{\max}$
					α	$\approx$	
300	40	76,2	150	13	2°	4°	3,2
	50				3	5	
300	40	127	190	13	2	—	5
	50				2	4	
350/356	40	127	215	13	2	—	
	50				2	5	
400/406	40	127	215	13	3	—	
	50				3	6	
450/457	63	127	215	13	4	8	
	80			25	4	7	
450/457	40	203,2	280	13	3	—	
	50				3	6	
	63				3	6	
	80				3	6	
500/508	40	203,2	400	13	2	—	8
	50				2	4	
	63				2	4	
	80			25	2	4	
500/508	40	304,8	400	13	2	—	
	50				2	4	
	63				2	4	
	80			25	2	4	
600/610	63	203,2	400	13	4	7	
	80			25	4	7	
	100			40	4	—	
600/610	63	304,8	400	13	4	7	
	80			25	4	7	
	100			40	4	—	
750/762	63	304,8	400	13	6	—	
	80			25	6	—	
	100			40	5	—	

^a The values $2N + F$ are taken less than or equal to half thickness T .

3.10 Type 26: Wheel relieved and recessed on both sides

See Figure 10 and Table 8.

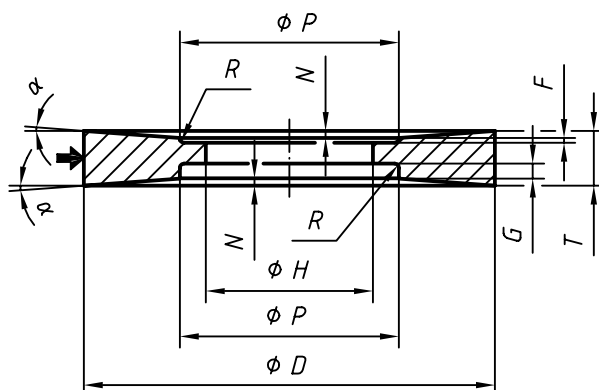


Figure 10 — Type 26


Table 8 — Dimensions of Type 26

D	T	H	P	F^a	G^a	N^a α		$R_{\max}$
						2°	4°	
300	40	76,2	150	6	6	2	4	3,2
	50			10	10	2	—	
300	40	127	190	6	6	2	4	5
	50			10	10	2	—	
350/356	40	127	215	6	6	2	—	
	50			6	6	2	5	
400/406	40	127	215	6	6	3	—	
	50			6	6	3	6	
450/457	63	127	215	6	6	4	8	
	80			13	13	4	7	
450/457	50	203,2	280	6	6	3	6	
	63			6	6	3	6	
	80			13	13	3	6	
500/508	40	203,2	400	6	6	2	4	8
	50			6	6	2	4	
	63			13	13	2	—	
	80			13	13	2	4	
500/508	40	304,8	400	6	6	2	4	
	50			6	6	2	4	
	63			13	13	2	—	
	80			13	13	2	4	
600/610	50	203,2	400	6	6	4	—	
	63			6	6	—	—	
	80			13	13	4	—	
	100			13	25	4	—	
600/610	50	304,8	400	6	6	4	—	
	63			6	6	—	—	
	80			13	13	4	—	
	100			13	25	4	—	
750/762	80	304,8	400	13	13	6	—	
	100			13	25	6	—	

^a The values $2N + F + G$ are taken less than or equal to half thickness T .

3.11 Type 38: Hubbed wheel

See Figure 11 and Table 9.

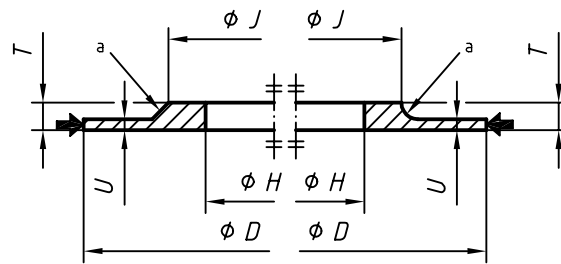


a Chamfer or radius left to the manufacturer's discretion.

Figure 11 — Type 38

3.12 Type 39: Double hubbed wheel

See Figure 12 and Table 9.

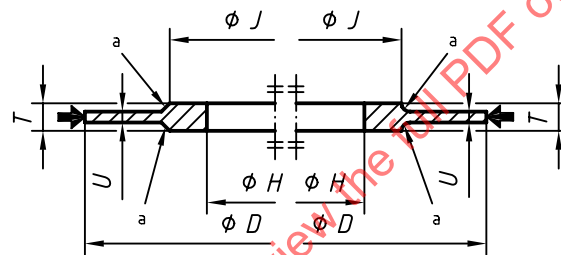

a Chamfer or radius left to the manufacturer's discretion.

Figure 12 — Type 39