
**Information technology — Biometric
data interchange formats —**

**Part 7:
Signature/sign time series data**

*Technologies de l'information — Formats d'échange de données
biométriques —*

Partie 7: Données de série chronologique de signature/signé

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 19794-7:2021



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	2
4 Abbreviated terms.....	3
5 Conformance.....	4
6 Conventions.....	4
6.1 Coordinate system.....	4
6.2 Octet and bit order.....	5
6.3 Registered format type identifiers.....	5
7 Channels.....	5
7.1 General.....	5
7.2 Pen tip position channels: X, Y, Z.....	6
7.3 Pen tip velocity channels: VX, VY.....	6
7.4 Pen tip acceleration channels: AX, AY.....	6
7.5 Time channel: T.....	6
7.6 Time difference channel: DT.....	7
7.7 Pen tip force channel: F.....	7
7.8 Pen tip switch state channel: S.....	7
7.9 Pen orientation channels: TX, TY, A, E, R.....	7
8 Binary full format.....	8
8.1 Record organization.....	8
8.2 General header.....	11
8.2.1 Structure.....	11
8.2.2 Format identifier.....	11
8.2.3 Version number.....	11
8.2.4 Length of the data record.....	11
8.2.5 Number of representations.....	11
8.2.6 Certification flag.....	11
8.3 Record body.....	12
8.3.1 Structure.....	12
8.3.2 Representation header.....	12
8.3.3 Representation body.....	17
9 Binary compact format.....	17
9.1 Record organization.....	17
9.2 Comparison algorithm parameters template.....	18
9.2.1 Structure.....	18
9.2.2 Minimum and maximum number of sample points.....	18
9.2.3 Channel descriptions.....	19
9.3 Embedment in a CBEFF data structure.....	20
9.4 Record body.....	20
10 Binary compression format.....	20
10.1 Record organization.....	20
10.2 General header.....	21
10.3 Record body.....	21
10.3.1 Structure.....	21
10.3.2 Representation header.....	21
10.3.3 Representation body.....	24
11 XML encoding.....	25
Annex A (normative) Conformance testing methodology.....	26

Annex B (informative) Best practices — Data acquisition	71
Annex C (informative) ASN.1 specification of the binary compact format	72
Annex D (informative) Binary signature/sign encoding examples	75
Annex E (normative) XML schema definition	77
Annex F (informative) XML signature/sign encoding example	81
Bibliography	84

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 19794-7:2021

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives or www.iec.ch/members_experts/refdocs).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents) or the IEC list of patent declarations received (see patents.iec.ch).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html. In the IEC, see www.iec.ch/understanding-standards.

This document was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 37, *Biometrics*.

This third edition cancels and replaces the second edition (ISO/IEC 19794-7:2014), which has been technically revised. It also incorporates the Amendment ISO/IEC 19794-7:2014/Amd 1:2015.

The main changes are as follows:

- inclusion of ISO/IEC 19794-7:2014/Amd 1:2015, *XML encoding*, and correction of technical defects therein.

A list of all parts in the ISO/IEC 19794 series can be found on the ISO and IEC websites.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html and www.iec.ch/national-committees.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 19794-7:2021

Information technology — Biometric data interchange formats —

Part 7: Signature/sign time series data

1 Scope

This document specifies data interchange formats for signature/sign behavioural data captured in the form of a multi-dimensional time series using devices such as digitizing tablets or advanced pen systems. The data interchange formats are generic, in that they can be applied and used in a wide range of application areas where handwritten signs or signatures are involved. No application-specific requirements or features are addressed in this document.

This document contains:

- a description of what data can be captured;
- three binary data formats for containing the data: a full format for general use, a compression format capable of holding the same amount of information as the full format but in compressed form, and a compact format for use with smart cards and other tokens that does not require compression/decompression but conveys less information than the full format;
- an XML schema definition; and
- examples of data record contents and best practices in capture.

Specifying which of the format types and which options defined in this document are to be applied in a particular application is out of scope; this needs to be defined in application-specific requirements specifications or application profiles.

It is advisable that cryptographic techniques be used to protect the authenticity, integrity, and confidentiality of stored and transmitted biometric data; yet such provisions are beyond the scope of this document.

This document also specifies elements of conformance testing methodology, test assertions and test procedures as applicable to this document. It establishes test assertions on the structure and internal consistency of the signature/sign time series data formats defined in this document (type A level 1 and 2 as defined in ISO/IEC 19794-1) and semantic test assertions (type A level 3 as defined in ISO/IEC 19794-1).

The conformance testing methodology specified in this document does not establish:

- tests of other characteristics of biometric products or other types of testing of biometric products (e.g. acceptance, performance, robustness, security); or
- tests of conformance of systems that do not produce data records claimed to conform to the requirements of this document.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 8825-1, *Information technology — ASN.1 encoding rules — Part 1: Specification of Basic Encoding Rules (BER), Canonical Encoding Rules (CER) and Distinguished Encoding Rules (DER)*

ISO/IEC 19794-1, *Information technology — Biometric data interchange formats — Part 1: Framework*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 19794-1 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

channel

data item (captured, intermediate, or processed) recorded in form of a time series

EXAMPLE Pen tip position x and y coordinates, pen tip force, *pen tilt along the x -axis* (3.7), *pen tilt along the y -axis* (3.8), *pen azimuth* (3.3), *pen elevation* (3.5), *pen rotation* (3.6).

3.2

compression

process that reduces the size of a digital file with or without loss of information

Note 1 to entry: The compression format defined in [Clause 10](#) includes data compressed by lossless compression schemes.

3.3

pen azimuth

angle measured clockwise from the positive y -axis to the perpendicular projection of the pen onto the writing plane

Note 1 to entry: The pen azimuth may range from 0° to 360° .

3.4

pen-down event

event from which on the pen tip is touching the writing plane

3.5

pen elevation

angle between the perpendicular projection of the pen onto the writing plane and the pen

Note 1 to entry: The pen elevation may range from 0° to 90° .

3.6

pen rotation

angle of the rotation of the pen about its longitudinal axis measured counter-clockwise from a device-specific rotational reference position

Note 1 to entry: The pen rotation may range from 0° to 360° .

3.7

pen tilt along the x -axis

angle measured clockwise from the positive z -axis to the perpendicular projection of the pen onto the xz plane

Note 1 to entry: The pen tilt along the x -axis may range from -90° to $+90^\circ$.

3.8**pen tilt along the y-axis**

angle measured clockwise from the positive z-axis to the perpendicular projection of the pen onto the yz plane

Note 1 to entry: The pen tilt along the y-axis may range from -90° to $+90^\circ$.

3.9**pen-up event**

event from which on the pen tip is not touching the writing plane, after a *pen-down event* (3.4)

3.10**sampling rate**

number of samples per second (or per another unit) taken from a continuous signal to make a discrete signal

3.11**signature/sign representation**

data recorded from a single signature/sign

3.12**x jitter**

sample standard deviation of at least 100 x-coordinate samples from a stationary pen

3.13**y jitter**

sample standard deviation of at least 100 y-coordinate samples from a stationary pen

3.14**x pixel density**

number of dots per millimetre that the capture device resolves in the x (horizontal) direction

3.15**y pixel density**

number of dots per millimetre that the capture device resolves in the y (vertical) direction

4 Abbreviated terms

ASCII	American Standard Code for Information Interchange
BDB	biometric data block
BDIR	biometric data interchange record
BHT	biometric header template
BIR	biometric information record
BIT	biometric information template
CBEFF	Common Biometric Exchange Formats Framework
IBIA	International Biometrics & Identification Association
ICS	implementation conformance statement
lsb	least significant bit
msb	most significant bit

5 Conformance

A binary biometric data record conforms to this document if it satisfies the format requirements with respect to its structure, with respect to relations among its fields, and with respect to relations between its fields and the underlying input that are specified within [Clauses 6 to 10](#) of this document.

An XML document conforms to this document if it satisfies the format requirements with respect to its structure, relations among its fields, and relations between its fields and the underlying input that are specified within [Annex E](#).

Biometric data interchange format conformance tests conform to this document if they satisfy all of the normative requirements set forth in [Annex A](#). Specifically, all level-1, level-2, and level-3 tests shall use the test assertions defined in [Table A.2](#), [Table A.3](#), and [Table A.4](#) of this document in conformity with the concept and rules set out in ISO/IEC 19794-1.


Implementations of this document tested according to the specified methodology shall be able to claim conformance only to those biometric data record requirements specified in this document that are tested by the test methods established by this methodology.

Implementations of this document are not necessarily required to conform to all possible aspects of this document, but only to those requirements that are claimed to be supported by the implementation in an implementation conformance statement (ICS), filled out in accordance with ISO/IEC 19794-1 and [Table A.1](#) of this document.

6 Conventions

6.1 Coordinate system

The coordinate system used to express the pen position shall be a three-dimensional Cartesian coordinate system. The x -axis shall be the horizontal axis of the writing plane, with x -coordinates increasing to the right. The y -axis shall be the vertical axis of the writing plane, with y -coordinates increasing upwards. The z -axis shall be the axis perpendicular to the writing plane, with z -coordinates increasing upwards out of the writing plane starting from 0. For an illustration see [Figure 1](#).

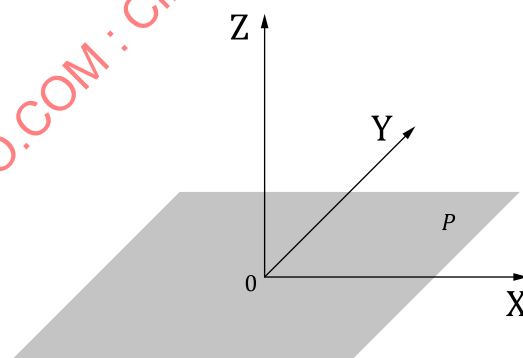

Key

P writing plane

Figure 1 — Coordinate system

NOTE The origin of x and y -coordinates is not specified here. Depending on the used technology, it can be, for instance, in the centre of the writing pad, at its lower left corner, or at the pen position at the first pen-down event.

6.2 Octet and bit order

The more significant bytes of any multi-byte quantity are stored at lower addresses in memory than (and are transmitted before) less significant bytes.

Within a byte, the bits are numbered from 8 to 1, where bit 8 is the ‘most significant bit’ (msb) and bit 1 the ‘least significant bit’ (lsb).

6.3 Registered format type identifiers

The data records specified in this document may be embedded in a CBEFF-compliant biometric information record (BIR) (see ISO/IEC 19785-1). This subclause lists the BDB (biometric data block) format owner identifier and the BDB format type identifiers that shall be used if embedded in a CBEFF BIR. These identifiers are registered with IBIA, the CBEFF Registration authority (see ISO/IEC 19785-2).

The format owner of the formats defined in the ISO/IEC 19794 series is ISO/IEC JTC 1/SC 37. The format owner identifier is 257 (0101_{Hex}). [Table 1](#) lists the format type identifiers for the formats defined in this document.

Table 1 — Format type identifiers

CBEFF BDB format type identifier	Short name	Full object identifier
14 (000e _{Hex})	signature-sign-time-series-full	{iso(1) registration-authority(1) cbeff(19785) biometric-organization(0) jtc1-sc37(257) bdb(0) signature-sign-time-series-full(14)}
15 (000f _{Hex})	signature-sign-time-series-compact	{iso(1) registration-authority(1) cbeff(19785) biometric-organization(0) jtc1-sc37(257) bdb(0) signature-sign-time-series-compact(15)}
30 (001e _{Hex})	signature-sign-time-series-compression	{iso(1) registration-authority(1) cbeff(19785) biometric-organization(0) jtc1-sc37(257) bdb(0) signature-sign-time-series-compression(30)}
38 (0026 _{Hex})	XML-signature-sign-time-series	{iso(1) registration-authority(1) cbeff(19785) biometric-organization(0) jtc1-sc37(257) bdb(0) XML-signature-sign-time-series(38)}

NOTE 1 The format type identifier for the full format defined in this document (ISO/IEC 19794-7:2021) is the same as the one for the full format defined in ISO/IEC 19794-7:2007. An indication of which version of the full format applies can be determined from the version number included in the general header.

NOTE 2 The compact format defined in this document (ISO/IEC 19794-7:2021) is the same as the one defined in ISO/IEC 19794-7:2007. Hence, the format type identifier for the compact format defined in this edition of ISO/IEC 19794-7 is also the same as the one for the compact format defined in ISO/IEC 19794-7:2007.

7 Channels

7.1 General

[Table 2](#) lists the channel names and their meanings. Signature/sign time series data captured with different capture devices or used in different applications may contain data from different channels. Either the T channel or the DT channel shall be present, or uniform sampling (constant time difference between adjacent sample points) shall be indicated (see [7.6](#)). Inclusion of at least one other channel is mandatory.

[Annex B](#) provides recommendations for ensuring the quality of signature/sign time series data.

Table 2 — Channels

Channel name	Description
X	x-coordinate (horizontal pen position)
Y	y-coordinate (vertical pen position)
Z	z-coordinate (height of pen above the writing plane)
VX	velocity in x-direction
VY	velocity in y-direction
AX	acceleration in x-direction
AY	acceleration in y-direction
T	time
DT	time difference
F	pen tip force
S	pen tip switch state (touching/not touching the writing plane)
TX	pen tilt along the x-axis
TY	pen tilt along the y-axis
A	pen azimuth
E	pen elevation
R	pen rotation

7.2 Pen tip position channels: X, Y, Z

There are three channels defined for recording pen tip position data in the three-dimensional space. The X channel is for recording the x-coordinate of the projection of the pen tip on the writing plane. The Y channel is for recording the y-coordinate of the projection of the pen tip on the writing plane. The Z channel is for recording the height of the pen tip above the writing plane.

The unit of measurement is millimetres (mm). To restore the actual values, the integer values given in the record body are to be divided by a scaling value given in the channel description. By choosing appropriate scaling values, different degrees of accuracy can be expressed.

7.3 Pen tip velocity channels: VX, VY

The VX channel is for recording the pen tip velocity along the x-axis. The VY channel is for recording the pen tip velocity along the y-axis.

The unit of measurement is millimetres per second (mm/s). To restore the actual values, the integer values given in the record body are to be divided by a scaling value given in the channel description. By choosing appropriate scaling values, different degrees of accuracy can be expressed.

7.4 Pen tip acceleration channels: AX, AY

The AX channel is for recording the pen tip acceleration along the x-axis. The AY channel is for recording the pen tip acceleration along the y-axis.

The unit of measurement is millimetres per square second (mm/s²). To restore the actual values, the integer values given in the record body are to be divided by a scaling value given in the channel description. By choosing appropriate scaling values, different degrees of accuracy can be expressed.

7.5 Time channel: T

The T channel is for recording the time elapsed since the first sample.

The unit of measurement is seconds (s). To restore the actual values, the integer values given in the record body are to be divided by a scaling value given in the channel description. By choosing appropriate scaling values, different degrees of accuracy can be expressed.

7.6 Time difference channel: DT

The DT channel is for recording the time elapsed since the previous sample point.

The unit of measurement is seconds (s). To restore the actual values, the integer values given in the record body are to be divided by a scaling value given in the channel description. By choosing appropriate scaling values, different degrees of accuracy can be expressed.

In case of uniform sampling, the channel inclusion field (see [8.3.2.8.1](#)) in the representation header should indicate the DT channel as present, but the DT channel values should be absent in the representation body while the channel description preamble (see [8.3.2.8.2](#)) for the DT channel indicates the time differences between adjacent sample points as constant.

7.7 Pen tip force channel: F

The F channel is for recording the magnitude of the pen tip force.

The unit of measurement is Newton (N). To restore the actual values, the integer values given in the record body are to be divided by a scaling value given in the channel description. By choosing appropriate scaling values, different degrees of accuracy can be expressed.

NOTE The direction of the pen-tip force depends on the capture device technology, which is identified by the capture device technology identifier.

7.8 Pen tip switch state channel: S

The S channel is for recording whether the pen tip touches the writing plane or not. The value shall be 0 in the case that the pen tip does not touch the writing plane. In case of pen-down events, the value shall also be 0. The value shall be 1 in the case that the pen tip touches the writing plane. In case of pen-up events, the value shall also be 1.

NOTE Temporarily maintaining a value of 0 when the pen tip starts touching the writing plane allows a recognition of pen-down events even if the capture device provides no sample points for pen-up strokes.


7.9 Pen orientation channels: TX, TY, A, E, R

There are five channels defined for recording pen orientation data. The A channel is for recording the pen azimuth. The E channel is for recording the pen elevation. The TX channel is for recording the pen tilt along the x-axis. The TY channel is for recording the pen tilt along the y-axis. The R channel is for recording the rotation of the pen about its longitudinal axis. It may be chosen to use:

- pen azimuth and pen elevation, or
- pen tilt along the x and y-axes,


with or without the pen rotation. For illustrations see [Figure 2](#) and [Figure 3](#).

The unit of measurement for the pen orientation angles is degree (°). To restore the actual values, the integer values given in the record body are to be divided by a scaling value given in the channel description. By choosing appropriate scaling values, different degrees of accuracy can be expressed.

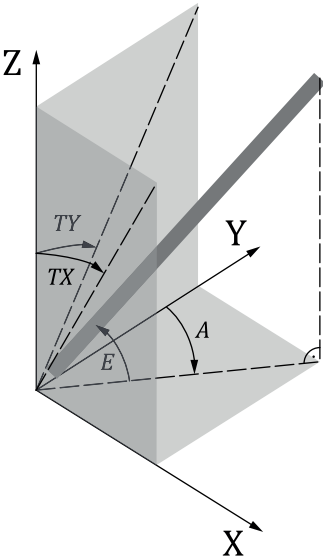

- Key**
- A pen azimuth
 - E pen elevation
 - TX pen tilt along the x-axis
 - TY pen tilt along the y-axis

Figure 2 — Pen orientation angles

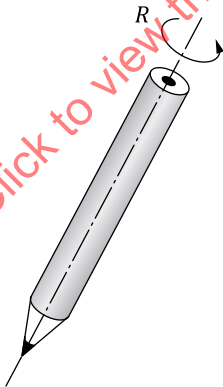

- Key**
- R rotation of the pen about its longitudinal axis

Figure 3 — Pen rotation

8 Binary full format

8.1 Record organization

A signature/sign time series data record in the full format shall consist of the following data elements in the given order:

- a general header, containing descriptive information about the structure and contents of the data record, and
- a record body, containing at least one signature/sign representation.

[Figure 4](#) depicts a signature/sign time series data record in full format. The solid boxes indicate fields that shall be present. The dashed boxes indicate optional fields. The length of each field in bytes is indicated in parentheses at the bottom of the corresponding box. The ellipses indicate that more fields of the same format may follow.

[D.1](#) contains an encoding example in binary full format.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 19794-7:2021

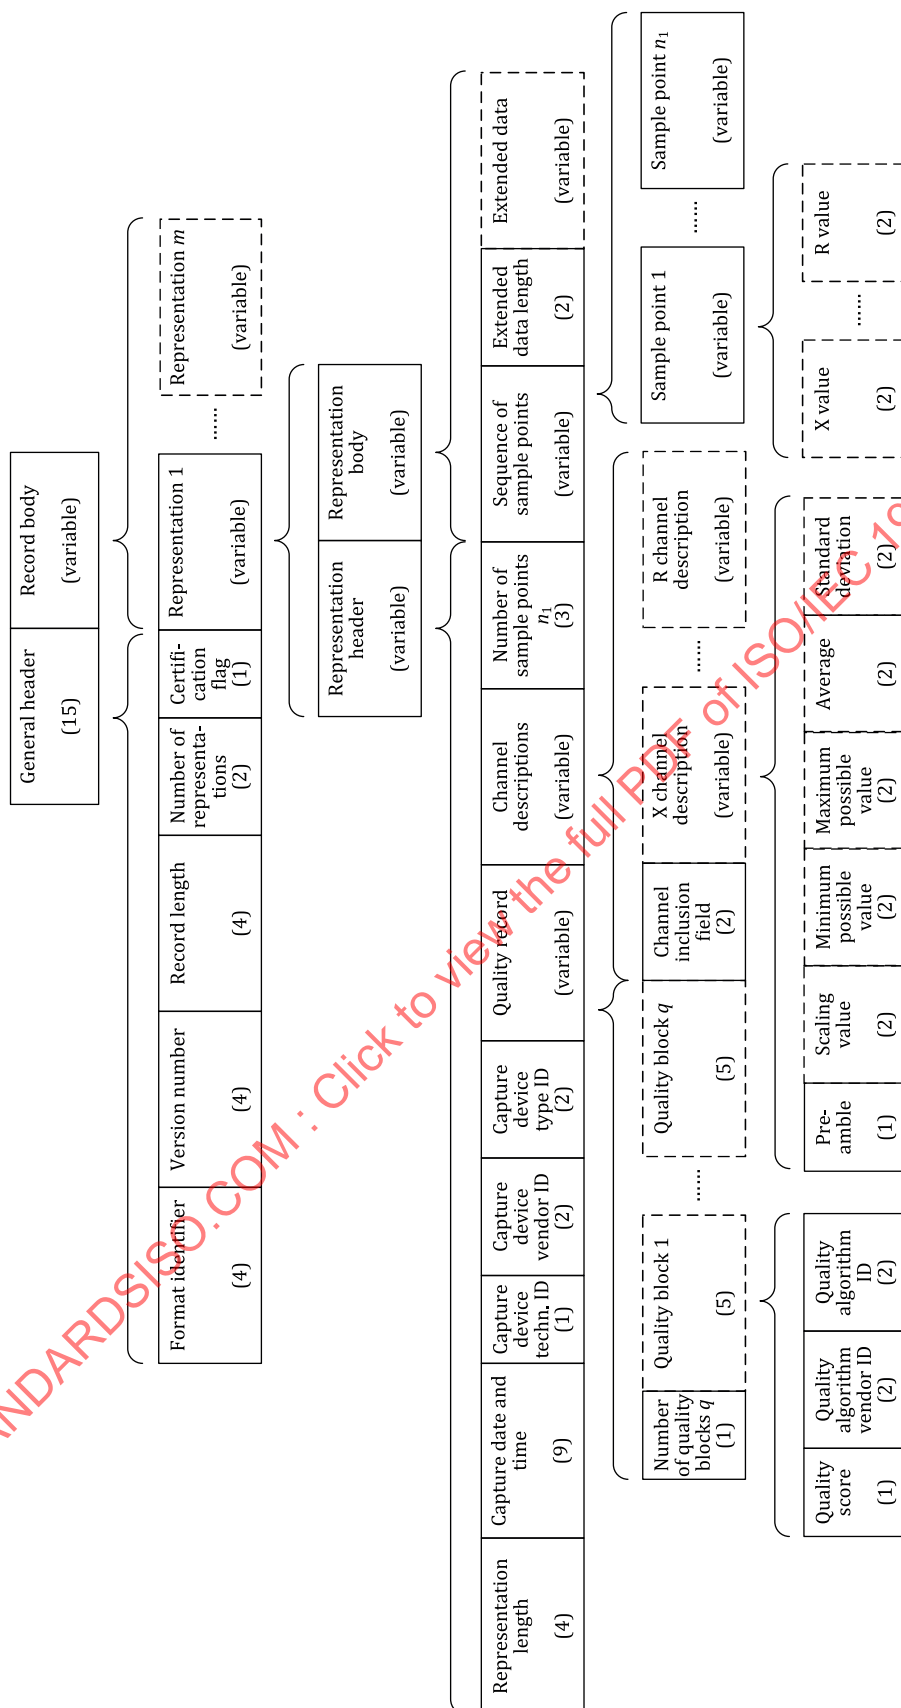


Figure 4 — Binary full format

8.2 General header

8.2.1 Structure

The general header shall contain information applicable to all signature/sign representations. The general header shall consist of the following data elements in the given order:

- a format identifier,
- a version number,
- the length of the data record,
- a field indicating the number of subsequent signature/sign representations, and
- a certification flag.

8.2.2 Format identifier

The format identifier shall be recorded in four bytes. The format identifier shall consist of the three ASCII characters "SDI" (534449_{Hex}) followed by Null (00_{Hex}) as a string terminator.

8.2.3 Version number

The number of the version of this document shall be placed in four bytes. This version number shall consist of three ASCII characters followed by Null (00_{Hex}) as a string terminator. The first and second characters represent the major revision number and the third character represents the minor revision number.

In a signature/sign time series data record following the second edition of this document, the version number shall be 3032 3000_{Hex}, i.e. "020" (an ASCII '0' followed by an ASCII '2' and an ASCII '0') followed by Null (00_{Hex}) as a string terminator.

In a signature/sign time series data record following this third edition of this document, the version number shall be 3032 3100_{Hex}, i.e. "021" (an ASCII '0' followed by an ASCII '2' and an ASCII '1') followed by Null (00_{Hex}) as a string terminator.

8.2.4 Length of the data record

The length in bytes of the entire BDIR (biometric data interchange record) shall be recorded in four bytes. This count shall be the total length of the BDIR including the general header and one or more representation records.

8.2.5 Number of representations

The total number of representation records contained in the BDIR shall be recorded in two bytes. A minimum of one representation is required.

8.2.6 Certification flag

The one-byte certification flag indicates whether each representation header includes a certification record. Its value shall be 00_{Hex} to indicate that no representation contains a certification record.

NOTE The certification flag has been added for upward compatibility with later versions of the full format in which representation headers can contain certification records.

8.3 Record body

8.3.1 Structure

The record body shall consist of a sequence of at least one signature/sign representation. Each signature/sign representation shall consist of the following data elements in the given order:

- a representation header, and
- a representation body.

8.3.2 Representation header

8.3.2.1 Structure

A signature/sign representation header shall contain representation-specific descriptive information. A representation header shall consist of the following data elements in the given order:

- a representation-length field,
- the capture date and time,
- a capture device technology identifier,
- a capture device vendor identifier,
- a capture device type identifier,
- a quality record,
- a sequence of channel descriptions, and
- a field indicating the number of sample points.

8.3.2.2 Length of the signature/sign representation

The four-byte representation-length field denotes the length in bytes of the representation including the representation header.

8.3.2.3 Capture date and time

The capture date and time field shall indicate when the capture of this representation started in Coordinated Universal Time (UTC). The capture date and time field shall consist of 9 bytes. Its value shall be encoded in the form given in ISO/IEC 19794-1.

8.3.2.4 Capture device technology identifier

The capture device technology ID shall be encoded in one byte. This field shall indicate the class of capture device technology used to acquire the captured biometric sample. A value of 00_{Hex} indicates unknown or unspecified technology. See [Table 3](#) for the list of possible values.

Table 3 — Signature/sign capture device technology identifiers

Identifier	Capture device technology
00 _{Hex}	Unknown or unspecified
01 _{Hex}	Electromagnetic
02 _{Hex}	Semiconductor
04 _{Hex}	Special pen with acceleration sensors

Table 3 (continued)

Identifier	Capture device technology
08 _{Hex}	Special pen with optical sensors
all others	Reserved by ISO/IEC JTC 1/SC 37 for future use

8.3.2.5 Capture device vendor identifier

The capture device vendor identifier shall identify the biometric organization that owns the product that created the BDIR. The capture device vendor identifier shall be encoded in two bytes carrying a CBEFF biometric organization identifier (registered by IBIA or other approved registration authority). A value of all zeros shall indicate that the capture device vendor is unreported.

8.3.2.6 Capture device type identifier

The capture device type identifier shall identify the product type that created the BDIR. It shall be assigned by the registered product owner or other approved registration authority. Registered product types shall include all valid combinations of writing tablet and pen as a single product where applicable. A value of all zeros shall indicate that the capture device type is unreported. If the capture device vendor identifier is 0000_{Hex}, then also the capture device type identifier shall be 0000_{Hex}.

8.3.2.7 Quality record

The quality record shall consist of a length field followed by zero or more quality blocks. The length field shall consist of one byte. It shall represent the number of quality blocks as an unsigned integer.

Each quality block shall consist of:

- a quality score,
- a quality algorithm vendor identifier, and
- a quality algorithm identifier.

A quality score should express the predicted comparison performance of a representation. A quality score shall be encoded in one byte as an unsigned integer. Allowed values are:

- 0 to 100 with higher values indicating better quality,
- 255, i.e. ff_{Hex}, for indicating that an attempt to calculate a quality score failed.

The quality algorithm vendor identifier shall identify the provider of the quality algorithm. The quality algorithm vendor identifier shall be encoded in two bytes carrying a CBEFF biometric organization identifier (registered by IBIA or other approved registration authority). A value of all zeros shall indicate that the quality algorithm vendor is unreported.

The quality algorithm identifier shall identify the vendor's quality algorithm that created the quality score. It shall be assigned by the provider of the quality algorithm or an approved registration authority. The quality algorithm identifier shall be encoded in two bytes. A value of all zeros shall indicate that the quality algorithm is unreported.

8.3.2.8 Channel descriptions

8.3.2.8.1 Channel inclusion field

The channel descriptions field shall begin with a channel inclusion field indicating the presence or absence of channels.

The channel inclusion field shall consist of two bytes. Each bit shall correspond to a channel as shown in Table 4. A bit value of 1 shall encode the presence of the corresponding channel; a bit value of 0 shall encode the absence of the corresponding channel.

Table 4 — Format of the channel inclusion field

Channel name	Octet	Bit position
X	1	8 (msb)
Y		7
Z		6
VX		5
VY		4
AX		3
AY		2
T		1 (lsb)
DT	2	8 (msb)
F		7
S		6
TX		5
TY		4
A		3
E		2
R		1 (lsb)

The channel inclusion field shall be followed by a sequence of channel descriptions for the channels indicated as present in the channel inclusion field. The order of the channel descriptions is determined by the order of indicated inclusion within the channel inclusion field starting with the X channel. The channel descriptions are mandatory for all channels present in the signature/sign time series data record.

EXAMPLE Figure 5 shows the channel inclusion field for signature/sign time series data including the channels X, Y, T, F, S, A, E and R.

Octet 1								Octet 2							
1	1	0	0	0	0	0	1	0	1	1	0	0	1	1	1

Figure 5 — Example of a channel inclusion field

8.3.2.8.2 Channel description preamble

Each channel description shall begin with a preamble. Each channel description preamble shall consist of one byte.

Each of the bits 4 through 8 of a channel description preamble shall correspond to a channel attribute as shown in Table 5. A bit value of 1 shall encode the presence of the corresponding channel attribute; a bit value of 0 shall encode the absence of the corresponding channel attribute. If any of the bits 4 through 8 of a channel description preamble are set to 1, the preamble shall be followed by a sequence of channel attributes in the same order as indicated in the preamble starting with the scaling value.

Table 5 — Format of a channel description preamble

Channel attribute	Bit position
Scaling value	8 (msb)

Table 5 (continued)

Channel attribute	Bit position
Minimum possible channel value	7
Maximum possible channel value	6
Average of the channel values	5
Standard deviation of the channel values	4
Constant value	3
Removal of the linear component with respect to time	2
Reserved by ISO/IEC JTC 1/SC 37 for future use	1 (lsb)

A value of 1 for bit 3 of a channel description preamble shall indicate that the value of this channel is constant. If bit 3 of a channel description preamble is set to 1, then this channel shall be absent in the representation body even though the representation header indicates the presence of the channel. If the channel description contains a scaling value, then the constant value of this channel shall be 1 divided by the scaling value.

EXAMPLE 1 Bit 3 of the DT channel description preamble can be used to indicate a uniform sampling rate.

NOTE 1 For all other channels except the DT channel, bit 3 of the channel description preamble is usually 0.

A value of 1 for bit 2 of a channel description preamble shall indicate that the linear component of the regression line for this channel has been removed from this channel.

EXAMPLE 2 Bit 2 of the X channel description preamble can be used to indicate that the linear component of the X-on-T regression line (which can be present due to writing along a horizontal line) has been removed from the X channel in order to map the X values to a smaller range.

NOTE 2 Since the removal of a linear trend with respect to time is not practically relevant for the time channel, the value of 1 should not be used for bit 2 of the channel description preamble of the T channel.

The unused trailing bit of the preamble shall have value 0 and is reserved by ISO/IEC JTC 1/SC 37 for future use.

8.3.2.8.3 Scaling value

If present, scaling values shall consist of two bytes. The five most significant bits of the first byte shall constitute the exponent field, E , and the remaining eleven bits shall constitute the fraction field, F .

The exponent field, E , contains an unsigned integer representing the base 2 exponent of the scaling value biased by 16. For the exponent, signed integer values in the range from -16 to 15 are possible. For encoding the exponent value, 16 is to be added in order to get an unsigned value. For decoding the exponent value, 16 is to be subtracted from the contents of E .

The fraction field, F , contains the bit field that lies, in binary notation, to the right of the leading bit and the binary point of the scaling value's coefficient lying in the range $1 \leq \text{coefficient} < 2$.

The scaling value, s , is calculated using [Formula \(1\)](#):

$$s = \left(1 + \frac{F}{2^{11}} \right) \cdot 2^{E-16} \quad (1)$$

EXAMPLE $s = 1$ is represented by a value of 00_{Hex} in the fraction field, F , and a value of 10_{Hex} in the exponent field, E .

The scaling value has a range from 2^{-16} to $\left(1 + \frac{2047}{2048} \right) \cdot 2^{15}$, i.e. from 0,000 015 258 789 062 5 to 65 520.

The channel values in the representation body as well as the minimum, maximum, and average channel values and the standard deviation in the representation header are to be divided by the corresponding scaling value to obtain their actual values.

If the scaling value is absent, the calibration of the corresponding channel is unknown.

8.3.2.8.4 Minimum and maximum possible channel values

If present, the minimum and maximum possible channel values shall indicate the scaled range of values that the deployed capture device may deliver for the corresponding channel.

For the minimum and maximum possible channel values of the Z, T, DT, F, A, E and R channels, integer values in the range from 0 to 65 535 are allowed. These values shall be encoded in two bytes as unsigned integers.

For the minimum and maximum possible channel values of the X, Y, VX, VY, AX, AY, TX, and TY channels, integer values in the range from -32 768 to 32 767 are allowed. These values shall be encoded in two bytes as unsigned integers after adding 32 768 to each value. Hence, for non-negative numbers, bit 8 of the most significant byte has the value 1; for negative numbers, bit 8 of the most significant byte has the value 0. For decoding these values, 32 768 is to be subtracted from each recorded value.

8.3.2.8.5 Average and standard deviation of the channel values

If present, the average of the channel values shall be the arithmetic mean $\bar{c}$, rounded to the nearest integer, of all values c_i ($1 \leq i \leq N$ where N is the number of sample points) for the corresponding channel within a signature/sign time series data record, according to [Formula \(2\)](#):

$$\bar{c} = \frac{1}{N} \sum_{i=1}^N c_i \quad (2)$$

If present, the standard deviation of the channel values shall be the empirical standard deviation σ_c , rounded to the nearest integer, of all values c_i ($1 \leq i \leq N$) for the corresponding channel within a signature/sign time series data record, according to [Formula \(3\)](#):

$$\sigma_c = \sqrt{\frac{1}{N} \sum_{i=1}^N (c_i - \bar{c})^2} \quad (3)$$

For the averages of the Z, T, DT, F, A, E and R channels, as well as for the standard deviations of all channels, integer values in the range from 0 to 65 535 are allowed. These values shall be encoded in two bytes as unsigned integers.

For the averages of the X, Y, VX, VY, AX, AY, TX and TY channels, integer values in the range from 32 768 to 32 767 are allowed. These values shall be encoded in two bytes as unsigned integers after adding 32 768 to each value. Hence, for non-negative numbers, bit 8 of the most significant byte has the value 1; for negative numbers, bit 8 of the most significant byte has the value 0. For decoding these values, 32 768 is to be subtracted from each recorded value.

NOTE The average and the standard deviation values provide information as to whether and to which range the signature/sign data has been transformed for facilitating comparison.

EXAMPLE The averages of the X and Y channels provide information as to whether the signature/sign data has been translated and rotated for facilitating comparison. If present, the standard deviation values of the X and Y channels provide information about the range to which the signature/sign data has been normalized and scaled for facilitating comparison.

8.3.2.9 Number of sample points

The length field shall indicate the number of sample points. The length field shall consist of three bytes, representing the number of sample points as an unsigned integer.

8.3.3 Representation body

8.3.3.1 Structure

A signature/sign representation body shall consist of:

- a sequence of sample point fields, each consisting of a sequence of channel values, and
- an extended data length field followed by optional extended data.

8.3.3.2 Sequence of sample points

Each sample point field shall consist of a sequence of selected channel values as indicated by the channel inclusion field in the representation header. The order of the channel values is determined by the order of indicated inclusion within the channel inclusion field ([Table 4](#)).

For the Z, T, DT, F, A, E, and R channels, integer values in the range from 0 to 65 535 are allowed. These values shall be encoded in two bytes as unsigned integers.

For the X, Y, VX, VY, AX, AY, TX, and TY channels, integer values in the range from –32 768 to 32 767 are allowed. These values shall be encoded in two bytes as unsigned integers, after adding 32 768 to each value. Hence, for non-negative numbers, bit 8 of the most significant byte has the value 1; for negative numbers, bit 8 of the most significant byte has the value 0. For decoding these values, 32 768 is to be subtracted from each recorded value.

For the S channel, the integer values 0 and 1 are allowed. These values shall be encoded in one byte as unsigned integers.

8.3.3.3 Extended data length

The extended data length field shall indicate the number of bytes in the extended data field. The length field shall consist of two bytes, representing the number of subsequent bytes as an unsigned integer. Values in the range from 0 to 65 535 are allowed.

8.3.3.4 Extended data

The optional extended data field allows for inclusion of additional data that may be used by comparison algorithms. The structure of the extended data field is not prescribed by this document. If extended data is present and the comparison algorithm does not recognize its format, the algorithm shall ignore it.

NOTE Comparison algorithms claiming to use data records conforming to the full format defined in this document should be capable of achieving equivalent biometric performance in terms of error rates when processing data records without extended data and when processing data records with extended data.

9 Binary compact format

9.1 Record organization

The compact format of signature/sign time series data is for use with smart cards and other tokens. Its areas of application include both off-card and on-card comparison.

The compact format of signature/sign time series data is more compact than the full format defined in [Clause 8](#). A signature/sign time series data record in compact format contains a single signature/

sign representation; it does not contain a header and encodes each channel value within one byte only. Information about the structure and contents of the data record that otherwise would be given in the channel descriptions within the header is contained in a separate comparison algorithm parameters data object as defined in 9.2.

Figure 6 depicts the body of a signature/sign time series data record in compact format. The solid boxes indicate fields that shall be present. The dashed boxes indicate optional fields. The length of each field in bytes is indicated in parentheses at the bottom of the corresponding box. The ellipses indicate that more fields of the same format may follow.

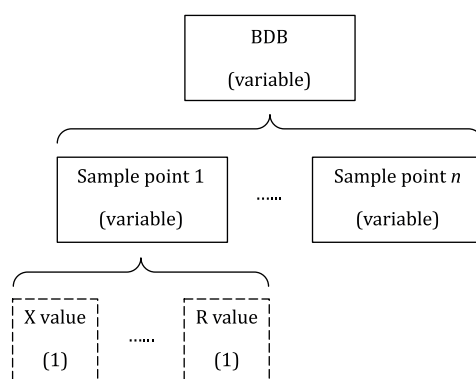


Figure 6 — Binary compact format

The informative Annex C specifies the abstract syntax of the binary compact format in ASN.1^[1]. D.2 contains an encoding example in binary compact format.

9.2 Comparison algorithm parameters template

9.2.1 Structure

The comparison algorithm parameters data object may be embedded in a biometric header template (BHT), which is again embedded in a biometric information template (BIT) as defined in the TLV-encoded CBEFF patron format for use with smart cards or other tokens defined in ISO/IEC 19785-3.

The structure of a comparison algorithm parameters data object is shown in Table 6. Its tag is defined in ISO/IEC 19785-3 as B1_{Hex}. The length fields shall be encoded following the Distinguished Encoding Rules of ASN.1 defined in ISO/IEC 8825-1. Its contents may be a sequence of channel descriptions as defined in 9.2.3 and the maximum number of sample points that the comparison algorithm is able to process as defined in 9.2.2.

Table 6 — Structure of a comparison algorithm parameters data object for signature/sign time series data

Tag	Length	Value			Presence
B1 _{Hex}	variable				
		Tag	Length	Value	
		81 _{Hex}	variable	Minimum and maximum number of sample points as defined in 9.2.2	optional
		86 _{Hex}	variable	Sequence of channel descriptions as defined in 9.2.3	optional

9.2.2 Minimum and maximum number of sample points

If there is a lower and an upper limit to the number of sample points, the minimum and maximum number of sample points that the comparison algorithm is able to process may be indicated in the comparison algorithm parameters data object. The minimum number of sample points shall be encoded

in one byte as an unsigned integer, directly followed by the maximum number of sample points encoded as an unsigned integer, in as few bytes as possible (without leading zeros).

NOTE ISO/IEC 24787 recommends 81_{Hex} as tag for this data object.

9.2.3 Channel descriptions

9.2.3.1 Channel inclusion field

If present, the sequence of channel descriptions shall begin with a channel inclusion field as defined in [8.3.2.8.1](#).

9.2.3.2 Channel description preamble

The channel inclusion field shall be followed by a sequence of channel descriptions for the channels indicated as present in the channel inclusion field. The order of the channel descriptions is determined by the order of indicated inclusion within the channel inclusion field ([Table 4](#)) starting with the X channel if present. The channel descriptions are mandatory for all channels present in the signature/sign time series data record.

Each channel description shall begin with a preamble as defined in [8.3.2.8.2](#).

If any of the bits 4 through 8 of a channel description preamble are set to 1, the preamble shall be followed by a sequence of channel attributes in the same order as indicated in the preamble starting with the scaling value.

9.2.3.3 Scaling value

If present, the meaning and encoding of the scaling values shall be as defined in [8.3.2.8.3](#).

9.2.3.4 Minimum and maximum possible channel values

If present, the meaning of the minimum and maximum possible channel values shall be as defined in [8.3.2.8.4](#).

For the minimum and maximum possible channel values of the Z, T, DT, F, A, E and R channels, integer values in the range from 0 to 255 are allowed. These values shall be encoded in one byte as unsigned integers.

For the minimum and maximum possible channel values of the X, Y, VX, VY, AX, AY, TX and TY channels, integer values in the range from -128 to 127 are allowed. These values shall be encoded in one byte as unsigned integers after adding 128 to each value. Hence, for non-negative numbers, bit 8 of the most significant byte has the value 1; for negative numbers, bit 8 of the most significant byte has the value 0. For decoding these values, 128 is to be subtracted from each recorded value.

9.2.3.5 Average and standard deviation of the channel values

If present, the meaning of the average and of the standard deviation of the channel values shall be as defined in [8.3.2.8.5](#).

For the averages of the Z, T, DT, F, A, E, and R channels as well as for the standard deviations of all channels, integer values in the range from 0 to 255 are allowed. These values shall be encoded in one byte as unsigned integers.

For the averages of the X, Y, VX, VY, AX, AY, TX and TY channels, integer values in the range from 128 to 255 are allowed. These values shall be encoded in one byte as unsigned integers after adding 128 to each value. Hence, for non-negative numbers, bit 8 of the most significant byte has the value 1; for negative numbers, bit 8 of the most significant byte has the value 0. For decoding these values, 128 is to be subtracted from each recorded value.

9.3 Embedment in a CBEFF data structure

According to the TLV-encoded patron format for use with smartcards or other tokens defined in ISO/IEC 19785-3, a signature/sign time series data record shall be encoded as shown in [Table 7](#) or [Table 8](#), depending on whether the signature/sign time series data record contains extended data or not. Its tag shall be 5f2e_{Hex} if there is no extended data, and 7f2e_{Hex} if there is also extended data. Its length shall be encoded following the Distinguished Encoding Rules of ASN.1 defined in ISO/IEC 8825-1. Its contents shall be the body of a signature/sign time series data record as defined in [9.4](#).

Table 7 — Signature/sign time series data record without extended data

Tag	Length	Value
5f2e _{Hex}	variable	Body of a signature/sign time series data record as defined in 9.4

Table 8 — Signature/sign time series data record alongside extended data

Tag	Length	Value									
7f2e _{Hex}	variable										
		<table> <tr> <th>Tag</th><th>Length</th><th>Value</th></tr> <tr> <td>81_{Hex}</td><td>variable</td><td>Body of a signature/sign time series data record as defined in 9.4</td></tr> <tr> <td>82_{Hex} or A2_{Hex}</td><td>variable</td><td>Extended data in proprietary format (of primitive or constructed type)</td></tr> </table>	Tag	Length	Value	81 _{Hex}	variable	Body of a signature/sign time series data record as defined in 9.4	82 _{Hex} or A2 _{Hex}	variable	Extended data in proprietary format (of primitive or constructed type)
Tag	Length	Value									
81 _{Hex}	variable	Body of a signature/sign time series data record as defined in 9.4									
82 _{Hex} or A2 _{Hex}	variable	Extended data in proprietary format (of primitive or constructed type)									

9.4 Record body

The record body consists of a sequence of fields, each of which consists of a sequence of channel values at a particular sample point, for subsequent sample points. For each sample point, the field shall consist of a sequence of selected channel values as indicated by the channel inclusion field in the comparison algorithm parameters data object. The order of the channel values is determined by the order of indicated inclusion within the channel inclusion field ([Table 4](#)).

For the Z, T, DT, F, A, E and R channels, integer values in the range from 0 to 255 are allowed. These values shall be encoded in one byte as unsigned integers. In the compact format, the T channel shall contain time data relative to the preceding sample.

For the X, Y, VX, VY, AX, AY, TX and TY channels, integer values in the range from -128 to 127 are allowed. These values shall be encoded in one byte as unsigned integers after adding 128 to each value. Hence, for non-negative numbers, bit 8 has the value 1; for negative numbers, bit 8 has the value 0. For decoding these values, 128 is to be subtracted from each recorded value.

For the S channel, the integer values 0 and 1 are allowed. These values shall be encoded in one byte as unsigned integers.

10 Binary compression format

10.1 Record organization

The compression format of signature/sign time series data is for use within applications where both, data record size and algorithm performance in terms of error rates, are important factors (for example, smart cards and other tokens) and also within applications where the data transmission speed can be slow.

The compression format has the advantage of smaller data size due to lossless data compression. As an inconvenience, it requires uncompressing the data in order to use them.

A signature/sign time series data record in the compression format shall consist of the following data elements in the given order:

- a general header, containing descriptive information about the structure and contents of the data record,
- and a record body, containing at least one signature/sign representation.

[Figure 7](#) depicts a signature/sign time series data record in compression format. The solid boxes indicate fields that shall be present. The dashed boxes indicate optional fields. The length of each field in bytes is indicated in parentheses at the bottom of the corresponding box. The ellipses indicate that more fields of the same format may follow.

[D.3](#) contains an encoding example in binary compression format.

10.2 General header

The general header shall be as defined in [8.2](#) with the exception of the format identifier. The format identifier shall consist of the three ASCII characters “SCD” (534344_{Hex}) followed by Null (00_{Hex}) as a string terminator.

10.3 Record body

10.3.1 Structure

The record body shall consist of a sequence of at least one signature/sign representation. Each signature/sign representation shall consist of the following data elements in the given order:

- a representation header and
- a representation body.

10.3.2 Representation header

10.3.2.1 Structure

A representation header shall contain representation-specific descriptive information. A representation header shall consist of the following data elements in the given order:

- a representation-length field,
- the capture date and time,
- a capture device technology identifier,
- a capture device vendor identifier,
- a capture device type identifier,
- a quality record,
- a sequence of channel descriptions,
- a field indicating the number of sample points,
- a compression algorithm identifier field, and
- a field indicating the length of the compressed data.

The meaning and encoding of the representation-length field, the capture date and time field, the capture device technology identifier, the capture device vendor identifier, the capture device type

identifier, the quality record, the channel descriptions and the number-of-sample-points field shall be as defined in [8.3.2](#). The scaling values given in the channel descriptions shall be set in such a way that the differences are mapped to a range of values as small as possible without loss of information.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 19794-7:2021

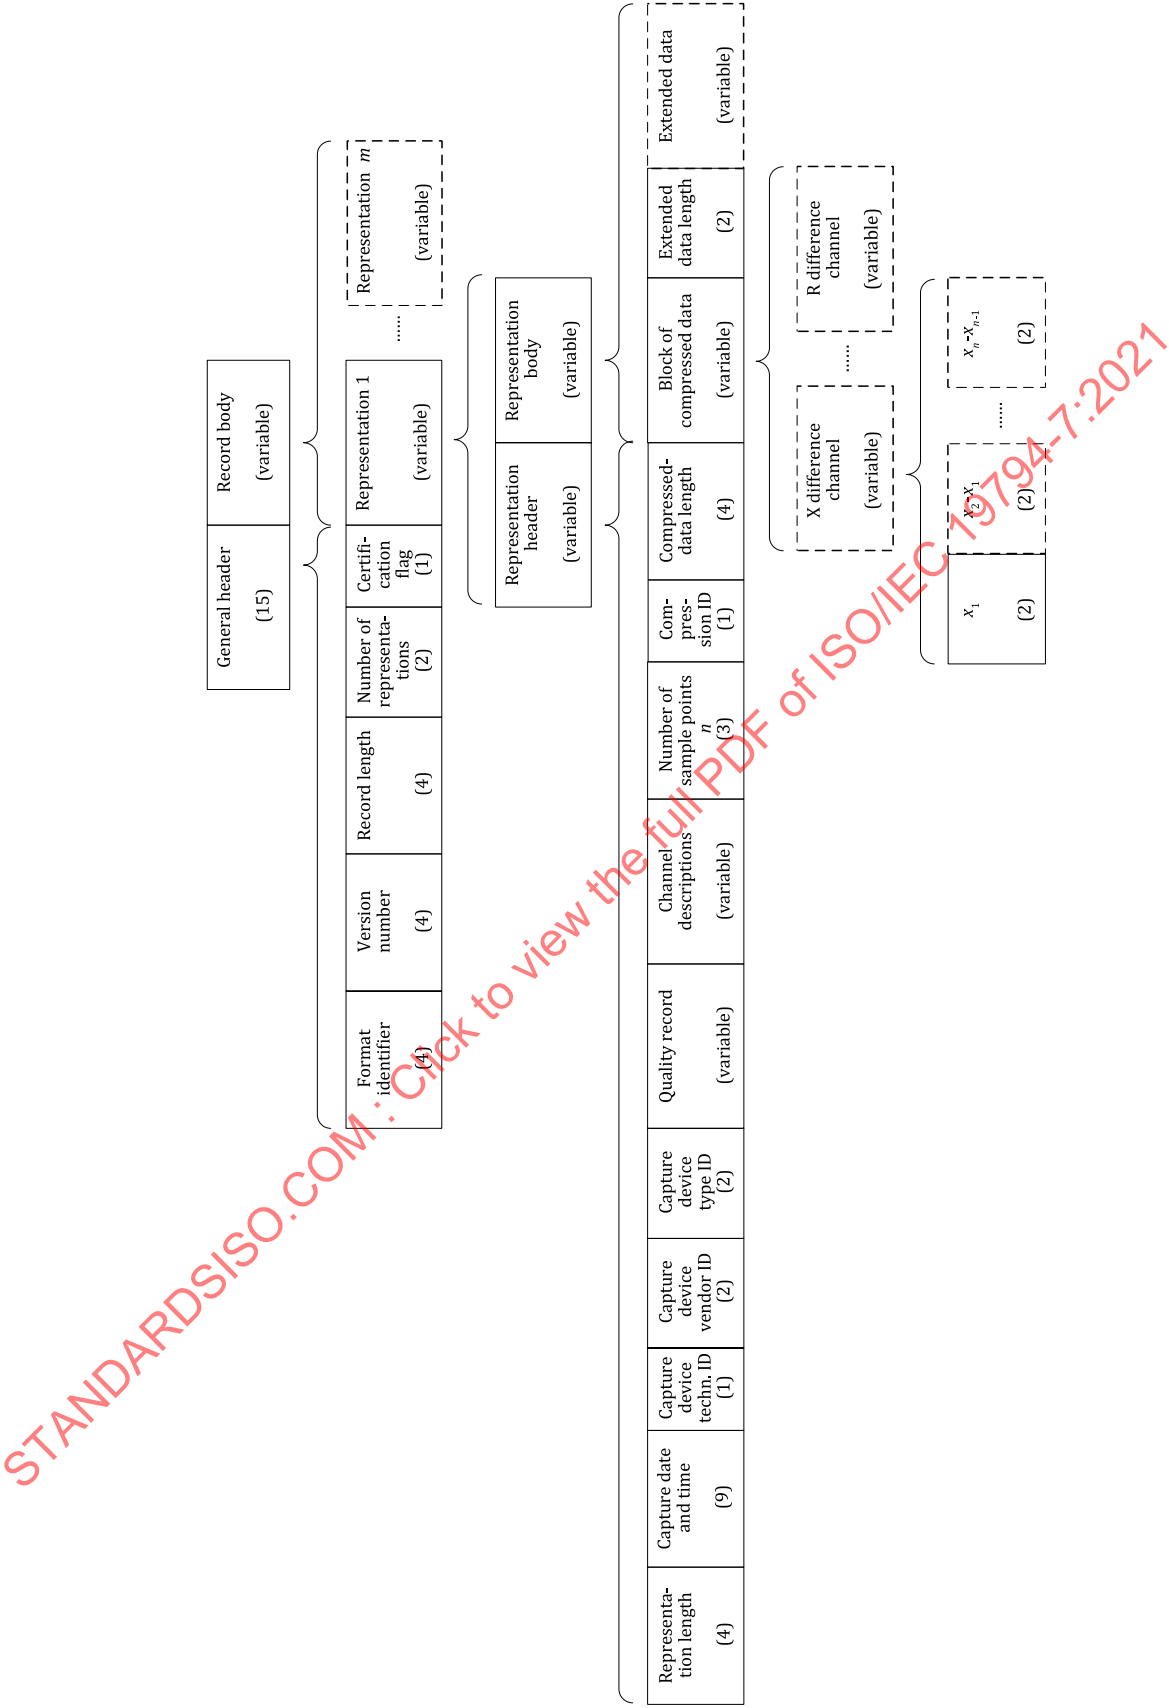


Figure 7 — Binary compression format

10.3.2.2 Compression algorithm identifier

The compression algorithm identifier shall identify the compression algorithm used. The compression algorithm identifier shall be encoded in one byte. See [Table 9](#) for the list of possible values.

Table 9 — Compression algorithm identifiers

Identifier	Compression algorithm
00 _{Hex}	Bzip2 ^[9]
01 _{Hex}	LZW ^[10]
02 _{Hex}	GZip ^[11]
03 _{Hex}	Deflate ^[12]
05 _{Hex}	PPMd ^[13]
06 _{Hex}	LZMA ^[14]
08 _{Hex}	Zip ^[15]
all others	Reserved by ISO/IEC JTC 1/SC 37 for future use

10.3.2.3 Length of the compressed data

The compressed-data length field shall denote the total number of bytes in the compressed data. The compressed-data length field shall consist of four bytes.

10.3.3 Representation body

10.3.3.1 Structure

A signature/sign representation body in compression format shall consist of:

- a block of compressed data, and
- an extended data length field followed by optional extended data.

The data to be compressed shall consist of a sequence of difference channels, one for each channel that is indicated as present by the channel inclusion field in the representation header. A difference channel shall be encoded as described in [10.3.3.2](#). The sequence of difference channels shall be compressed using the compression algorithm indicated by the compression algorithm identifier field in the representation header.

10.3.3.2 Sequence of channels

The compression format for signature/sign time series data shall store the data acquired from the input device as a sequence of difference channels instead of as a sequence of sample points as defined in full format.

Every difference channel shall start with the initial value c_1 of the channel, encoded as defined in [8.3.3.2](#). This is followed by a sequence of differences between values at consecutive sample points $d_i = c_{i+1} - c_i$ ($1 \leq i \leq N-1$). Each d_i shall be encoded in two bytes as an unsigned integer after adding 32 768.

10.3.3.3 Extended data length

The extended data length field shall be as defined in [8.3.3.3](#).

10.3.3.4 Extended data

The extended data field shall be as defined in [8.3.3.4](#).

11 XML encoding

An XML document encoding signature/sign time series data shall obey the XML schema definition given in [Annex E](#). The XML schema definition in [E.2](#) conforms to XML Schema Parts 1^[16] and 2^[17] and ISO/IEC 19794-1. [Annex F](#) contains an XML encoding example.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 19794-7:2021

Annex A (normative)

Conformance testing methodology

A.1 Table of requirements

The normative requirements of the main body of this document are listed in [Table A.1](#). The supplier of the IUT should use [Table A.1](#) to explain which optional components of this document are supported and the testing laboratory should use [Table A.1](#) to note the results of the test.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 19794-7:2021

Table A.1 — Table of requirements

Requirement ID	Subclause reference	Requirement summary	Level	Status	Applicable to format type				IUT support	Supported range	Test result
					Full	Compact	Compression	XML			
R1	6.1	The coordinate system used to express the pen position shall be a three-dimensional Cartesian coordinate system.	3B	M	Y	Y	Y	Y		N/A	
R2	6.1	The x-axis shall be the horizontal axis of the writing plane, with x-coordinates increasing to the right.	3B	M	Y	Y	Y	Y		N/A	
R3	6.1	The y-axis shall be the vertical axis of the writing plane, with y-coordinates increasing upwards.	3B	M	Y	Y	Y	Y		N/A	
R4	8.2.2	The format ID shall be recorded in four bytes. The format ID shall consist of three characters "SDI" followed by Null (00 _{hex}) as a string terminator.	1	M	Y	N	N	N			
R5	10.2	The format ID shall be recorded in four bytes. The format ID shall consist of three characters "SCD" followed by Null (00 _{hex}) as a string terminator.	1	M	N	N	Y	N			
R6	8.2.3 , 10.2	The number for the version of this document shall be placed in four bytes. The version number shall consist of the three characters "021" followed by Null as a string terminator (3032 3100 _{hex}).	1	M	Y	N	Y	N			
R7	8.2.4 , 10.2	The length (in bytes) of the entire BDIR shall be recorded in four bytes. This count shall be the total length of the BDIR including the general record header and one or more representation records.	2	M	Y	N	Y	N			
R8	8.2.5 , 10.2	The total number of representation records contained in the BDIR shall be recorded in two bytes. A minimum of one representation is required.	2	M	Y	N	Y	N			
R9	8.2.6 , 10.2	The one-byte certification flag shall indicate whether each representation header includes a certification record. A value of 00 _{hex} shall indicate that no representation contains a certification record. A value of 01 _{hex} shall indicate that all representations contain a certification record.	2	M	Y	N	Y	N			
R10	8.3.1 , 10.3.1	A representation header shall precede each representation providing information for that representation. There shall be one header for each representation contained in the BDIR.	1	M	Y	N	Y	N			
R11	8.3.2.2 , 10.3.2.1	The total number of bytes in the entire representation, including the representation header, shall be recorded in four bytes.	2	M	Y	N	Y	N			
R12	8.3.2.3 , 10.3.2.1	The Gregorian calendar year of the capture date and time field shall be encoded in the form given in ISO/IEC 19794-1.	1	M	Y	N	Y	N			
R13	8.3.2.3 , 10.3.2.1	The month of the capture date and time field shall be encoded in the form given in ISO/IEC 19794-1.	1	M	Y	N	Y	N			
R14	8.3.2.3 , 10.3.2.1	The day of the capture date and time field shall be encoded in the form given in ISO/IEC 19794-1.	1	M	Y	N	Y	N			
R15	8.3.2.3 , 10.3.2.1	The hour of the capture date and time field shall be encoded in the form given in ISO/IEC 19794-1.	1	M	Y	N	Y	N			
R16	8.3.2.3 , 10.3.2.1	The minute of the capture date and time field shall be encoded in the form given in ISO/IEC 19794-1.	1	M	Y	N	Y	N			

Table A.1 (continued)

Requirement ID	Subclause reference	Requirement summary	Level	Status	Applicable to format type				IUT support	Supported range	Test result
					Full	Compact	Compression	XML			
R17	8.3.2.3, 10.3.2.1	The second of the capture date and time field shall be encoded in the form given in ISO/IEC 19794-1.	1	M	Y	N	Y	N			
R18	8.3.2.3, 10.3.2.1	The millisecond of the capture date and time field shall be encoded in the form given in ISO/IEC 19794-1.	1	M	Y	N	Y	N			
R19	8.3.2.3, 10.3.2.1	The capture date and time field shall indicate when the capture of this representation started in Coordinated Universal Time (UTC).	3C	M	Y	N	Y	N			
R20	8.3.2.4, 10.3.2.1	The capture device technology ID shall be encoded in one byte. A value of 00 _{Hex} indicates unknown or unspecified technology. See Table 3 for the list of possible values.	1	M	Y	N	Y	N			
R21	8.3.2.4, 10.3.2.1	The capture device technology ID shall indicate the class of capture device technology used to acquire the captured biometric sample.	3C	M	Y	N	Y	N			
R22	8.3.2.5, 10.3.2.1	The capture device vendor ID shall be encoded in two bytes. A value of all zeros shall indicate that the capture device vendor is unreported.	1	M	Y	N	Y	N			
R23	8.3.2.5, 10.3.2.1	The capture device vendor ID shall be registered by IBIA or other approved registration authority.	3C	M	Y	N	Y	N			
R24	8.3.2.6, 10.3.2.1	The capture device type ID shall be encoded in two bytes. A value of all zeros shall indicate that the capture device type is unreported.	1	M	Y	N	Y	N			
R25	8.3.2.6, 10.3.2.1	The capture device type ID shall be assigned by the registered product owner or other approved registration authority.	3C	M	Y	N	Y	N			
R26	8.3.2.7, 10.3.2.1	A quality record shall begin with a length field. The length field shall consist of one byte. It shall represent the number of quality blocks as an unsigned integer.	2	M	Y	N	Y	N			
R27	8.3.2.7, 10.3.2.1	A quality score shall be encoded in one byte as an unsigned integer. Allowed values are: — 0 to 100 with higher values indicating better quality, — 255, i.e. ff _{Hex} , for indicating that an attempt to calculate a quality score failed.	1	M	Y	N	Y	N			
R28	8.3.2.7, 10.3.2.1	The quality algorithm vendor ID shall be encoded in two bytes. A value of all zeros shall indicate that the quality algorithm vendor is unreported.	1	M	Y	N	Y	N			
R29	8.3.2.7, 10.3.2.1	The quality algorithm vendor ID shall be registered by IBIA or other approved registration authority.	3C	M	Y	N	Y	N			
R30	8.3.2.7, 10.3.2.1	The quality algorithm ID shall be encoded in two bytes. A value of all zeros shall indicate that the quality algorithm is unreported.	1	M	Y	N	Y	N			
R31	8.3.2.7, 10.3.2.1	The quality algorithm ID shall be registered by IBIA or other approved registration authority.	3C	M	Y	N	Y	N			
R32	8.3.2.8.1, 10.3.2.1	The channel inclusion field shall consist of two bytes.	1	M	Y	N	Y	N			

Table A.1 (continued)

Requirement ID	Subclause reference	Requirement summary	Level	Status	Applicable to format type				IUT support	Supported range	Test result
					Full	Compact	Compression	XML			
R33	8.3.2.8.1 , 10.3.2.1	A bit value of 1 in the channel inclusion field shall encode the presence of the corresponding channel; a bit value of 0 shall encode the absence of the corresponding channel. The channel inclusion field shall be followed by a sequence of channel descriptions for the channels indicated as present in the channel inclusion field. The order of the channel descriptions is determined by the order of indicated inclusion within the channel inclusion field starting with the X channel. The channel descriptions are mandatory for all channels present in the signature/sign time series data record.	2	M	Y	N	Y	N			
R34	8.3.2.8.1 , 10.3.2.1	Each bit of the channel inclusion field shall correspond to a channel as shown in Table 4 .	3A	M	Y	N	Y	N			
R35	8.3.2.8.2 , 10.3.2.1	Each channel description shall begin with a preamble. Each channel description preamble shall consist of one byte. The unused trailing bit of the preamble shall have value 0 and is reserved by ISO/IEC JTC 1/SC 37 for future use.	1	M	Y	N	Y	N			
R36	8.3.2.8.2 , 10.3.2.1	Each of the bits 4 through 8 of a channel description preamble shall correspond to a channel attribute as shown in Table 5 . A bit value of 1 shall encode the presence of the corresponding channel attribute; a bit value of 0 shall encode the absence of the corresponding channel attribute. If any of the bits 4 through 8 of a channel description preamble are set to 1, the preamble shall be followed by a sequence of channel attributes in the same order as indicated in the preamble starting with the scaling value.	2	M	Y	N	Y	N			
R37	8.3.2.8.2 , 10.3.2.1	A value of 1 for bit 3 of a channel description preamble shall indicate that the value of this channel is constant. If bit 3 of a channel description preamble is set to 1, then this channel shall be absent in the representation body even though the representation header indicates the presence of the channel. If the channel description of a channel whose value is constant contains a scaling value, then the constant value of this channel shall be 1 divided by the scaling value.	2	M	Y	N	Y	N			
R38	8.3.2.8.2 , 10.3.2.1	If the channel description of a channel whose value is constant contains a scaling value, then the constant value of this channel shall be 1 divided by the scaling value.	3A	M	Y	N	Y	N			
R39	8.3.2.8.2 , 10.3.2.1	A value of 1 for bit 2 of a channel description preamble shall indicate that the linear component of the regression line for this channel has been removed from this channel.	2	M	Y	N	Y	N			
R40	8.3.2.8.3 , 10.3.2.1	If present, scaling values shall consist of two bytes. The five most significant bits of the first byte shall constitute the exponent field, <i>E</i> , and the remaining 11 bits shall constitute the fraction field, <i>F</i> . The scaling value <i>s</i> is calculated by: $s = \left(1 + \frac{F}{2^{11}} \right) \cdot 2^{E-16}$	1	O	Y	N	Y	N			

Table A.1 (continued)

Requirement ID	Subclause reference	Requirement summary	Level	Status	Applicable to format type				IUT support	Supported range	Test result
					Full	Compact	Compression	XML			
R41	8.3.2.8.4, 10.3.2.2.1	If present, the minimum and maximum possible channel values shall be encoded in two bytes.	1	0	Y	N	Y	N			
R42	8.3.2.8.4, 10.3.2.2.1	If present, the minimum and maximum possible channel values shall indicate the scaled range of values that the deployed capture device may deliver for the corresponding channel. For the minimum and maximum possible channel values of the Z, T, DT, F, A, E and R channels, integer values in the range from 0 to 65 535 are allowed. These values shall be encoded in two bytes as unsigned integers. For the minimum and maximum possible channel values of the X, Y, VX, VY, AX, AY, TX and TY channels, integer values in the range from –32 768 to 32 767 are allowed. These values shall be encoded in two bytes as unsigned integers after adding 32 768 to each value. Hence, for non-negative numbers, bit 8 of the most significant byte has the value 1; for negative numbers, bit 8 of the most significant byte has the value 0. For decoding these values, 32 768 is to be subtracted from each recorded value.	3A	0	Y	N	Y	N			
R43	8.3.2.8.3, 10.3.2.2.1	If a scaling value is present, the minimum and maximum possible channel values are to be divided by the corresponding scaling value to obtain their actual values.	3A	0	Y	N	Y	N			
R44	8.3.2.8.5, 10.3.2.2.1	If present, the average of the channel values shall be the arithmetic mean $\bar{c}$ rounded to the nearest integer, of all values c_i ($1 \leq i \leq N$ where N is the number of sample points) for the corresponding channel within a signature/sign time series data record: $\bar{c} = \frac{1}{N} \sum_{i=1}^N c_i$ For the averages of the Z, T, DT, F, A, E and R channels, integer values in the range from 0 to 65 535 are allowed. These values shall be encoded in two bytes as unsigned integers. For the averages of the X, Y, VX, VY, AX, AY, TX and TY channels, integer values in the range from 32 768 to 32 767 are allowed. These values shall be encoded in two bytes as unsigned integers after adding 32 768 to each value. Hence, for non-negative numbers, bit 8 of the most significant byte has the value 1; for negative numbers, bit 8 of the most significant byte has the value 0. For decoding these values, 32 768 is to be subtracted from each recorded value.	2	0	Y	N	Y	N			
R45	8.3.2.8.3, 10.3.2.2.1	If a scaling value is present, the average channel values are to be divided by the corresponding scaling value to obtain their actual values.	3A	0	Y	N	Y	N			

Table A.1 (continued)

Requirement ID	Subclause reference	Requirement summary	Level	Status	Applicable to format type				IUT support	Supported range	Test result
					Full	Compact	Compression	XML			
R46	8.3.2.8.5 , 10.3.2.1	If present, the standard deviation of the channel values shall be the empirical standard deviation σ_c, rounded to the nearest integer, of all values C_i ($1 \leq i \leq N$) for the corresponding channel within a signature/sign time series data record: $\sigma_c = \sqrt{\frac{1}{N} \sum_{i=1}^N (C_i - \bar{c})^2}$ For the standard deviations of all channels, integer values in the range from 0 to 65 535 are allowed. These values shall be encoded in two bytes as unsigned integers.	2	O	Y	N	Y	N			
R47	8.3.2.8.3 , 10.3.2.1	If a scaling value is present, the standard deviation values are to be divided by the corresponding scaling value to obtain their actual values.	3A	O	Y	N	Y	N			
R48	8.3.2.9 , 10.3.2.1	The length field shall consist of three bytes.	1	M	Y	N	Y	N			
R49	8.3.2.9 , 10.3.2.1	The length field shall indicate the number of sample points as an unsigned integer.	2	M	Y	N	Y	N			
R50	10.3.2.2	The compression algorithm ID shall be encoded in one byte. See Table 9 for the list of possible values.	1	M	N	N	Y	N			
R51	10.3.2.3	The compressed-data length field shall consist of four bytes.	1	M	N	N	Y	N			
R52	10.3.2.3	The compressed-data length field shall denote the total number of bytes in the compressed data.	2	M	N	N	Y	N			
R53	8.3.3.2	Each sample point field shall consist of a sequence of selected channel values as indicated by the channel inclusion field. The order of the channel values is determined by the order of indicated inclusion within the channel inclusion field.	2	M	Y	N	N	N			
R54	8.3.3.2	For the Z, T, DT, F, Az, El and R channels, integer values in the range from 0 to 65 535 are allowed. These values shall be encoded in two bytes as unsigned integers.	2	M	Y	N	N	N			
R55	8.3.3.2	For the X, Y, VX, VY, AX, AY, TX and TY channels, integer values in the range from -32 768 to 32 767 are allowed. These values shall be encoded in two bytes as unsigned integers, after adding 32 768 to each value. Hence, for non-negative numbers, bit 8 of the most significant byte has the value 1; for negative numbers, bit 8 of the most significant byte has the value 0. For decoding these values, 32 768 is to be subtracted from each recorded value.	2	M	Y	N	N	N			
R56	8.3.3.2	For the S channel, the values 0 and 1 are allowed. These values shall be encoded in one byte as unsigned integers.	2	M	Y	N	N	N			

Table A.1 (continued)

Requirement ID	Subclause reference	Requirement summary	Level	Status	Applicable to format type				IUT support	Supported range	Test result
					Full	Compact	Compression	XML			
R57	8.3.2.8.3 , 10.3.2.1	If a scaling value is present, the channel values in the representation body are to be divided by the corresponding scaling value to obtain their actual values.	3A	O	Y	N	Y	N			
R58	10.3.3.1	The data to be compressed shall consist of a sequence of difference channels, one for each channel that is indicated as present by the channel inclusion field in the representation header. The sequence of difference channels shall be compressed using the compression algorithm indicated by the compression algorithm ID field in the representation header.	2	M	N	N	Y	N			
R59	10.3.3.2	Every difference channel shall start with the initial value c_1 of the channel, encoded as defined in 8.3.3.2 . This is followed by a sequence of differences between values at consecutive sample points $d_i = c_{i+1} - c_i$ ($1 \leq i \leq N - 1$). Each d_i shall be encoded in two bytes as an unsigned integer after adding 32 768.	3A	M	N	N	Y	N			
R60	8.3.3.3 , 10.3.3.3	The extended data length field shall consist of two bytes.	1	M	Y	N	Y	N			
R61	8.3.3.3 , 10.3.3.3	The extended data length field shall represent the number of bytes in the extended data as an unsigned integer.	2	M	Y	N	Y	N			
R62	8.3.3.4 , 10.3.3.4	The structure of the extended data field is not prescribed by this document.	1	O	Y	N	Y	N			
R63	9.2.1	If present, the comparison algorithm parameters data object tag is $B1_{\text{hex}}$. Its length shall be encoded following the Distinguished Encoding Rules of ASN.1 defined in ISO/IEC 8825-1.	1	M	N	Y	N	N			
R64	9.2.3.1	If present, the sequence of channel descriptions shall begin with a channel inclusion field as defined in 8.3.2.8.1 .	1	M	N	Y	N	N			
R65	9.2.3.2	The channel inclusion field shall be followed by a sequence of channel descriptions for the channels indicated as present in the channel inclusion field. The order of the channel descriptions is determined by the order of indicated inclusion within the channel inclusion field (Table 4) starting with the X channel. The channel descriptions are mandatory for all channels present in the signature/sign time series data block.	1	M	N	Y	N	N			
R66	9.2.3.2	Each channel description shall begin with a preamble as defined in 8.3.2.8.2 .	1	M	N	Y	N	N			
R67	9.2.3.2	If any of the bits 4 through 8 of a channel description preamble are set to 1, the preamble shall be followed by a sequence of channel attributes in the same order as indicated in the preamble starting with the scaling value.	1	M	N	Y	N	N			
R68	9.2.3.3	If present, the meaning and encoding of the scaling values shall be as defined in 8.3.2.8.3 .	2	M	N	Y	N	N			
R69	9.2.3.4	If present, the meaning of the minimum and maximum possible channel values shall be as defined in 8.3.2.8.4 .	2	M	N	Y	N	N			

Table A.1 (continued)

Requirement ID	Subclause reference	Requirement summary	Level	Status	Applicable to format type				IUT support	Supported range	Test result
					Full	Compact	Compression	XML			
R70	9.2.3.4	For the minimum and maximum possible channel values of the Z, T, DT, F, Az, El and R channels, integer values in the range from 0 to 255 are allowed. These values shall be encoded in one byte as unsigned integers.	2	M	N	Y	N	N			
R71	9.2.3.4	For the minimum and maximum possible channel values of the X, Y, VX, VY, AX, AY, TX and TY channels, integer values in the range from -128 to 127 are allowed. These values shall be encoded in one byte as unsigned integers after adding 128 to each value. Hence, for non-negative numbers, bit 8 of the most significant byte has the value 1; for negative numbers, bit 8 of the most significant byte has the value 0. For decoding these values, 128 is to be subtracted from each recorded value.	2	M	N	Y	N	N			
R72	9.2.3.5	If present, the meaning of the average value and of the standard deviation of the channel values shall be as defined in 8.3.2.8.5 .	2	M	N	Y	N	N			
R73	9.2.3.5	For the average values of the Z, T, DT, F, Az, El and R channels as well as for the standard deviations of all channels, integer values in the range from 0 to 255 are allowed. These values shall be encoded in one byte as unsigned integers.	2	M	N	Y	N	N			
R74	9.2.3.5	For the mean values of the X, Y, VX, VY, AX, AY, TX and TY channels, integer values in the range from 128 to 127 are allowed. These values shall be encoded in one byte as unsigned integers after adding 128 to each value. Hence, for non-negative numbers, bit 8 of the most significant byte has the value 1; for negative numbers, bit 8 of the most significant byte has the value 0. For decoding these values, 128 is to be subtracted from each recorded value.	2	M	N	Y	N	N			
R75	9.2.2	If there is an upper limit to the number of sample points, the maximum number of sample points that the comparison algorithm is able to process may be indicated in the comparison algorithm parameters data object. If present, the maximum number of sample points shall be encoded as an unsigned integer.	2	M	N	Y	N	N			
R76	9.4	The body of a signature/sign time series data block consists of a sequence of fields, each of which consists of a sequence of channel values at a particular sample point, for subsequent sample points. For each sample point, the field shall begin with a value for the mandatory X channel, followed by a value for the mandatory Y channel, and a sequence of optional channel values as indicated by the channel inclusion field in the comparison algorithm parameters data object.	1	M	N	Y	N	N			
R77	9.4	For the Z, T, F, Az, El and R channels, integer values in the range from 0 to 255 are allowed. These values shall be encoded in one byte as unsigned integers. In the compact format, the T channel shall contain time data relative to the preceding sample.	2	M	N	Y	N	N			

Table A.1 (continued)

Requirement ID	Subclause reference	Requirement summary	Level	Status	Applicable to format type				IUT support	Supported range	Test result
					Full	Compact	Compression	XML			
R78	9.4	For the X, Y, VX, VY, AX, AY, TX and TY channels, integer values in the range from -128 to 127 are allowed. These values shall be encoded in one byte as unsigned integers after adding 128 to each value. Hence, for non-negative numbers, bit 8 has the value 1, for negative numbers, bit 8 has the value 0. For decoding these values, 128 is to be subtracted from each recorded value.	2	M	N	Y	N	N			
R79	9.4	For the S channel, integer values in the range from 0 to 1 are allowed. These values shall be encoded in one byte as unsigned integers.	2	M	N	Y	N	N			
R80	9.3	The tag of a signature/sign time series data block shall be 5f2e _{Hex} if there is no extended data and 7f2e _{Hex} if there is also extended data.	2	M	N	Y	N	N			
R81	9.3	The length of a signature/sign time series data block shall be encoded following the Distinguished Encoding Rules of ASN.1 defined in ISO/IEC 8825-1.	2	M	N	Y	N	N			
R82	9.3	If there is extended data, the body of a signature/sign time series data block shall be preceded by the tag 81 _{Hex} and a length field.	1	M	N	Y	N	N			
R83	9.3	If there is extended data, it shall follow the body of a signature/sign time series data block and shall be preceded by the tag 82 _{Hex} or A2 _{Hex} and a length field.	1	M	N	Y	N	N			

A.2 Tables of test assertions

A.2.1 Conformance test assertions for binary full format

The specific test assertions required for conformance testing to the full format of this document are listed in [Table A.2](#). The normative requirements of this document listed in [Table A.1](#) are referenced in [Table A.2](#).

The conformance test assertions are listed in the order in which the corresponding fields, if present, are required to appear in a conforming data record.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 19794-7:2021

Table A.2 — Conformance test assertions for the binary full format

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-1	General header	R4	1	Format ID	EQ	53444900 _{Hex}		M			
T-2	General header	R6	1	Version number	EQ	30323100 _{Hex}		M			
T-3	General header	R7	1	Record length	EQ	00000032 _{Hex} to ffffffff _{Hex}		M			
T-4	General header	R7	2	Record length	EQ	Total number of bytes in the record		M			
T-5	General header	R8	1	Number of representations	EQ	0001 _{Hex} to ffff _{Hex}		M			
T-6	General header	R8	2	Number of representations	EQ	Total number of representations		M			
T-7	General header	R9	2	Certification flag	EQ	00 _{Hex}		M			
T-8	Representation header	R11	1	Representation length	EQ	0000001d _{Hex} to ffffffff _{Hex}		M			
T-9	Representation header	R11	2	Representation length	EQ	Total number of bytes in the representation		M			
T-10	Representation header	R12	1	Gregorian calendar year of the capture date	EQ	0001 _{Hex} to ffff _{Hex}		M			
T-11	Representation header	R13	1	Month of the capture date	EQ	01 _{Hex} to 0c _{Hex} or ff _{Hex}		M			
T-12	Representation header	R14	1	Day of the capture date	EQ	01 _{Hex} to 1f _{Hex} or ff _{Hex}		M			
T-13	Representation header	R15	1	Hour of the capture time	EQ	00 _{Hex} to 17 _{Hex} or ff _{Hex}		M			
T-14	Representation header	R16	1	Minute of the capture time	EQ	00 _{Hex} to 3b _{Hex} or ff _{Hex}		M			
T-15	Representation header	R17	1	Second of the capture time	EQ	00 _{Hex} to 3b _{Hex} or ff _{Hex}		M			
T-16	Representation header	R18	1	Millisecond of the capture time	EQ	0000 _{Hex} to 03e7 _{Hex} or ffff _{Hex}		M			
T-17	Representation header	R20	1	Capture device technology ID	EQ	00 _{Hex} to 02 _{Hex} or 04 _{Hex} or 08 _{Hex}		M			
T-18	Representation header	R22	1	Capture device vendor ID	EQ	0000 _{Hex} to ffff _{Hex}		M			
T-19	Representation header	R24	1	Capture device type ID	EQ	0000 _{Hex} to ffff _{Hex}		M			
T-20	Representation header/ quality record	R26	1	Number of quality blocks	EQ	00 _{Hex} to ff _{Hex}		M			
T-21	Representation header/ quality block	R27	1	Quality score	EQ	00 _{Hex} to 64 _{Hex} or ff _{Hex} if present		M			
T-22	Representation header/ quality block	R28	1	Quality algorithm vendor ID	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-23	Representation header/ quality block	R30	1	Quality algorithm ID	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-24	Representation header/ channel inclusion field	R33	1	xIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-25	Representation header/ channel inclusion field	R33	1	yIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-26	Representation header/ channel inclusion field	R33	1	zIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-27	Representation header/ channel inclusion field	R33	1	vXIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			

Table A.2 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-28	Representation header/ channel inclusion field	R33	1	vYIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-29	Representation header/ channel inclusion field	R33	1	aXIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-30	Representation header/ channel inclusion field	R33	1	aYIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-31	Representation header/ channel inclusion field	R33	1	tIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-32	Representation header/ channel inclusion field	R33	1	afIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-33	Representation header/ channel inclusion field	R33	1	fIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-34	Representation header/ channel inclusion field	R33	1	sIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-35	Representation header/ channel inclusion field	R33	1	tXIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-36	Representation header/ channel inclusion field	R33	1	tYIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-37	Representation header/ channel inclusion field	R33	1	azIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-38	Representation header/ channel inclusion field	R33	1	eIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-39	Representation header/ channel inclusion field	R33	1	rIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-40	Representation header/ X channel description	R36	2	xScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-41	Representation header/ X channel description	R36	2	xMinIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-42	Representation header/ X channel description	R36	2	xMaxIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-43	Representation header/ X channel description	R36	2	xMeanIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-44	Representation header/ X channel description	R36	2	xStdIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-45	Representation header/ X channel description	R37	2	xIsConstant	EQ	0 _{Bin} or 1 _{Bin}		M			
T-46	Representation header/ X channel description	R39	2	xLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin}		M			

Table A.2 (continued)

Test	Section	Require- ment ID	Level	Field	Oper- ator	Operands	Note	Status	Sup- port	Supported values	Test result
T-47	Representation header/ X channel descrip- tion	R35	1	reserved	EQ	0 _{Bin}		M			
T-48	Representation header/ X channel descrip- tion	R40	2	xScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-49	Representation header/ X channel descrip- tion	R40	2	xScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-50	Representation header/ X channel descrip- tion	R41	2	xMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-51	Representation header/ X channel descrip- tion	R41	2	xMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-52	Representation header/ X channel descrip- tion	R44	2	xMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-53	Representation header/ X channel descrip- tion	R46	2	xStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-54	Representation header/ Y channel descrip- tion	R36	2	yScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-55	Representation header/ Y channel descrip- tion	R36	2	yMinIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-56	Representation header/ Y channel descrip- tion	R36	2	yMaxIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-57	Representation header/ Y channel descrip- tion	R36	2	yMeanIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-58	Representation header/ Y channel descrip- tion	R36	2	yStdIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-59	Representation header/ Y channel descrip- tion	R37	2	ylsConstant	EQ	0 _{Bin} or 1 _{Bin}		M			
T-60	Representation header/ Y channel descrip- tion	R39	2	yLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin}		M			
T-61	Representation header/ Y channel descrip- tion	R35	1	reserved	EQ	0 _{Bin}		M			
T-62	Representation header/ Y channel descrip- tion	R40	2	yScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-63	Representation header/ Y channel descrip- tion	R40	2	yScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-64	Representation header/ Y channel descrip- tion	R41	2	yMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-65	Representation header/ Y channel descrip- tion	R41	2	yMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			

Table A.2 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-66	Representation header/ Y channel description	R44	2	yMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-67	Representation header/ Y channel description	R46	2	yStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-68	Representation header/ Z channel description	R36	2	zScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-69	Representation header/ Z channel description	R36	2	zMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-70	Representation header/ Z channel description	R36	2	zMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-71	Representation header/ Z channel description	R36	2	zMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-72	Representation header/ Z channel description	R36	2	zStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-73	Representation header/ Z channel description	R37	2	zIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-74	Representation header/ Z channel description	R39	2	zLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-75	Representation header/ Z channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-76	Representation header/ Z channel description	R40	2	zScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-77	Representation header/ Z channel description	R40	2	zScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-78	Representation header/ Z channel description	R41	2	zMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-79	Representation header/ Z channel description	R41	2	zMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-80	Representation header/ Z channel description	R44	2	zMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-81	Representation header/ Z channel description	R46	2	zStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-82	Representation header/ VX channel description	R36	2	vXScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-83	Representation header/ VX channel description	R36	2	vXMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-84	Representation header/ VX channel description	R36	2	vXMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-85	Representation header/ VX channel description	R36	2	vXMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-86	Representation header/ VX channel description	R36	2	vXStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-87	Representation header/ VX channel description	R37	2	vXIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-88	Representation header/ VX channel description	R39	2	vXLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-89	Representation header/ VX channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-90	Representation header/ VX channel description	R40	2	vXScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			

Table A.2 (continued)

Test	Section	Require- ment ID	Level	Field	Oper- ator	Operands	Note	Status	Sup- port	Supported values	Test result
T-91	Representation header/ VX channel descrip- tion	R40	2	vXScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-92	Representation header/ VX channel descrip- tion	R41	2	vXMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-93	Representation header/ VX channel descrip- tion	R41	2	vXMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-94	Representation header/ VX channel descrip- tion	R44	2	vXMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-95	Representation header/ VX channel descrip- tion	R46	2	vXStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-96	Representation header/ VY channel descrip- tion	R36	2	vYScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-97	Representation header/ VY channel descrip- tion	R36	2	vYMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-98	Representation header/ VY channel descrip- tion	R36	2	vYMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-99	Representation header/ VY channel descrip- tion	R36	2	vYMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-100	Representation header/ VY channel descrip- tion	R36	2	vYStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-101	Representation header/ VY channel descrip- tion	R37	2	vYIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-102	Representation header/ VY channel descrip- tion	R39	2	vYLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-103	Representation header/ VY channel descrip- tion	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-104	Representation header/ VY channel descrip- tion	R40	2	vYScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-105	Representation header/ VY channel descrip- tion	R40	2	vYScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-106	Representation header/ VY channel descrip- tion	R41	2	vYMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-107	Representation header/ VY channel descrip- tion	R41	2	vYMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-108	Representation header/ VY channel descrip- tion	R44	2	vYMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-109	Representation header/ VY channel descrip- tion	R46	2	vYStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			

Table A.2 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-110	Representation header/ AX channel description	R36	2	aXScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-111	Representation header/ AX channel description	R36	2	aXMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-112	Representation header/ AX channel description	R36	2	aXMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-113	Representation header/ AX channel description	R36	2	aXMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-114	Representation header/ AX channel description	R36	2	aXStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-115	Representation header/ AX channel description	R37	2	aXIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-116	Representation header/ AX channel description	R39	2	aXLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-117	Representation header/ AX channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-118	Representation header/ AX channel description	R40	2	aXScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-119	Representation header/ AX channel description	R40	2	aXScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-120	Representation header/ AX channel description	R41	2	aXMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-121	Representation header/ AX channel description	R41	2	aXMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-122	Representation header/ AX channel description	R44	2	aXMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-123	Representation header/ AX channel description	R46	2	aXStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-124	Representation header/ AY channel description	R36	2	aYScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-125	Representation header/ AY channel description	R36	2	aYMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-126	Representation header/ AY channel description	R36	2	aYMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-127	Representation header/ AY channel description	R36	2	aYMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-128	Representation header/ AY channel description	R36	2	aYStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			

Table A.2 (continued)

Test	Section	Require- ment ID	Level	Field	Oper- ator	Operands	Note	Status	Sup- port	Supported values	Test result
T-129	Representation header/AY channel descrip- tion	R37	2	aYIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-130	Representation header/AY channel descrip- tion	R39	2	aYLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-131	Representation header/AY channel descrip- tion	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-132	Representation header/AY channel descrip- tion	R40	2	aYScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-133	Representation header/AY channel descrip- tion	R40	2	aYScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-134	Representation header/AY channel descrip- tion	R41	2	aYMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-135	Representation header/AY channel descrip- tion	R41	2	aYMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-136	Representation header/AY channel descrip- tion	R44	2	aYMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-137	Representation header/AY channel descrip- tion	R46	2	aYStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-138	Representation header/T channel descrip- tion	R36	2	tScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-139	Representation header/T channel descrip- tion	R36	2	tMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-140	Representation header/T channel descrip- tion	R36	2	tMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-141	Representation header/T channel descrip- tion	R36	2	tMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-142	Representation header/T channel descrip- tion	R36	2	tStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-143	Representation header/T channel descrip- tion	R37	2	tIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-144	Representation header/T channel descrip- tion	R39	2	tLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-145	Representation header/T channel descrip- tion	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-146	Representation header/T channel descrip- tion	R40	2	tScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-147	Representation header/T channel descrip- tion	R40	2	tScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			

Table A.2 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-148	Representation header/ T channel description	R41	2	tMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-149	Representation header/ T channel description	R41	2	tMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-150	Representation header/ T channel description	R44	2	tMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-151	Representation header/ T channel description	R46	2	tStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-152	Representation header/ DT channel description	R36	2	dTScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-153	Representation header/ DT channel description	R36	2	dTMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-154	Representation header/ DT channel description	R36	2	dTMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-155	Representation header/ DT channel description	R36	2	dTMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-156	Representation header/ DT channel description	R36	2	dTStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-157	Representation header/ DT channel description	R37	2	dTIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-158	Representation header/ DT channel description	R39	2	dTLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-159	Representation header/ DT channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-160	Representation header/ DT channel description	R40	2	dTScalingValueExponent	EQ	00 _{Hex} to 4f _{Hex} if present		M			
T-161	Representation header/ DT channel description	R40	2	dTScalingValueFraction	EQ	000 _{Hex} to 7fff _{Hex} if present		M			
T-162	Representation header/ DT channel description	R41	2	dTMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-163	Representation header/ DT channel description	R41	2	dTMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-164	Representation header/ DT channel description	R44	2	dTMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-165	Representation header/ DT channel description	R46	2	dTStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-166	Representation header/ F channel description	R36	2	fScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-167	Representation header/ F channel description	R36	2	fMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			

Table A.2 (continued)

Test	Section	Require- ment ID	Level	Field	Oper- ator	Operands	Note	Status	Sup- port	Supported values	Test result
T-168	Representation header/ F channel description	R36	2	fMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-169	Representation header/ F channel description	R36	2	fMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-170	Representation header/ F channel description	R36	2	fStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-171	Representation header/ F channel description	R37	2	fIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-172	Representation header/ F channel description	R39	2	fLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-173	Representation header/ F channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-174	Representation header/ F channel description	R40	2	fScalingValueExponent	EQ	0 _{Hex} to 1 _{fHex} if present		M			
T-175	Representation header/ F channel description	R40	2	fScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-176	Representation header/ F channel description	R41	2	fMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-177	Representation header/ F channel description	R41	2	fMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-178	Representation header/ F channel description	R44	2	fMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-179	Representation header/ F channel description	R46	2	fStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-180	Representation header/ S channel description	R36	2	sScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-181	Representation header/ S channel description	R36	2	sMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-182	Representation header/ S channel description	R36	2	sMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-183	Representation header/ S channel description	R36	2	sMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-184	Representation header/ S channel description	R36	2	sStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-185	Representation header/ S channel description	R37	2	slsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-186	Representation header/ S channel description	R39	2	slLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-187	Representation header/ S channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-188	Representation header/ S channel description	R40	2	sScalingValueExponent	EQ	00 _{Hex} to 1 _{fHex} if present		M			
T-189	Representation header/ S channel description	R40	2	sScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-190	Representation header/ S channel description	R41	2	sMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-191	Representation header/ S channel description	R41	2	sMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-192	Representation header/ S channel description	R44	2	sMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-193	Representation header/ S channel description	R46	2	sStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-194	Representation header/ TX channel description	R36	2	txScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-195	Representation header/ TX channel description	R36	2	txMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-196	Representation header/ TX channel description	R36	2	txMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			

Table A.2 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-197	Representation header/ TX channel description	R36	2	tXMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-198	Representation header/ TX channel description	R36	2	tXStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-199	Representation header/ TX channel description	R37	2	tXIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-200	Representation header/ TX channel description	R39	2	tXLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-201	Representation header/ TX channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-202	Representation header/ TX channel description	R40	2	tXScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-203	Representation header/ TX channel description	R40	2	tXScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-204	Representation header/ TX channel description	R41	2	tXMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-205	Representation header/ TX channel description	R41	2	tXMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-206	Representation header/ TX channel description	R44	2	tXMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-207	Representation header/ TX channel description	R46	2	tXStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-208	Representation header/ TY channel description	R36	2	tYScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-209	Representation header/ TY channel description	R36	2	tYMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-210	Representation header/ TY channel description	R36	2	tYMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-211	Representation header/ TY channel description	R36	2	tYMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-212	Representation header/ TY channel description	R36	2	tYStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-213	Representation header/ TY channel description	R37	2	tYIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-214	Representation header/ TY channel description	R39	2	tYLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-215	Representation header/ TY channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			

Table A.2 (continued)

Test	Section	Require- ment ID	Level	Field	Oper- ator	Operands	Note	Status	Sup- port	Supported values	Test result
T-216	Representation header/ TY channel descrip- tion	R40	2	tyScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-217	Representation header/ TY channel descrip- tion	R40	2	tyScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-218	Representation header/ TY channel descrip- tion	R41	2	tyMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-219	Representation header/ TY channel descrip- tion	R41	2	tyMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-220	Representation header/ TY channel descrip- tion	R44	2	tyMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-221	Representation header/ TY channel descrip- tion	R46	2	tyStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-222	Representation header/ A channel descrip- tion	R36	2	azScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-223	Representation header/ A channel descrip- tion	R36	2	azMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-224	Representation header/ A channel descrip- tion	R36	2	azMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-225	Representation header/ A channel descrip- tion	R36	2	azMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-226	Representation header/ A channel descrip- tion	R36	2	azStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-227	Representation header/ A channel descrip- tion	R37	2	azIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-228	Representation header/ A channel descrip- tion	R39	2	azLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-229	Representation header/ A channel descrip- tion	R35	1	reserved	EQ	if present		M			
T-230	Representation header/ A channel descrip- tion	R40	2	azScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-231	Representation header/ A channel descrip- tion	R40	2	azScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-232	Representation header/ A channel descrip- tion	R41	2	azMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-233	Representation header/ A channel descrip- tion	R41	2	azMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-234	Representation header/ A channel descrip- tion	R44	2	azMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			

Table A.2 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-235	Representation header/ A channel description	R46	2	azStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-236	Representation header/ E channel description	R36	2	elScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-237	Representation header/ E channel description	R36	2	elMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-238	Representation header/ E channel description	R36	2	elMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-239	Representation header/ E channel description	R36	2	elMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-240	Representation header/ E channel description	R36	2	elStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-241	Representation header/ E channel description	R37	2	elIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-242	Representation header/ E channel description	R39	2	elLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-243	Representation header/ E channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-244	Representation header/ E channel description	R40	2	elScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-245	Representation header/ E channel description	R40	2	elScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-246	Representation header/ E channel description	R41	2	elMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-247	Representation header/ E channel description	R41	2	elMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-248	Representation header/ E channel description	R44	2	elMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-249	Representation header/ E channel description	R46	2	elStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-250	Representation header/ R channel description	R36	2	rScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-251	Representation header/ R channel description	R36	2	rMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-252	Representation header/ R channel description	R36	2	rMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-253	Representation header/ R channel description	R36	2	rMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			

Table A.2 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-254	Representation header/ R channel description	R36	2	rStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-255	Representation header/ R channel description	R37	2	rIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-256	Representation header/ R channel description	R39	2	rLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-257	Representation header/ R channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-258	Representation header/ R channel description	R40	2	rScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-259	Representation header/ R channel description	R40	2	rScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-260	Representation header/ R channel description	R41	2	rMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-261	Representation header/ R channel description	R41	2	rMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-262	Representation header/ R channel description	R44	2	rMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-263	Representation header/ R channel description	R46	2	rStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-264	Representation header	R48	1	Number of sample points	EQ	000000 _{Hex} to ffffff _{Hex}		M			
T-265	Representation header	R49	2	Number of sample points	EQ	Total number of sample points		M			
T-266	Representation body	R53, R55	2	x	EQ	0000 _{Hex} to ffff _{Hex}		M			
T-267	Representation body	R53, R55	2	y	EQ	0000 _{Hex} to ffff _{Hex}		M			
T-268	Representation body	R53, R54	2	z	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-269	Representation body	R53, R55	2	vX	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-270	Representation body	R53, R55	2	vY	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-271	Representation body	R53, R55	2	aX	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-272	Representation body	R53, R55	2	aY	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-273	Representation body	R53, R54	2	t	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-274	Representation body	R53, R54	2	dt	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-275	Representation body	R53, R54	2	f	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-276	Representation body	R53, R56	2	s	EQ	00 _{Hex} or 01 _{Hex} if present		M			
T-277	Representation body	R53, R55	2	tX	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-278	Representation body	R53, R55	2	tY	EQ	0000 _{Hex} to ffff _{Hex} if present		M			

Table A.2 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-279	Representation body	R53, R54	2	az	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-280	Representation body	R53, R54	2	el	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-281	Representation body	R53, R54	2	r	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-282	Representation body	R1, R2, R3, R57	3B	x, y, s	N/A	N/A	1	M		N/A	
T-283	Representation body	R1, R2, R3, R57	3B	x, y, s	N/A	N/A	2	M		N/A	
T-284	Representation body	R60	1	Extended-data length	EQ	0000 _{Hex} to ffff _{Hex}		M			
T-285	Representation body	R61	2	Extended-data length	EQ	Total number of bytes in {Extended data}		M			
T-286	Representation body	R62	1	Extended data	EQ	any value if present		O			

Test notes

1 Enter strokes of defined direction and length to a signature/sign time series data capture subsystem and check whether the direction and length of the strokes are correctly reflected in the output signature/sign time series data records.

Test stimulus: A 2 cm horizontal line followed by a 2 cm vertical line drawn on the capture surface will enable an assessment of the accuracy of the X, Y and S channels (with reference to the scaling values).

Expected outcome: No Y channel deviation should be detected in the horizontal line drawing data and no X channel deviation should be detected in the vertical line drawing data. A single 'pen-up' change (S channel: 1 → 0) followed by a single 'pen-down' change (S channel: 0 → 1) between the drawing data.

2 Enter strokes of defined direction and length to a signature/sign time series data capture subsystem and check whether the direction and length of the strokes are correctly reflected in the output signature/sign time series data records.

Test stimulus: A circle of 2 cm in diameter drawn using a template overlaid on the capture surface will enable an assessment of the accuracy of the X and Y channels (with reference to the scaling values).

Expected outcome: Both X and Y channel data should constantly change as the pen moves during the drawing process.

A.2.2 Conformance test assertions for binary compact format

The specific test assertions required for conformance testing to the compact format of this document are listed in [Table A.3](#). The normative requirements of this document listed in [Table A.1](#) are referenced in [Table A.3](#).

The conformance test assertions are listed in the order in which the corresponding fields, if present, are required to appear in a conforming data record.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 19794-7:2021

Table A.3 — Conformance test assertions for the binary compact format

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-287	CBEFF wrapper	R80	1	BDB tag	EQ	5f2e _{Hex} or 7f2e _{Hex}	1	M			
T-288	CBEFF wrapper	R81	1	BDB length	EQ	00 _{Hex} to 7f _{Hex} , 8180 _{Hex} to 81ff _{Hex} , 820100 _{Hex} to 82ffff _{Hex}	2	M			
T-289	CBEFF wrapper	R81	2	{BDB length}	EQ	number of contents bytes		M			
T-290	CBEFF wrapper	R82	1	Standard BDB tag	EQ	81 _{Hex}		O-1			
T-291	CBEFF wrapper	R82	1	Standard BDB length	EQ	00 _{Hex} to 7f _{Hex} , 8180 _{Hex} to 81ff _{Hex} , 820100 _{Hex} to 82ffff _{Hex}	2	O-1			
T-292	CBEFF wrapper	R82	2	{Standard BDB length}	EQ	number of contents bytes		O-1			
T-293	BDB	R76, R78	2	x	EQ	00 _{Hex} to ff _{Hex}		M			
T-294	BDB	R76, R78	2	y	EQ	00 _{Hex} to ff _{Hex}		M			
T-295	BDB	R76, R77	2	z	EQ	00 _{Hex} to ff _{Hex} if present		M			
T-296	BDB	R76, R78	2	vX	EQ	00 _{Hex} to ff _{Hex} if present		M			
T-297	BDB	R76, R78	2	vY	EQ	00 _{Hex} to ff _{Hex} if present		M			
T-298	BDB	R76, R78	2	aX	EQ	00 _{Hex} to ff _{Hex} if present		M			
T-299	BDB	R76, R78	2	aY	EQ	00 _{Hex} to ff _{Hex} if present		M			
T-300	BDB	R76, R77	2	t	EQ	00 _{Hex} to ff _{Hex} if present		M			
T-301	BDB	R76, R77	2	dt	EQ	00 _{Hex} to ff _{Hex} if present		M			
T-302	BDB	R76, R77	2	f	EQ	00 _{Hex} to ff _{Hex} if present		M			
T-303	BDB	R76, R79	2	s	EQ	00 _{Hex} or 01 _{Hex} if present		M			
T-304	BDB	R76, R78	2	tX	EQ	00 _{Hex} to ff _{Hex} if present		M			
T-305	BDB	R76, R78	2	tY	EQ	00 _{Hex} to ff _{Hex} if present		M			
T-306	BDB	R76, R77	2	az	EQ	00 _{Hex} to ff _{Hex} if present		M			
T-307	BDB	R76, R77	2	el	EQ	00 _{Hex} to ff _{Hex} if present		M			
T-308	BDB	R76, R77	2	r	EQ	00 _{Hex} to ff _{Hex} if present		M			
T-309	BDB	R1, R2, R3, R57	3B	x, y, s	N/A	N/A	3	M		N/A	
T-310	BDB	R1, R2, R3, R57	3B	x, y, s	N/A	N/A	4	M		N/A	
T-311	CBEFF wrapper	R83	1	Extended BDB tag	EQ	82 _{Hex} or A2 _{Hex}		O-1			
T-312	CBEFF wrapper	R83	1	Extended BDB length	EQ	00 _{Hex} to 7f _{Hex} , 8180 _{Hex} to 81ff _{Hex} , 820100 _{Hex} to 82ffff _{Hex}	2	O-1			
T-313	CBEFF wrapper	R83	2	{Extended BDB length}	EQ	number of contents bytes		O-1			
T-314	Extended data	R83	2	Extended data	EQ	any value		O-1			

Table A.3 (continued)

Test notes

- 1The tag shall be 5f2e_{Hex} if there is no extended data and 7f2e_{Hex} if there is also extended data.
- 2The length shall be encoded following the Distinguished Encoding Rules of ASN.1 defined in ISO/IEC 8825-1.
- 3Enter strokes of defined direction and length to a signature/sign time series data capture subsystem and check whether the direction and length of the strokes are correctly reflected in the output signature/sign time series data records.
- Test stimulus: A 2 cm horizontal line followed by a 2 cm vertical line drawn on the capture surface will enable an assessment of the accuracy of the X, Y and S channels (with reference to the scaling values).
- Expected outcome: No Y channel deviation should be detected in the horizontal line drawing data and no X channel deviation should be detected in the vertical line drawing data. A single 'pen-up' change (S channel: 1 → 0) followed by a single 'pen-down' change (S channel: 0 → 1) between line drawing data.
- 4Enter strokes of defined direction and length to a signature/sign time series data capture subsystem and check whether the direction and length of the strokes are correctly reflected in the output signature/sign time series data records.
- Test stimulus: A circle of 2 cm in diameter drawn using a template overlaid on capture surface will enable an assessment of the accuracy of the X and Y channels (with reference to the scaling values).
- Expected outcome: Both X and Y channel data should constantly change as the pen moves during the drawing process.

Status notes

- 0-1These tests apply only if there is extended data.

A.2.3 Conformance test assertions for binary compression format

The specific test assertions required for conformance testing to the compression format of this document are listed in [Table A.4](#). The normative requirements of this document listed in [Table A.1](#) are referenced in [Table A.4](#).

The conformance test assertions are listed in the order in which the corresponding fields, if present, are required to appear in a conforming data record.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 19794-7:2021

Table A.4 — Conformance test assertions for the binary compression format

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-315	General header	R5	1	Format ID	EQ	53434400 _{Hex}		M			
T-316	General header	R6	1	Version number	EQ	30323100 _{Hex}		M			
T-1	General header	R7	2	Record length	EQ	00000032 _{Hex} to ffffffff _{Hex}		M			
T-318	General header	R7	2	Record length	EQ	Total number of bytes in the record		M			
T-319	General header	R8	2	Number of representations	EQ	0001 _{Hex} to ffff _{Hex}		M			
T-320	General header	R8	2	Number of representations	EQ	Total number of representations		M			
T-321	General header	R9	2	Certification flag	EQ	00 _{Hex}		M			
T-322	Representation header	R11	2	Representation length	EQ	0000001d _{Hex} to ffffffff _{Hex}		M			
T-323	Representation header	R11	2	Representation length	EQ	Total number of bytes in the representation		M			
T-324	Representation header	R12	1	Gregorian calendar year of the capture date	EQ	0001 _{Hex} to ffff _{Hex}		M			
T-325	Representation header	R13	1	Month of the capture date	EQ	01 _{Hex} to 0c _{Hex} or ff _{Hex}		M			
T-326	Representation header	R14	1	Day of the capture date	EQ	01 _{Hex} to 1f _{Hex} or ff _{Hex}		M			
T-327	Representation header	R15	1	Hour of the capture time	EQ	00 _{Hex} to 17 _{Hex} or ff _{Hex}		M			
T-328	Representation header	R16	1	Minute of the capture time	EQ	00 _{Hex} to 3b _{Hex} or ff _{Hex}		M			
T-329	Representation header	R17	1	Second of the capture time	EQ	00 _{Hex} to 3b _{Hex} or ff _{Hex}		M			
T-330	Representation header	R18	1	Millisecond of the capture time	EQ	0000 _{Hex} to 03e7 _{Hex} or ffff _{Hex}		M			
T-331	Representation header	R20	1	Capture device technology ID	EQ	00 _{Hex} to 02 _{Hex} or 04 _{Hex} or 08 _{Hex}		M			
T-332	Representation header	R22	1	Capture device vendor ID	EQ	0000 _{Hex} to ffff _{Hex}		M			
T-333	Representation header	R24	1	Capture device type ID	EQ	0000 _{Hex} to ffff _{Hex}		M			
T-334	Representation header/quality record	R26	2	Number of quality blocks	EQ	00 _{Hex} to ff _{Hex}		M			
T-335	Representation header/quality block	R27	1	Quality score	EQ	00 _{Hex} to 64 _{Hex} or ff _{Hex} if present		M			
T-336	Representation header/quality block	R28	1	Quality algorithm vendor ID	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-337	Representation header/quality block	R30	1	Quality algorithm ID	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-338	Representation header/channel inclusion field	R33	1	xIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-339	Representation header/channel inclusion field	R33	1	yIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			

Table A.4 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-340	Representation header/ channel inclusion field	R33	1	zIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-341	Representation header/ channel inclusion field	R33	1	vXIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-342	Representation header/ channel inclusion field	R33	1	vYIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-343	Representation header/ channel inclusion field	R33	1	aXIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-344	Representation header/ channel inclusion field	R33	1	aYIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-345	Representation header/ channel inclusion field	R33	1	tIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-346	Representation header/ channel inclusion field	R33	1	dtIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-347	Representation header/ channel inclusion field	R33	1	fIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-348	Representation header/ channel inclusion field	R33	1	sIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-349	Representation header/ channel inclusion field	R33	1	tXIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-350	Representation header/ channel inclusion field	R33	1	tYIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-351	Representation header/ channel inclusion field	R33	1	azIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-352	Representation header/ channel inclusion field	R33	1	elIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-353	Representation header/ channel inclusion field	R33	1	rIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-354	Representation header/ X channel description	R36	2	xScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-355	Representation header/ X channel description	R36	2	xMinIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-356	Representation header/ X channel description	R36	2	xMaxIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-357	Representation header/ X channel description	R36	2	xMeanIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-358	Representation header/ X channel description	R36	2	xStdIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			

Table A.4 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-359	Representation header/ X channel description	R37	2	xIsConstant	EQ	0 _{Bin} or 1 _{Bin}		M			
T-360	Representation header/ X channel description	R39	2	xLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin}		M			
T-361	Representation header/ X channel description	R35	1	reserved	EQ	0 _{Bin}		M			
T-362	Representation header/ X channel description	R40	2	xScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-363	Representation header/ X channel description	R40	2	xScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-364	Representation header/ X channel description	R41	2	xMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-365	Representation header/ X channel description	R41	2	xMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-366	Representation header/ X channel description	R44	2	xMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-367	Representation header/ X channel description	R46	2	xStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-368	Representation header/ Y channel description	R36	2	yScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-369	Representation header/ Y channel description	R36	2	yMinIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-370	Representation header/ Y channel description	R36	2	yMaxIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-371	Representation header/ Y channel description	R36	2	yMeanIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-372	Representation header/ Y channel description	R36	2	yStdIncluded	EQ	0 _{Bin} or 1 _{Bin}		M			
T-373	Representation header/ Y channel description	R37	2	yIsConstant	EQ	0 _{Bin} or 1 _{Bin}		M			
T-374	Representation header/ Y channel description	R39	2	yLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin}		M			
T-375	Representation header/ Y channel description	R35	1	reserved	EQ	0 _{Bin}		M			
T-376	Representation header/ Y channel description	R40	2	yScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-377	Representation header/ Y channel description	R40	2	yScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			

Table A.4 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-378	Representation header/ Y channel description	R41	2	yMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-379	Representation header/ Y channel description	R41	2	yMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-380	Representation header/ Y channel description	R44	2	yMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-381	Representation header/ Y channel description	R46	2	yStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-382	Representation header/ Z channel description	R36	2	zScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-383	Representation header/ Z channel description	R36	2	zMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-384	Representation header/ Z channel description	R36	2	zMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-385	Representation header/ Z channel description	R36	2	zMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-386	Representation header/ Z channel description	R36	2	zStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-387	Representation header/ Z channel description	R37	2	zIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-388	Representation header/ Z channel description	R39	2	zLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-389	Representation header/ Z channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-390	Representation header/ Z channel description	R40	2	zScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-391	Representation header/ Z channel description	R40	2	zScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-392	Representation header/ Z channel description	R41	2	zMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-393	Representation header/ Z channel description	R41	2	zMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-394	Representation header/ Z channel description	R44	2	zMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-395	Representation header/ Z channel description	R46	2	zStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-396	Representation header/ VX channel description	R36	2	vXScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			

Table A.4 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-397	Representation header/ VX channel description	R36	2	vXMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-398	Representation header/ VX channel description	R36	2	vXMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-399	Representation header/ VX channel description	R36	2	vXMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-400	Representation header/ VX channel description	R36	2	vXStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-401	Representation header/ VX channel description	R37	2	vXIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-402	Representation header/ VX channel description	R39	2	vXLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-403	Representation header/ VX channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-404	Representation header/ VX channel description	R40	2	vXScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-405	Representation header/ VX channel description	R40	2	vXScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-406	Representation header/ VX channel description	R41	2	vXMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-407	Representation header/ VX channel description	R41	2	vXMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-408	Representation header/ VX channel description	R44	2	vXMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-409	Representation header/ VX channel description	R46	2	vXStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-410	Representation header/ VY channel description	R36	2	vYScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-411	Representation header/ VY channel description	R36	2	vYMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-412	Representation header/ VY channel description	R36	2	vYMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-413	Representation header/ VY channel description	R36	2	vYMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-414	Representation header/ VY channel description	R36	2	vYStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-415	Representation header/ VY channel description	R37	2	vYIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			

Table A.4 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-416	Representation header/ VY channel description	R39	2	vYLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-417	Representation header/ VY channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-418	Representation header/ VY channel description	R40	2	vYScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-419	Representation header/ VY channel description	R40	2	vYScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-420	Representation header/ VY channel description	R41	2	vYMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-421	Representation header/ VY channel description	R41	2	vYMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-422	Representation header/ VY channel description	R44	2	vYMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-423	Representation header/ VY channel description	R46	2	vYStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-424	Representation header/ AX channel description	R36	2	aXScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-425	Representation header/ AX channel description	R36	2	aXMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-426	Representation header/ AX channel description	R36	2	aXMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-427	Representation header/ AX channel description	R36	2	aXMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-428	Representation header/ AX channel description	R36	2	aXStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-429	Representation header/ AX channel description	R37	2	aXIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-430	Representation header/ AX channel description	R39	2	aXLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-431	Representation header/ AX channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-432	Representation header/ AX channel description	R40	2	aXScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-433	Representation header/ AX channel description	R40	2	aXScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-434	Representation header/ AX channel description	R41	2	aXMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			

Table A.4 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-435	Representation header/ AX channel description	R41	2	aXMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-436	Representation header/ AX channel description	R44	2	aXMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-437	Representation header/ AX channel description	R46	2	aXStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-438	Representation header/ AY channel description	R36	2	aYScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-439	Representation header/ AY channel description	R36	2	aYMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-440	Representation header/ AY channel description	R36	2	aYMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-441	Representation header/ AY channel description	R36	2	aYMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-442	Representation header/ AY channel description	R36	2	aYStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-443	Representation header/ AY channel description	R37	2	aYIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-444	Representation header/ AY channel description	R39	2	aYLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-445	Representation header/ AY channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-446	Representation header/ AY channel description	R40	2	aYScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-447	Representation header/ AY channel description	R40	2	aYScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-448	Representation header/ AY channel description	R41	2	aYMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-449	Representation header/ AY channel description	R41	2	aYMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-450	Representation header/ AY channel description	R44	2	aYMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-451	Representation header/ AY channel description	R46	2	aYStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-452	Representation header/ T channel description	R36	2	tScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-453	Representation header/ T channel description	R36	2	tMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			

Table A.4 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-454	Representation header/ T channel description	R36	2	tMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-455	Representation header/ T channel description	R36	2	tMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-456	Representation header/ T channel description	R36	2	tStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-457	Representation header/ T channel description	R37	2	tTsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-458	Representation header/ T channel description	R39	2	tLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-459	Representation header/ T channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-460	Representation header/ T channel description	R40	2	tScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-461	Representation header/ T channel description	R40	2	tScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-462	Representation header/ T channel description	R41	2	tMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-463	Representation header/ T channel description	R41	2	tMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-464	Representation header/ T channel description	R44	2	tMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-465	Representation header/ T channel description	R46	2	tStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-466	Representation header/ DT channel description	R36	2	dTScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-467	Representation header/ DT channel description	R36	2	dTMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-468	Representation header/ DT channel description	R36	2	dTMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-469	Representation header/ DT channel description	R36	2	dTMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-470	Representation header/ DT channel description	R36	2	dTStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-471	Representation header/ DT channel description	R37	2	dTTsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-472	Representation header/ DT channel description	R39	2	dTLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			

Table A.4 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-473	Representation header/ DT channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-474	Representation header/ DT channel description	R40	2	dTSalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-475	Representation header/ DT channel description	R40	2	dTSalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-476	Representation header/ DT channel description	R41	2	dTMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-477	Representation header/ DT channel description	R41	2	dTMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-478	Representation header/ DT channel description	R44	2	dTMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-479	Representation header/ DT channel description	R46	2	dTStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-480	Representation header/ F channel description	R36	2	fScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-481	Representation header/ F channel description	R36	2	fMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-482	Representation header/ F channel description	R36	2	fMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-483	Representation header/ F channel description	R36	2	fMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-484	Representation header/ F channel description	R36	2	fStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-485	Representation header/ F channel description	R37	2	fIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-486	Representation header/ F channel description	R39	2	fLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-487	Representation header/ F channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-488	Representation header/ F channel description	R40	2	fScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-489	Representation header/ F channel description	R40	2	fScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-490	Representation header/ F channel description	R41	2	fMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-491	Representation header/ F channel description	R41	2	fMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			

Table A.4 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-492	Representation header/ F channel description	R44	2	fMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-493	Representation header/ F channel description	R46	2	fStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-494	Representation header/ S channel description	R36	2	sScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-495	Representation header/ S channel description	R36	2	sMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-496	Representation header/ S channel description	R36	2	sMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-497	Representation header/ S channel description	R36	2	sMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-498	Representation header/ S channel description	R36	2	sStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-499	Representation header/ S channel description	R37	2	sIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-500	Representation header/ S channel description	R39	2	sLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-501	Representation header/ S channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-502	Representation header/ S channel description	R40	2	sScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-503	Representation header/ S channel description	R40	2	sScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-504	Representation header/ S channel description	R41	2	sMin	EQ	0000 _{Hex} to fff _{Hex} if present		M			
T-505	Representation header/ S channel description	R41	2	sMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-506	Representation header/ S channel description	R44	2	sMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-507	Representation header/ S channel description	R46	2	sStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-508	Representation header/ TX channel description	R36	2	tXScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-509	Representation header/ TX channel description	R36	2	tXMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-510	Representation header/ TX channel description	R36	2	tXMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			

Table A.4 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-511	Representation header/ TX channel description	R36	2	tXMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-512	Representation header/ TX channel description	R36	2	tXStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-513	Representation header/ TX channel description	R37	2	tXIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-514	Representation header/ TX channel description	R39	2	tXLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-515	Representation header/ TX channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-516	Representation header/ TX channel description	R40	2	tXScalingValueExponent	EQ	00 _{Hex} to 7ff _{Hex} if present		M			
T-517	Representation header/ TX channel description	R40	2	tXScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-518	Representation header/ TX channel description	R41	2	tXMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-519	Representation header/ TX channel description	R41	2	tXMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-520	Representation header/ TX channel description	R44	2	tXMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-521	Representation header/ TX channel description	R46	2	tXStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-522	Representation header/ TY channel description	R36	2	tYScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-523	Representation header/ TY channel description	R36	2	tYMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-524	Representation header/ TY channel description	R36	2	tYMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-525	Representation header/ TY channel description	R36	2	tYMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-526	Representation header/ TY channel description	R36	2	tYStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-527	Representation header/ TY channel description	R37	2	tYIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-528	Representation header/ TY channel description	R39	2	tYLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-529	Representation header/ TY channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			

Table A.4 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-530	Representation header/ TY channel description	R40	2	tYScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-531	Representation header/ TY channel description	R40	2	tYScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-532	Representation header/ TY channel description	R41	2	tYMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-533	Representation header/ TY channel description	R41	2	tYMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-534	Representation header/ TY channel description	R44	2	tYMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-535	Representation header/ TY channel description	R46	2	tYStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-536	Representation header/ A channel description	R36	2	azScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-537	Representation header/ A channel description	R36	2	azMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-538	Representation header/ A channel description	R36	2	azMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-539	Representation header/ A channel description	R36	2	azMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-540	Representation header/ A channel description	R36	2	azStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-541	Representation header/ A channel description	R37	2	azIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-542	Representation header/ A channel description	R39	2	azLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-543	Representation header/ A channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-544	Representation header/ A channel description	R40	2	azScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-545	Representation header/ A channel description	R40	2	azScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-546	Representation header/ A channel description	R41	2	azMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-547	Representation header/ A channel description	R41	2	azMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-548	Representation header/ A channel description	R44	2	azMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			

Table A.4 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-549	Representation header/ A channel description	R46	2	azStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-550	Representation header/ E channel description	R36	2	elScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-551	Representation header/ E channel description	R36	2	elMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-552	Representation header/ E channel description	R36	2	elMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-553	Representation header/ E channel description	R36	2	elMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-554	Representation header/ E channel description	R36	2	elStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-555	Representation header/ E channel description	R37	2	elConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-556	Representation header/ E channel description	R39	2	elLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-557	Representation header/ E channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-558	Representation header/ E channel description	R40	2	elScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-559	Representation header/ E channel description	R40	2	elScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-560	Representation header/ E channel description	R41	2	elMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-561	Representation header/ E channel description	R41	2	elMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-562	Representation header/ E channel description	R44	2	elMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-563	Representation header/ E channel description	R46	2	elStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-564	Representation header/ R channel description	R36	2	rScalingValueIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-565	Representation header/ R channel description	R36	2	rMinIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-566	Representation header/ R channel description	R36	2	rMaxIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-567	Representation header/ R channel description	R36	2	rMeanIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			

Table A.4 (continued)

Test	Section	Requirement ID	Level	Field	Operator	Operands	Note	Status	Support	Supported values	Test result
T-568	Representation header/ R channel description	R36	2	rStdIncluded	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-569	Representation header/ R channel description	R37	2	rIsConstant	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-570	Representation header/ R channel description	R39	2	rLinearCompRemoved	EQ	0 _{Bin} or 1 _{Bin} if present		M			
T-571	Representation header/ R channel description	R35	1	reserved	EQ	0 _{Bin} if present		M			
T-572	Representation header/ R channel description	R40	2	rScalingValueExponent	EQ	00 _{Hex} to 1f _{Hex} if present		M			
T-573	Representation header/ R channel description	R40	2	rScalingValueFraction	EQ	000 _{Hex} to 7ff _{Hex} if present		M			
T-574	Representation header/ R channel description	R41	2	rMin	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-575	Representation header/ R channel description	R41	2	rMax	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-576	Representation header/ R channel description	R44	2	rMean	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-577	Representation header/ R channel description	R46	2	rStd	EQ	0000 _{Hex} to ffff _{Hex} if present		M			
T-578	Representation header	R48	1	Number of sample points	EQ	000000 _{Hex} to ffffff _{Hex}		M			
T-579	Representation header	R49	2	Number of sample points	EQ	Total number of sample points		M			
T-580	Representation header	R50	1	Compression algorithm ID	EQ	00 _{Hex} to 08 _{Hex}					
T-581	Representation header	R51	1	Compressed-data length	EQ	000000 _{Hex} to ffffff _{Hex}		M			
T-582	Representation header	R52	2	Compressed-data length	EQ	Total number of bytes of compressed data		M			
T-583	Representation body	R58, R59	2	Compressed data	C	N/A	1	M			
T-584	Representation body	R1, R2, R3, R57	3B	x, y, s	N/A	N/A	2	M		N/A	
T-585	Representation body	R1, R2, R3, R57	3B	x, y, s	N/A	N/A	3	M		N/A	
T-586	Representation body	R60	1	Extended-data length	EQ	0000 _{Hex} to ffff _{Hex}		M			
T-587	Representation body	R61	2	Extended-data length	EQ	Total number of bytes in {Extended data}		M			
T-588	Representation body	R62	1	Extended data	EQ	any value if present		M			

Test Notes

- 1 Uncompress the compressed data using the algorithm indicated by the compression algorithm ID in the representation header. The uncompressed data shall consist of a sequence of difference channels, one for each channel that is indicated as present by the channel inclusion field. Every difference channel shall start with the initial value of the channel. This is followed by a sequence of differences between values at consecutive sample points.