

REV.  
A

SAE AS4860

FEDERAL SUPPLY CLASS  
4730

# RATIONALE

AS4860A HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

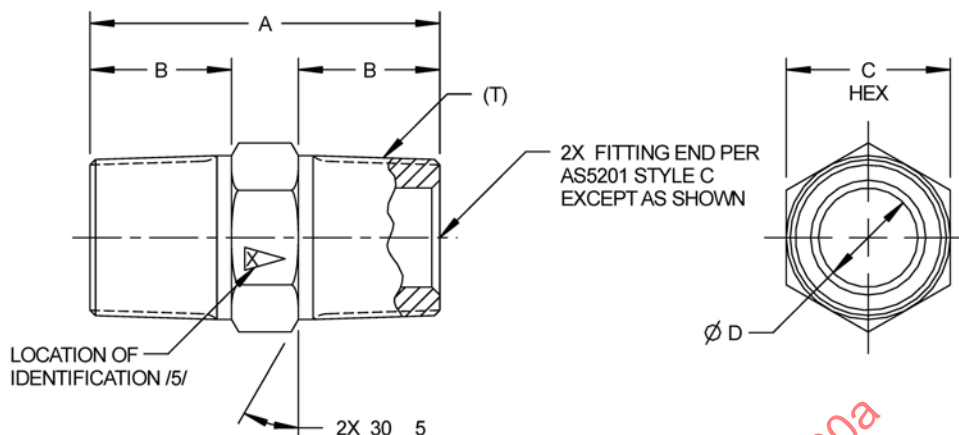


FIGURE 1 – FITTING, NIPPLE, PIPE, EXTERNAL THREAD


TABLE 1 – DIMENSIONS AND WEIGHTS

BASIC NO. AS4860 /14/ SIZE CODE	T THREAD PER AS71051 ANPT	A ±.031	B	C	D	LB/EA APPROX REF ALUMINUM	LB/EA APPROX REF COPPER	LB/EA APPROX REF CRES
01	1/8-27	.969	.391	.428-.440	.199-.206	.009	.027	.025
02	1/4-18	1.438	.594	.615-.628	.275-.283	.024	.072	.068
03	3/8-18	1.469	.594	.740-.753	.411-.424	.031	.093	.088
04	1/2-14	1.844	.766	.928-.941	.498-.518	.061	.186	.176
06	3/4-14	1.906	.781	1.113-1.128	.717-.736	.082	.249	.235
08	1-11 1/2	2.313	.969	1.363-1.380	.904-.924	.146	.444	.419
10	1 1/4-11 1/2	2.344	.984	1.738-1.755	1.248-1.264	.199	.606	.572

## INACTIVE IN PART - SEE NOTE /15/

SAE values your input. To provide feedback  
on this Technical Report, please visit  
<http://www.sae.org/technical/standards/AS4860A>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3B

PROCUREMENT SPECIFICATION: /5/ AS4842

**SAE Aerospace**  
An SAE International Group

### AEROSPACE STANDARD

FITTING, NIPPLE, PIPE,  
EXTERNAL THREAD

**SAE AS4860**  
SHEET 1 OF 3

REV.  
A

NOTES:

/1/ MATERIAL:

- a. DASH AS CODE LETTER – TYPE 377 COPPER ALLOY FORGING PER ASTM B 124, OR HALF HARD FORGING OR BAR PER ASTM B 138, OR BAR PER AMS 4614.
- b. CODE LETTER D – TYPE 2014-T6 ALUMINUM ALLOY FORGING PER AMS-QQ-A-367 OR AMS 4133, OR TYPE 2024-T6 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6, OR TYPE 2024-T851 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6 OR AMS 4339. /15/
- c. CODE LETTER J – TYPE 304 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS-QQ-S-763 OR AMS 5639.
- d. CODE LETTER K – TYPE 316 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS-QQ-S-763 OR AMS 5648.
- e. CODE LETTER R – TYPE 321 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS-QQ-S-763 OR AMS 5645.
- f. CODE LETTER S – TYPE 347 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS-QQ-S-763 OR AMS 5646. /15/
- g. CODE LETTER W – TYPE 7075-T73 ALUMINUM ALLOY FORGING PER AMS-QQ-A-367 OR AMS 4141, OR TYPE 7075-T73 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/9, OR TYPE 7075-T7351 ALUMINUM ALLOY BAR PER AMS 4124.

2. FINISH:

- a. DASH AS CODE LETTER – CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 3 OR NONE. /16/
- b. MATERIAL CODE LETTER D – ANODIZE PER MIL-A-8625, TYPE II, CLASS 2 OR AMS 2472, DYE BLUE.
- c. MATERIAL CODE LETTER J – PASSIVATE PER AMS-QQ-P-35, TYPE VI OR VII.
- d. MATERIAL CODE LETTER K – PASSIVATE PER AMS-QQ-P-35, TYPE VI OR VII.
- e. MATERIAL CODE LETTER R – PASSIVATE PER AMS-QQ-P-35, TYPE VI OR VII.
- f. MATERIAL CODE LETTER S – PASSIVATE PER AMS-QQ-P-35, TYPE VI OR VII.
- g. MATERIAL CODE LETTER W – ANODIZE PER MIL-A-8625, TYPE II, CLASS 2 OR AMS 2472, DYE BROWN SIMILAR TO COLOR 10080 OF FED-STD-595.

/3/ INTENDED USE: OXYGEN SYSTEMS AND GROUND SUPPORT EQUIPMENT ONLY. PARTS FOR OXYGEN SYSTEMS SHALL BE IDENTIFIED IN THE PART NUMBER AS CODE "A" AND SHALL BE FURNISHED CLEANED, PACKAGED, AND LABELED IN ACCORDANCE WITH AIR 1176 TO A PROCESS APPROVED BY THE USER.

/4/ PROCUREMENT SPECIFICATION: AS4842 EXCEPT AS SPECIFIED ON THIS STANDARD. USERS OF THIS STANDARD SHALL PROCURE THIS PRODUCT FROM ACCREDITED MANUFACTURER(S), OR ACCREDITED DISTRIBUTOR(S), AS LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED MANUFACTURERS LIST (QML) FOR THIS TYPE OF PRODUCT.

/5/ IDENTIFICATION AT LOCATION SHOWN: MARK PER AS478 CLASS C OR D, OR METHOD 7A3, 15A3, OR 15B.

- a. FOR SIZES 03 AND SMALLER: MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, LETTERS "AS", MATERIAL CODE LETTER, AND FORGING MANUFACTURER'S IDENTIFICATION, WHEN MADE FROM FORGING.
- b. FOR SIZES 04 AND LARGER: MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, BASIC PART NUMBER, MATERIAL CODE LETTER, AND FORGING MANUFACTURER'S IDENTIFICATION, WHEN MADE FROM FORGING.

6. INVENTORIED PARTS CONFORMING TO THE PREVIOUS "LETTER CHANGE" MAY BE USED TO DEPLETION.

7. THIS STANDARD IS A FUNCTIONAL EQUIVALENT OF AN911.

8. THE CHANGE BAR ( I ) LOCATED IN THE LEFT MARGIN IS FOR THE CONVENIENCE OF THE USER IN LOCATING AREAS WHERE TECHNICAL REVISIONS, NOT EDITORIAL CHANGES, HAVE BEEN MADE TO THE PREVIOUS ISSUE OF THIS DOCUMENT. AN (R) SYMBOL TO THE LEFT OF THE DOCUMENT TITLE INDICATES A COMPLETE REVISION OF THE DOCUMENT.

9. INTERPRETATION OF DRAWING PER ARP4296.

 An SAE International Group	<b>AEROSPACE STANDARD</b>	<b>SAE AS4860</b> SHEET 2 OF 3	<b>REV.</b> <b>A</b>
	FITTING, NIPPLE, PIPE, EXTERNAL THREAD		