

ADOPTION NOTICE

SAE-AS9360, "NUT, PLAIN, HEX-DRILLED - A-286, SILVER PLATED", was adopted on 31-AUG-00 for use by the Department of Defense (DoD). Proposed changes by DoD activities must be submitted to the DoD Adopting Activity: Commander, Defense Supply Center Philadelphia, ATTN: DSCP-ITAA, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Copies of this document may be purchased from the Society of Automotive Engineers 400 Commonwealth Drive Warrendale, Pennsylvania, United States, 15096-0001.

<http://www.sae.org/>

Custodians:

Army - AV
Navy - AS
DLA - IS

Adopting Activity:

DLA - IS

SAENORM.COM : Click to view the full PDF of AS9360

FSC 5310

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

AS9360			FEDERAL SUPPLY CLASS 5310
	NOTICE		
<p>THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS9360B, NOTICE 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS9360B, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.</p> <p>THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.</p> <p>UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.</p>			
			
THIRD ANGLE PROJECTION		ISSUED 2000-08	
PREPARED BY SAE COMMITTEE E-25		PROCUREMENT SPECIFICATION: NONE	
 The Engineering Society For Advancing Mobility Land Sea Air and Space® INTERNATIONAL 400 Commonwealth Drive, Warrendale, PA 15096-0001		AEROSPACE STANDARD NUT, PLAIN, HEX-DRILLED - A-286, SILVER PLATED	
		AS9360 SHEET 1 OF 3	

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

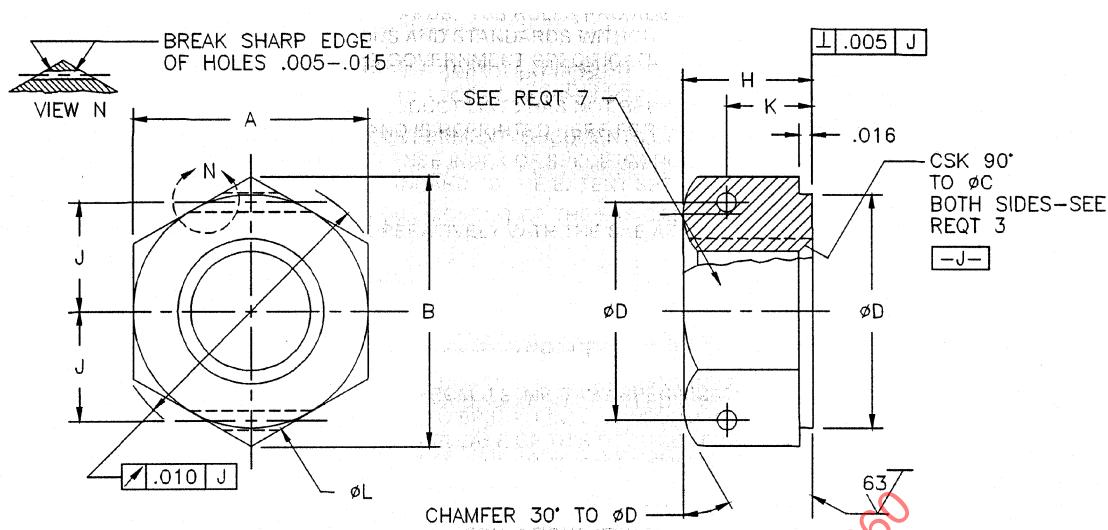


TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NUMBER	T THREAD UNJF-3B	A		B	ØC	ØD	H	J	K	L ^u	APPROX WEIGHT LB/100
		MIN	MAX								
-04	.112-48	.243	.251	.277	.122	.250	.136	.090	.068	.031	.17
-06	.138-40	.305	.313	.347	.148	.312	.136	.115	.068	.047	.27
-08	.164-36	.336	.345	.383	.174	.344	.136	.135	.068	.047	.32
-09	.190-32	.367	.376	.419	.200	.375	.156	.150	.078	.047	.37
-10	.250-28	.430	.439	.491	.260	.438	.219	.185	.110	.047	.75
-11	.3125-24	.492	.502	.561	.322	.500	.266	.215	.133	.047	1.11
-12	.375-24	.553	.564	.631	.385	.562	.328	.245	.164	.047	1.63
-13	.4375-20	.679	.690	.775	.448	.688	.375	.300	.187	.070	2.93
-14	.500-20	.741	.752	.846	.510	.750	.438	.335	.219	.070	3.84
-15	.5625-18	.805	.877	.987	.572	.875	.484	.385	.362	.070	6.04
-16	.625-18	.928	.940	1.059	.635	.938	.547	.420	.400	.070	7.50
-17	.750-16	1.052	1.064	1.200	.760	1.062	.656	.490	.485	.070	10.69
-18	.875-14	1.239	1.252	1.414	.885	1.250	.766	.555	.570	.070	17.50
-19	1.000-12	1.427	1.440	1.628	1.010	1.438	.875	.655	.655	.070	26.78

1/ "L" DIAMETER THRU 2 HOLES LOCATED WITHIN .005 OF THE TRUE POSITION (⊕)
FOR -04 THRU 11: .010 FOR -12 AND LARGER

REQUIREMENTS:

1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL IN ACCORDANCE WITH AMS 5732 OR AMS 5737.
2. FINISH: SILVER PLATE IN ACCORDANCE WITH AMS 2410, .0002-.0006 THICK AT THREAD PD. DIMENSIONS SPECIFIED ARE AFTER PLATING.
3. THREADS: THREADS IN ACCORDANCE MIL-S-8879.
4. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCE SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
5. SURFACE TEXTURE: SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED, SHALL BE 125 MICROINCHES IN ACCORDANCE WITH ANSI B46.1.