

# ISO

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION

## ISO RECOMMENDATION R 1483

SLOTTED RAISED COUNTERSUNK (OVAL) HEAD TAPPING SCREWS

DIMENSIONS IN MILLIMETRES AND INCHES

1st EDITION

October 1970

COPYRIGHT RESERVED

The copyright of ISO Recommendations and ISO Standards belongs to ISO Member Bodies. Reproduction of these documents, in any country, may be authorized therefore only by the national standards organization of that country, being a member of ISO.

For each individual country the only valid standard is the national standard of that country.

Printed in Switzerland

Also issued in French and Russian. Copies to be obtained through the national standards organizations.

## SLOTTED RAISED COUNTERSUNK (OVAL) HEAD TAPPING SCREWS

### DIMENSIONS IN MILLIMETRES AND INCHES


#### 1. SCOPE

This ISO Recommendation specifies dimensions, in millimetres and inches, of slotted raised countersunk (oval) head tapping screws, and provides a system of standard lengths, i.e. recommended combinations of thread size and nominal length.


#### 2. DIMENSIONS

Principal dimensions are given in the Table opposite. For thread dimensions and thread ends see ISO Recommendation R 1478, *Tapping screw thread – Dimensions in millimetres and inches*.

Nominal sizes of series I should be preferred.

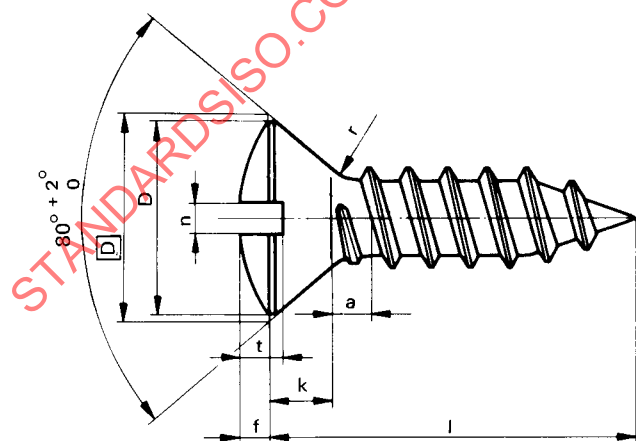

Cone end (type AB)



$a \leq P$  (Pitch)

Flat end (type B)

TABLE - Principal dimensions

Dimensions in millimetres and inches

Dimensions in millimetres and inches																				
Nominal size		Series I			2		4		6		8	10		14( $\frac{1}{4}$ )						
		Series II	0	1		3		5		7				12		16( $\frac{5}{16}$ )				
<i>D</i>	theor.	mm	3.02	3.71	4.37	5.06	5.72	6.40	7.09	7.75	8.43	9.78	11.13	12.88	16.13					
		in	0.119	0.146	0.172	0.199	0.225	0.252	0.279	0.305	0.332	0.385	0.438	0.507	0.635					
	min.	mm	2.51	3.12	3.73	4.34	4.95	5.59	6.20	6.81	7.42	8.64	9.88	11.48	14.43					
		in	0.099	0.123	0.147	0.171	0.195	0.220	0.244	0.268	0.292	0.340	0.389	0.452	0.568					
<i>k</i>	≈	mm	0.89	1.09	1.30	1.50	1.70	1.90	2.11	2.31	2.54	2.95	3.35	3.89	4.85					
		in	0.035	0.043	0.051	0.059	0.067	0.075	0.083	0.091	0.100	0.116	0.132	0.153	0.191					
<i>f</i>		mm	0.51	0.63	0.76	0.89	0.97	1.02	1.14	1.27	1.32	1.52	1.73	2.03	2.54					
		in	0.020	0.025	0.030	0.035	0.038	0.040	0.045	0.050	0.052	0.060	0.068	0.080	0.100					
<i>n</i>	min.	mm	0.41	0.48	0.58	0.69	0.79	0.89	0.99	0.99	1.14	1.27	1.42	1.63	1.83					
		in	0.016	0.019	0.023	0.027	0.031	0.035	0.039	0.039	0.045	0.050	0.056	0.064	0.072					
	max.	mm	0.58	0.66	0.79	0.89	0.99	1.09	1.22	1.22	1.37	1.52	1.70	1.90	2.13					
		in	0.023	0.026	0.031	0.035	0.039	0.043	0.048	0.048	0.054	0.060	0.067	0.075	0.084					
<i>t</i>	min.	mm	0.63	0.79	0.94	1.09	1.24	1.40	1.52	1.68	1.83	2.13	2.44	2.84	3.58					
		in	0.025	0.031	0.037	0.043	0.049	0.055	0.060	0.066	0.072	0.084	0.096	0.112	0.141					
	max.	mm	0.76	0.97	1.14	1.32	1.50	1.70	1.88	2.06	2.24	2.62	2.97	3.45	4.34					
		in	0.030	0.038	0.045	0.052	0.059	0.067	0.074	0.081	0.088	0.103	0.117	0.136	0.171					
<i>r</i>	max.	mm	0.61	0.76	0.89	1.02	1.17	1.32	1.42	1.57	1.68	1.90	2.18	2.46	3.20					
		in	0.024	0.030	0.035	0.040	0.046	0.052	0.056	0.062	0.066	0.075	0.086	0.097	0.126					
Nominal length <i>l</i>			Standard lengths																	
			mm	in																
3.2			$\frac{1}{8}$			—	—	—	—	—	—	—	—	—	—	—	—	—		
4.5			$\frac{3}{16}$					—	—	—	—	—	—	—	—	—	—	—		
6.5			$\frac{1}{4}$						—	—	—	—	—	—	—	—	—	—		
9.5			$\frac{3}{8}$							—	—	—	—	—	—	—	—	—		
13			$\frac{1}{2}$								—	—	—	—	—	—	—	—		
16			$\frac{5}{8}$									—	—	—	—	—	—	—		
19			$\frac{3}{4}$										—	—	—	—	—	—		
22			$\frac{7}{8}$											—	—	—	—	—		
25			1												—	—	—	—		
32			$1\frac{1}{4}$													—	—	—		
38			$1\frac{1}{2}$														—	—		
45			$1\frac{3}{4}$															—		
50			2															—		

The standard lengths are given between the stepped solid lines (———).

The upper stepped solid line (———) is the limit of the minimum practical length for both types.

Flat end tapping screws (type B) with lengths above the stepped broken line (— — —) are short screws and those below this stepped line are long screws, in accordance with ISO Recommendation R 1478.